

WORKING

CATALOGUE



Light as an Expression of life

An Innovation Leader in the Lighting World

Lux Luci is a new and exiting Italian lighting company in todays ever fast evolving architectural lighting market.

Our team consist of professionals that have been in the lighting industry for over 25 years.

Our mission is to excel in delivering and supplying lighting solutions to improve the comfort of the environment we are living in.

With offices in Asia, Middle East and Europe Lux Luci is a truly international lighting company

Our forte is the attention to detail and constant innovation combined with the experience and know how acquired over the years.

Lux Luci is sharing our passion for light and provides quality lighting solutions for our international clients and partners in today's challenging indoor and outdoor architectural lighting environment.

What We Offer:



Solid-state Lighting Expertise

Enabling customers worldwide with our lighting knowledge, experienced team and network of partners.



Supply Chain & Business Solutions

Facilitating customer growth by providing world class service, global supply chain solutions, a dedicated global LED distribution system, flexible payment terms, and value-added loyalty programs.



Design Support Services

Accelerating customers adoption with our unique suite of design tools, global lighting resource centers, application solutions and extensive product portfolio.

Beam angle,

Is the magic of lighting control. For LED lighting, normally a secondary optical device like a lens or reflector is used to provide different beam angles.


Lux level & beam area

A narrow beam product offers a high central lux level and small beam area;

A wide beam product offers a low lux level and big beam area;

Hot spot VS even beam

Narrow beam products can focus the light to certain object while the wide beam products are used to level up the room brightness.

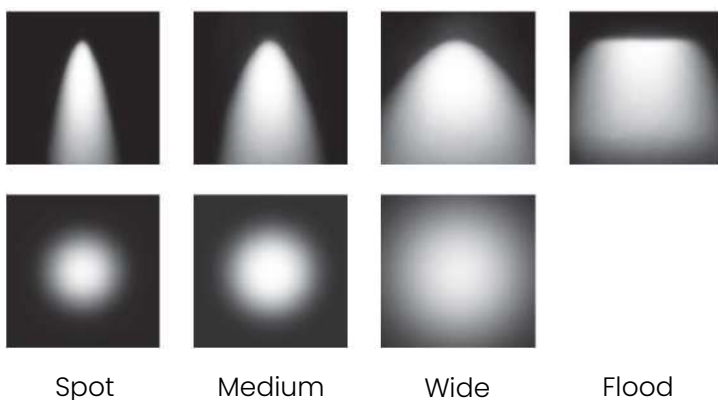

Color Rendering Index (shorted for CRI or Ra), is a very important figure to measure the quality of light. Generally speaking, the higher CRI of the light, the vividier or the illuminated object will present.

Is CRI higher the better?

Usually CRI >80 can be complied to most illuminating occasions;

And lighting products of CRI >90 is widely used in restaurants, hotels and premium residential areas.

Luminaires with CRI >97 are normally adopted to high light performance areas like galleries and museums.

PS: By using a high CRI product, even if the light is shallower, you can still feel comfortable.



Finishes

Powder Coating



AW
White



AB
Black



WH
Plain
White



BK
Plain
Black



AG
Texture
Grey



SG
Silver
Grey



MTB
Metallic
Bronze

Nature Finishing



BSS
Brushed
Stainless
Steel



NC
Nature
Aged
Copper



NB
Natural
Brass



NSS
Nature
Stainless
Steel



WD
Wood

Plating



CH
Chrome



BN
Brushed
Nickel



BR
Brass



BB
Brushed
Brass



DK
Dark
Chrome



RG
Rose
Gold

Anodizing



BA
Brush
Anodizing



MS
Matte
Silver



SB
Sand
Brass



BZ
Brushed
Bronze



BB
Brushed
Brass



MB
Matte
Black



CATALOGUE

INTERIOR

DOWNLIGHTS

Deep
Reflect
Blackhole
Scania
Cave
Cube
Semi
Shower
Gyro
Cabinets
Hospitality

SURFACE MOUNTED

Slim
Cup
Scania Surface
Compact

Pendants

Track
Low Voltage Track
Wall Luminaires
Reading
Steps

EXTERIOR

Ceiling
Wall Luminaires
Linear
In-Ground
Recessed Wall Luminaires
Steps
Flood Lights
Bollards

INTERIOR

DOWNLIGHTS

Deep



NEW
Cono 17
P.17



Cono 30
P.18



Cono
Trimless 30
P.19



Meta 66
P.20



NEW
Meta 75
P.21



Meta 82
P.22



NEW
Meta
Trimless 30
P.23



NEW
Meta
Trimless 40
P.24



Meta
Trimless 66
P.25



NEW
Wiro 35
P.26



Finlin 40
P.27



Finlin
Trimless 40
P.28



Tram 40
P.29



Dro 50
P.30



NEW
Roby 50
P.31



NEW
Roby
Trimless 40
P.32



Strex
Trimless 50
P.33



Bento 82
P.34



Bento
Trimless 82
P.35



NEW
Solli 72
P.36



Docus
Trimless 30
P.37



NEW
Docus
Trimless 90
P.38



NEW
Pirro 75
P.39



NEW
Pirro
Trimless 75
P.40



NEW
Pirro
Square 75
P.41



NEW
Pirro Square
Trimless 75
P.42



NEW
Oris 90
P.43



NEW
Oris
Trimless 90
P.44



NEW
Oris Square 90
P.45



NEW
Oris Square
Trimless 90
P.46

Reflect



Cono 30
P.48



Hexo 30
P.49



NEW
Sara 30
P.50



Roby 50
P.51



NEW
Roby
Curve 55
P.52



NEW
Finlin 55
P.53



NEW
Petite 120
P.54



NEW
Whaka 120
P.55



NEW
Mirbi 120
P.56



NEW
Mirbi 82
P.57



Mirbi 140
P.58



NEW
Mirbi
Trimless 60
P.59



Mirbi
Trimless 82
P.60

INTERIOR

Blackhole



Odrey 40
P.62



Lito 50
P.63



Romor 30
P.64



Finlin 30
P.65



Roby 40
P.66



NEW
Roby AC 38
P.67



Domino 60
P.68



Mick 65
P.69



Mirbi 75
P.70



Dinor 82
P.71



Dinor
Trimless 82
P.72



Wetro 82
P.73



Wetro
Trimless 82
P.74

Scania



Mick 82
P.76



Mick
Square 85
P.77



Mick
Rectangle 160
P.78



Ruvi 82
P.79



Ruvi
Trimless 82
P.80



Ruvi
Deep 82
P.81



Ruvi
Square 90
P.82



Ruvi Square
Trimless 100
P.83



Ruvi
Rectangle 175
P.84



Ruvi Rectangle
Trimless 190
P.85



Ray 82
P.86



Ray
Square 90
P.87

Cave



Mirbi
Square 62
P.89



Mirbi Square
Trimless 62
P.90



Mirbi
Rectangle 62
P.91



Mirbi Rectangle
Trimless 120
P.92



NEW
Mick 65
P.93



NEW
Mick
Trimless 65
P.94

Cube



Reto 55
P.96



Reto 95
P.97



Reto 135
P.98



Clea 100
P.99



Clea 190
P.100



Clea 280
P.101



Elisa
Square 100
P.102



Elisa
Retangle 200
P.103



Mirage 131
P.104



Mirage 250
P.105



Mirage 367
P.106

Semi



Ovalis 40
P.108



Aky 65
P.109



Pablito 65
P.110



Antille 85
P.111



Box 85
P.112



Adamas 90
P.113



NEW
Wetro 75
P.114



NEW
Wetro
Trimless 75
P.115

Shower



NEW
Opera 20
P.117



Mick 70
P.118



Mick
Square 70
P.119



Mick
Power 82
P.120



Mick
Linear 150
P.121

Gyro



NEW
Fary 70
P.123



NEW
Wetro 20
P.124



NEW
Wetro 40
P.125



NEW
Antille 90
P.126



NEW
Antille 175
P.127



NEW
Matrix 175
P.128



NEW
Matrix 260
P.129

Cabinets



Alla
Gimble 35
P.131



Alla
Washer 50
P.132



Alla
Drop 35
P.133



Manto 25
P.134



Roby 40
P.135



Romor
Tilt 45
P.136



Antille 50
P.137



Tano 65
P.138



Elio 50
P.139



NEW
Soho 565
P.140



NEW
Soho 1125
P.141

INTERIOR

Hospitality



Opera Blade
Washer 200
P.143



Opera Telescope
Gyro 70
P.144



Opera Cylinder
Gyro 60
P.145



Opera Spy
Eye 100
P.146



Opera
Washer 72
P.147



Opera
Washer 82
P.148



Opera Trimless
Washer 85
P.149



NEW

Opera Tilt
Halo 82
P.150

SURFACE MOUNTED

Slim



NEW

Conica 35
P.153



Conica 45
P.154



Conica 60
P.155



NEW

Wetro 35
P.156



Wetro 40
P.157



Wetro 45
P.158

Cup



Wetro 62
P.159



Conica 70
P.160



NEW

Bull 150
P.166

Scania Surface



Atom 100
P.162



Atom
Square 88
P.162



Atom
Rectangle 170
P.163



Bull
Square 88
P.164



Bull
Rectangle 170
P.165



NEW

Bull 90
P.166



NEW

Bull 120
P.166

Compact



NEW

Conica AC 50
P.168



NEW

Orient Fix 80
P.169



Conica Fix 80
P.170



Conica Tilt 97
P.171



Conica
Adjustable 85
P.172



NEW

Conica
Adjustable Halo 90
P.173



Conica
Multi 260
P.174

Pendants



Track



Low Voltage Track



INTERIOR

Wall Luminaires



NEW
Merlin 90
P.213



NEW
Grillo 110
P.214



Pulce 200
P.215



Civetta 240
P.216



Relogo 60
P.217



Relogo 100
P.217



Salin 220
P.218



Salin 280
P.218



Kite 145/194/248
P.219



Glory 135/180/230
P.220



Trocia 400
P.221



NEW
Trocia
Rectangle 500
P.222



NEW
Trocia
Rectangle 800
P.222



Lent
Wall 120
P.223



NEW
Lent
Wall 180
P.223



NEW
Celeste 125
P.224



NEW
Celeste 180
P.224



NEW
Celeste
Square
P.225

Reading



Ruspa 153
P.227



Elio 105
P.228



Oca
Neck 120
P.229



Glory
USB 150
P.230



Glory
Rectangle USB 180
P.230



NEW
Glory
Rectangle 230
P.231

Steps



Virtus 83
P.233



Virtus
Square 83
P.234



Ostrica
Square 83
P.235



Elos
Square 83
P.236



Elos 83
P.237



Jan 83
P.238



NEW
Conica
Eyelid 50
P.239



NEW
Conica
Marker 50
P.240



Wanda 200
P.241



Wanda
Trimless 200
P.241

EXTERIOR

Ceiling



Spill Ball 140
P.245



Vasiere 70
P.246



Conica
Mini 50
P.247



Conica
Zoom LV 40
P.248

Wall Luminaires



Spill Ball 140
P.250



NEW
Merlin
Downshine 60
P.251



NEW
Regolo
Downshine 100
P.252



Merlin 600
P.253



Clea 180
P.254



Clea 300
P.255

Linear



NEW
Mirage Linear 1000
P.257

In-Ground



Solli 30
P.259



Nano
Trimless 30
P.260



Nano
Trimless 60
P.261



NEW
Nano
Spot 25
P.262



NEW
Nano
Eyelid 25
P.263



NEW
Nano
Spot 74
P.264



NEW
Nano
Marker 30
P.265



NEW
Nano
Washer 55
P.266

Recessed Wall



Madison 30
P.268



Faro 30
P.269



Rialto 30
P.270



NEW
Penta 30
P.271

EXTERIOR

Steps



NEW
Getto 70
P.273



Lavori Round
Spray 24V 55
P.274



Lavori Round
Pinhole 24V 55
P.274



Lavori Square
Spray 24V 55
P.275



Lavori Square
Pinhole 24V 55
P.275



Chia 100
P.276



Wanda
Exterior 200
P.277

Flood Lights



Pont
Asymmetric 70
P.279



Pont
Washer 120
P.280



NEW
Pont
Jumbo 100
P.281



Boleto
Spot 40
P.282



NEW
Satori LV 60
P.283



NEW
Regolo 50
P.284



NEW
Regolo 70
P.285



NEW
Tano
Asymmetric 45
P.286



NEW
Perla 20
P.287



NEW
Squash 20
P.288



NEW
Squash 25
P.289



NEW
Lira 12
P.290



NEW
Minion 15
P.291



NEW
Reiki 120
P.292

Bollards



Benny 600
P.294



NEW
Regolo 100
P.295



NEW
Susy 300
P.296



NEW
Susy 600
P.296

INTERIOR

From ceiling to wall, wall to floor, Lux Luci provides a wide range of interior lighting products.








Deep



Deep series is one of the most classic range of Lux Luci's products; They aren't noble products, not catching people's attention, but making people enjoy the comfortable light time after time.

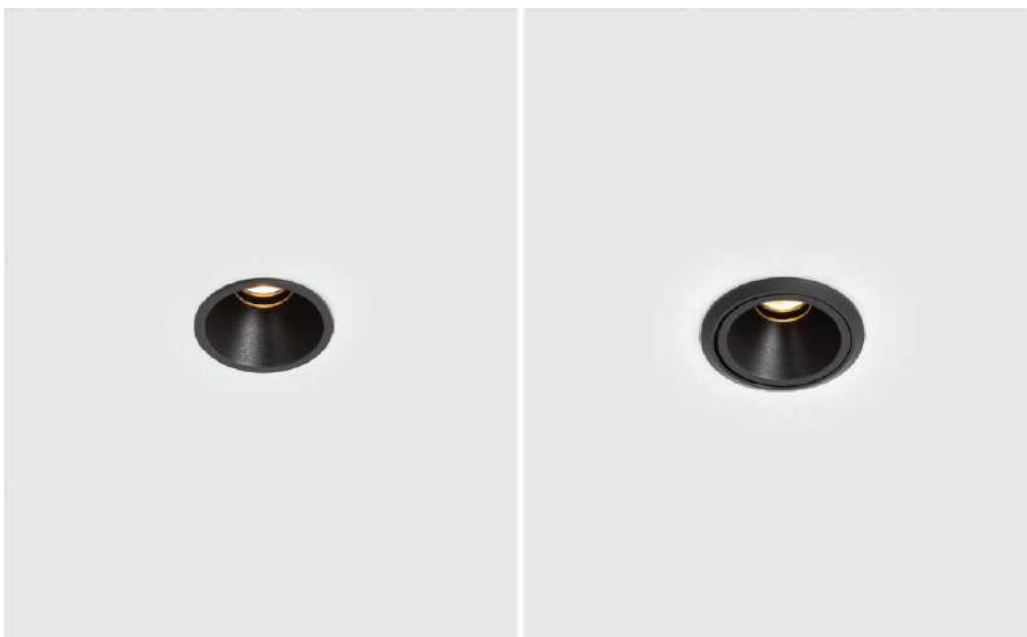SLIGHTLY DOWNLIGHTS



Sketch

 Cutout: 17mm
 5-25mm



NEW Cono 17

Micro fixed spot;
 A degree recessed trim;
 Low UGR;
 Nice & even beam curve;
 Optional adaptor ring;

TL-DL-3766

Light Source

1W 95lm, 350mA 3V, CRI>90, SDCM<3
High Power LED

Gear

This product is supplied with LED driver.

Accessories

Adaptor ring

Finishes


☐ AW White
☒ AB Black

Beam Angle



☐ 22° ☐ 40°
☒ III ☒ CE ☒ IP44

Light Distribution For 3000K Narrow 20°
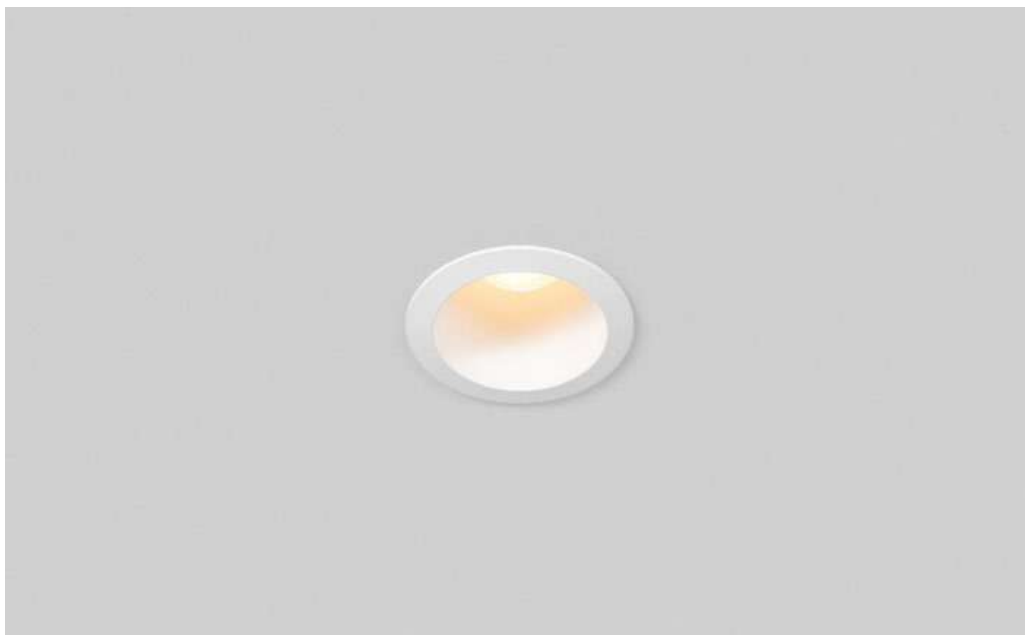
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 263.0 | Ø0.36 |
| 2 | 65.76 | Ø0.72 |
| 3 | 29.23 | Ø1.08 |
| 4 | 16.44 | Ø1.44 |
| 5 | 10.52 | Ø1.80 |



Sketch

 Cutout: 32-35mm
 5-25mm



Cono 30

Micro fixed spot;
 A degree recessed trim;
 Low UGR;
 High lumen output;

TL-DL-3437

Light Source

7W 512lm, 180mA 36V, CRI>90, SDCM<3
 LES04

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

22° 40°
  

Light Distribution For 3000K

Spot 16.5°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2645 | Ø0.29 |
| 2 | 661.2 | Ø0.58 |
| 3 | 293.9 | Ø0.87 |
| 4 | 165.2 | Ø1.16 |
| 5 | 105.8 | Ø1.45 |

Medium 33.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1985 | Ø0.35 |
| 2 | 496.3 | Ø0.70 |
| 3 | 220.6 | Ø1.06 |
| 4 | 124.1 | Ø1.41 |
| 5 | 79.41 | Ø1.77 |



Sketch

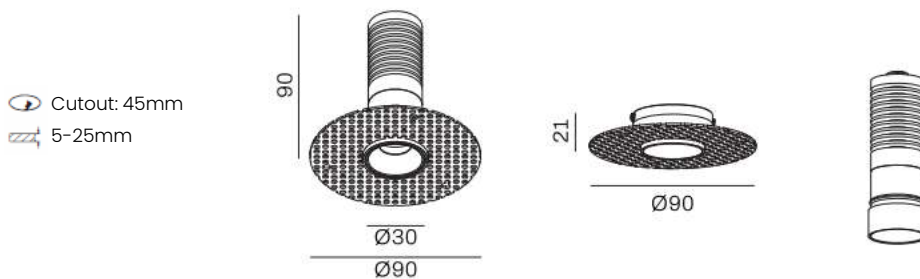

Cono Trimless 30

Micro fixed spot;
A degree recessed trim;
Low UGR;
High lumen output;

TL-DL-3559

Light Source

7W 447lm, 180mA 36V, CRI>90, SDCM<3
LES04

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 20° ☐ 30° ☐ 40°
☒ III ☒ CE ☒ IP21

Light Distribution For 3000K

Spot 18°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2149 | Ø0.31 |
| 2 | 537.2 | Ø0.63 |
| 3 | 238.8 | Ø0.95 |
| 4 | 134.3 | Ø1.26 |
| 5 | 85.95 | Ø1.58 |

Medium 32°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 633.2 | Ø0.58 |
| 2 | 158.3 | Ø1.16 |
| 3 | 70.36 | Ø1.74 |
| 4 | 39.58 | Ø2.32 |
| 5 | 25.33 | Ø2.90 |


Wide 39°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 442.2 | Ø0.71 |
| 2 | 110.6 | Ø1.43 |
| 3 | 49.14 | Ø2.15 |
| 4 | 27.64 | Ø2.87 |
| 5 | 17.69 | Ø3.58 |



Sketch

 Cutout: 68mm
 5-25mm



Meta 66

Slim trim fixed downlight;
Deep recessed;
Low UGR;

TL-DL-3241

Light Source

10W 877lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°



Light Distribution For 3000K

Medium 36°



Wide 47°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1218 | Ø0.65 |
| 2 | 304.6 | Ø1.30 |
| 3 | 135.4 | Ø1.95 |
| 4 | 76.15 | Ø2.60 |
| 5 | 48.74 | Ø3.25 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1399 | Ø0.86 |
| 2 | 349.7 | Ø1.73 |
| 3 | 155.4 | Ø2.60 |
| 4 | 78.44 | Ø3.47 |
| 5 | 55.96 | Ø4.34 |



Sketch

 Cutout: 74mm
 5-25mm



NEW Meta 75

Deep recessed & slim trim;
 Easy maintenance;
 Low-glare;
 Downlight for indoor use;

TL-DL-3598

Light Source

7W 976lm, 350mA 18V, CRI>90, SDCM<2
 LES09





Gear

This product is supplied with LED driver.

Finishes



AW White
AB Black


Beam Angle

18° 24° 38° 60°
   



Sketch

 Cutout: 82mm
 5-25mm



Meta 82

Slim trim fixed downlight;
Deep recessed;
Low UGR;

TL-DL-3299

Light Source

15-20W 863lm, 350-500mA 36V, CRI>90,
SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°



Light Distribution For 3000K

Medium 28°



Wide 56°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1807 | Ø0.50 |
| 2 | 451.7 | Ø1.00 |
| 3 | 200.8 | Ø1.51 |
| 4 | 112.9 | Ø2.01 |
| 5 | 72.27 | Ø2.51 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1399 | Ø0.86 |
| 2 | 349.7 | Ø1.73 |
| 3 | 155.4 | Ø2.60 |
| 4 | 78.44 | Ø3.47 |
| 5 | 55.96 | Ø4.34 |



Sketch

-  Cutout: 45-50mm
-  5-25mm



NEW Meta Trimless 30

Compact design;
Deep recessed bezel;

TL-DL-3356

Light Source

7W 45lm, 180mA 36V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with LED driver.

Finishes

- AW** White
- AB** Black

Beam Angle

- 15°
- 24°
- 36°
- 
- 
- IP54**



Light Distribution For 3000K


Medium 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1642 | ø0.45 |
| 2 | 410.6 | ø0.91 |
| 3 | 182.5 | ø1.36 |
| 4 | 102.6 | ø1.82 |
| 5 | 65.69 | ø2.27 |



Sketch

 Cutout: 50mm
 5-25mm



NEW Meta Trimless 40

Deep recessed bezel;
 40mm installed aperture;
 High lumen outputs;
 Low UGR design;

TL-DL-3372

Light Source

10W 670lm, 250mA 36V, CRI>90, SDCM<2
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
 AB Black

Beam Angle

18° 24° 36°





Light Distribution For 3000K


Wide 36.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2120 | Ø0.65 |
| 2 | 530.0 | Ø1.30 |
| 3 | 235.5 | Ø1.95 |
| 4 | 132.5 | Ø2.60 |
| 5 | 84.80 | Ø3.25 |



Sketch

 Cutout: 80mm
 5-25mm

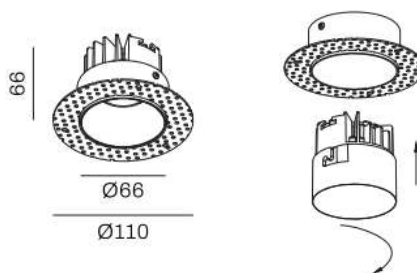

Meta Trimless 66

Classic fixed downlight;
Trimless design;
Low UGR;

TL-DL-3281

Light Source

10W 880lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36°



Light Distribution For 3000K

Medium 36°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1218 | Ø0.65 |
| 2 | 304.6 | Ø1.30 |
| 3 | 135.4 | Ø1.95 |
| 4 | 76.15 | Ø2.60 |
| 5 | 48.74 | Ø3.25 |

Wide 47°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1399 | Ø0.86 |
| 2 | 349.7 | Ø1.73 |
| 3 | 155.4 | Ø2.60 |
| 4 | 78.44 | Ø3.47 |
| 5 | 55.96 | Ø4.34 |



Sketch

 Cutout: 35mm
 5-25mm



NEW Wiro 35

Mini spot with curved bezel;
Reflector type;
Compact body;
High delivered lumens;

TL-DL-3621

Light Source

8W 397lm, 200mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

22° 40°





Light Distribution For 2400K

Medium 18°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1911 | Ø0.34 |
| 2 | 477.7 | Ø0.67 |
| 3 | 212.3 | Ø1.01 |
| 4 | 119.4 | Ø1.35 |
| 5 | 76.43 | Ø1.69 |



Sketch

 Cutout: 45mm
 5-25mm



NEW Finlin 40

Slim trim deep recessed spot;
10W fitting with 45mm small cutout;
Low UGR controlled;

TL-DL-3438

Light Source

10W 650lm, 250mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

17° 24° 36°



Light Distribution For 3000K

Medium 20.8°



Wide 36°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2357 | Ø0.37 |
| 2 | 589.2 | Ø0.74 |
| 3 | 261.9 | Ø1.10 |
| 4 | 147.3 | Ø1.47 |
| 5 | 94.28 | Ø1.84 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2120 | Ø0.65 |
| 2 | 530.0 | Ø1.30 |
| 3 | 235.5 | Ø1.95 |
| 4 | 132.5 | Ø2.60 |
| 5 | 84.80 | Ø3.25 |



Sketch

 Cutout: 50mm
 5-25mm

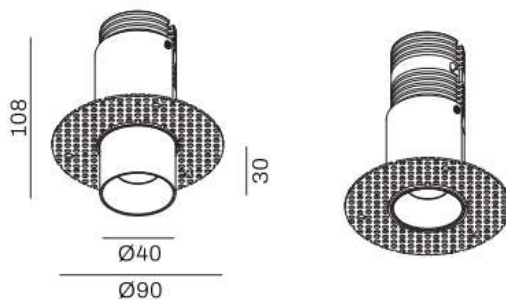

NEW Finlin Trimless 40

Powerful trimless spot;
2 level installation;
Very low UGR;

TL-DL-3560

Light Source

10W 650lm, 250mA 36V, CRI>90, SDCM<2
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

17° 24° 36°



Light Distribution For 3000K

Medium 20.8°



Wide 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2357 | Ø0.37 |
| 2 | 589.2 | Ø0.74 |
| 3 | 261.9 | Ø1.10 |
| 4 | 147.3 | Ø1.47 |
| 5 | 94.28 | Ø1.84 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2120 | Ø0.65 |
| 2 | 530.0 | Ø1.30 |
| 3 | 235.5 | Ø1.95 |
| 4 | 132.5 | Ø2.60 |
| 5 | 84.80 | Ø3.25 |



Sketch

 Cutout: 38mm
 5-25mm



Tram 40

Shallow void fixed spot;
Low UGR;
IP44;

TL-DL-3500

Light Source

5W 300lm, 500mA 9V, CRI>90, SDCM<3
LES04

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 20° ☐ 36° ☐ 50°



Light Distribution For 3000K

Spot 15.6°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1972 | ø0.27 |
| 2 | 492.9 | ø0.55 |
| 3 | 219.1 | ø0.82 |
| 4 | 123.2 | ø1.09 |
| 5 | 78.87 | ø1.37 |

Medium 20.1°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1985 | ø0.35 |
| 2 | 496.3 | ø0.71 |
| 3 | 220.6 | ø1.06 |
| 4 | 124.1 | ø1.42 |
| 5 | 79.41 | ø1.77 |


Wide 35.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 835.0 | ø0.64 |
| 2 | 208.7 | ø1.28 |
| 3 | 92.77 | ø1.91 |
| 4 | 52.19 | ø2.55 |
| 5 | 33.40 | ø3.19 |



Sketch

 Cutout: 38mm
 5-25mm



Dro 50

Asymmetric optical design;
Mini fixed washer;
IP44;

TL-DL-3103

Light Source

5W 250lm, 500mA 9V, CRI>90, SDCM<3
High Power LED

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 36°
  

Light Distribution For 3000K

Spot 19°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1487 | Ø0.33 |
| 2 | 271.8 | Ø0.66 |
| 3 | 165.2 | Ø1.00 |
| 4 | 92.94 | Ø1.33 |
| 5 | 59.48 | Ø1.66 |

Medium 35°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 621.9 | Ø0.60 |
| 2 | 155.5 | Ø1.20 |
| 3 | 69.10 | Ø1.80 |
| 4 | 38.87 | Ø2.40 |
| 5 | 24.88 | Ø3.01 |



Sketch

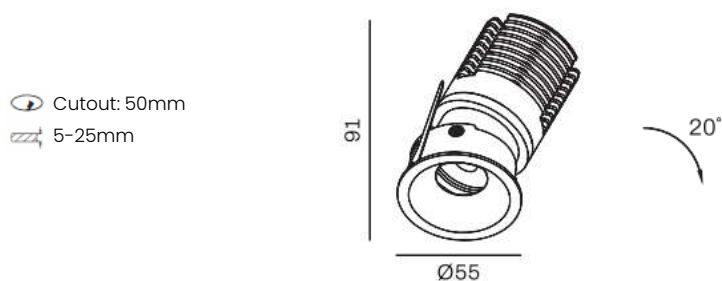

NEW Roby 50

Deep recessed;
Ultra compact body;
High power;
Available in 10D narrow beam;
Available with tunable white options;
Available with full spectrum COB;
IP54;

Light Source

10W 622lm, 250mA 36V, CRI>90, SDCM<3
LES03, LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

10° 15° 24° 36°
III CE IP54 D2W 6TW

TL-DL-3694



Light Distribution For 3000K


Spot 9°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2971 | Ø0.15 |
| 2 | 742.7 | Ø0.31 |
| 3 | 330.1 | Ø0.46 |
| 4 | 185.7 | Ø0.61 |
| 5 | 118.8 | Ø0.76 |



Sketch

 Cutout: 50mm
 5-25mm



NEW Roby Trimless 40

Trimless adjustable spot;
20 degree tiltable;
Low UGR;
IP21;

TL-DL-3726

Light Source

10W 698lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°



Light Distribution For 2700K


Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3223 | Ø0.34 |
| 2 | 805.8 | Ø0.68 |
| 3 | 358.2 | Ø1.03 |
| 4 | 201.5 | Ø1.37 |
| 5 | 128.9 | Ø1.71 |



Sketch

Cutout: 65mm
 5-25mm

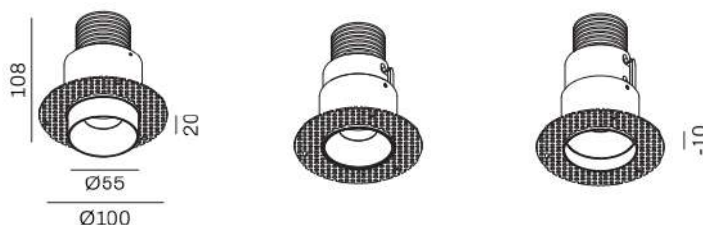

Strex Trimless 50

Trimless spot with 3 level adjustment;
Up to 13watt;
Very low UGR;

TL-DL-3561

Light Source

10W 820lm, 250mA 36V, CRI>90, SDCM<2
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36°



Light Distribution For 3000K

Spot 21.8°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2259 | Ø0.38 |
| 2 | 564.8 | Ø0.77 |
| 3 | 251.0 | Ø1.16 |
| 4 | 141.2 | Ø1.54 |
| 5 | 90.37 | Ø1.93 |

Medium 33.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2293 | Ø0.60 |
| 2 | 573.3 | Ø1.19 |
| 3 | 254.8 | Ø1.79 |
| 4 | 143.3 | Ø2.40 |
| 5 | 91.73 | Ø2.98 |



Sketch

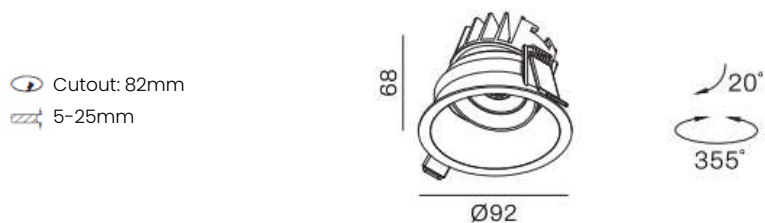

Bento 82

Slim trim adjustable downlight;
355 degree rotate & 20 degree tilt;
Low UGR;

TL-DL-3266

Light Source

10W 940lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°



Light Distribution For 3000K

Medium 36°



Wide 47°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1218 | Ø0.65 |
| 2 | 304.6 | Ø1.30 |
| 3 | 135.4 | Ø1.95 |
| 4 | 76.15 | Ø2.60 |
| 5 | 48.74 | Ø3.25 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1399 | Ø0.86 |
| 2 | 349.7 | Ø1.73 |
| 3 | 155.4 | Ø2.60 |
| 4 | 78.44 | Ø3.47 |
| 5 | 55.96 | Ø4.34 |



Sketch

 Cutout: 82mm
 5-25mm

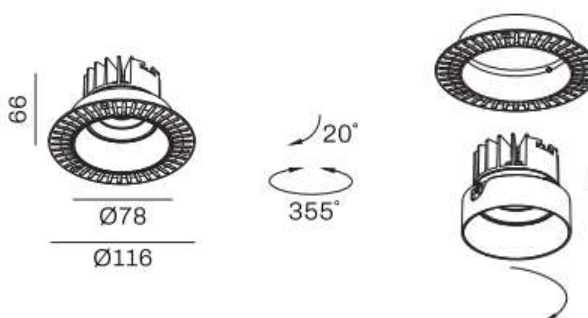

Bento Trimless 82

Adjustable trimless downlight;
355 degree rotate & 20 degree tilt;
Easy installation & maintenance;
Low UGR

TL-DL-3282

Light Source

10W 880lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°



Light Distribution For 3000K

Medium 36°



Wide 47°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1218 | Ø0.65 |
| 2 | 304.6 | Ø1.30 |
| 3 | 135.4 | Ø1.95 |
| 4 | 76.15 | Ø2.60 |
| 5 | 48.74 | Ø3.25 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1399 | Ø0.86 |
| 2 | 349.7 | Ø1.73 |
| 3 | 155.4 | Ø2.60 |
| 4 | 78.44 | Ø3.47 |
| 5 | 55.96 | Ø4.34 |



Sketch

 Cutout: 72mm
 5-25mm



NEW Solli 72

Deep fix downlight with micro steps;
Reflector type;
IP44;

TL-DL-3760

Light Source

10-15W 862lm, 250-350mA 36V, CRI>90,
SDCM<2
LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 38° 60°






Light Distribution For 3000K Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1156 | Ø0.81 |
| 2 | 289.1 | Ø1.61 |
| 3 | 128.5 | Ø2.42 |
| 4 | 72.28 | Ø3.23 |
| 5 | 46.26 | Ø4.03 |



Sketch

 Cutout: 60mm
 5-25mm



Docus Trimless 30

30mm light aperture up to 20W rated power, Micro size;
Flood beam;
Easy maintenance;
Driver remote, to be fitted in a self-maintainable area;

TL-DL-3555

Light Source

15-20W 1980lm, 350-500mA 3V,
CRI>90, SDCM<2
LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

60°






Light Distribution For 3000K Wide 55.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1475 | Ø1.04 |
| 2 | 368.7 | Ø2.10 |
| 3 | 163.9 | Ø3.14 |
| 4 | 92.17 | Ø4.19 |
| 5 | 58.99 | Ø5.24 |



Sketch

 Cutout: 95-100mm
 5-25mm



NEW Docus Trimless 90

30W powerful spot;
Low glare lens;
IP54;

TL-DL-3728

Light Source
30W 3300lm, 800mA 36V, CRI>90, SDCM<2
LES13

Gear
This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle



Light Distribution For 3000K

Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 11980 | Ø0.42 |
| 2 | 2995 | Ø0.84 |
| 3 | 1331 | Ø1.26 |
| 4 | 748.7 | Ø1.68 |
| 5 | 479.2 | Ø2.10 |

Medium 36°





| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 6326 | Ø0.71 |
| 2 | 1581 | Ø1.42 |
| 3 | 702.8 | Ø2.14 |
| 4 | 395.3 | Ø2.85 |
| 5 | 253.0 | Ø3.56 |


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2078 | Ø1.42 |
| 2 | 519.5 | Ø2.83 |
| 3 | 230.9 | Ø4.25 |
| 4 | 129.9 | Ø5.67 |
| 5 | 83.12 | Ø7.09 |



Sketch

-  Cutout: 75mm
-  5-25mm
-  Glass
-  Honey comb louvre



NEW Pirro 75

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Light Source

10W 920lm, 250mA 36V, CRI>90, SDCM<3
LES09








Gear

This product is supplied with LED driver.

Finishes

-  White
-  Black

Beam Angle

-  15°
-  24°
-  38°
-  60°
- 
- 
- 
- 

TL-DL-3717

Light Distribution For 3000K

Narrow 24°




Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2065 | Ø0.49 |
| 2 | 516.2 | Ø0.99 |
| 3 | 229.4 | Ø1.48 |
| 4 | 129.0 | Ø1.96 |
| 5 | 82.59 | Ø2.47 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1116 | Ø1.16 |
| 2 | 279.0 | Ø2.32 |
| 3 | 124.0 | Ø3.47 |
| 4 | 69.76 | Ø4.63 |
| 5 | 44.65 | Ø5.79 |



Sketch

-  Cutout: 85mm
-  5-25mm
-  2 Glass
-  2 Honey comb louvre



NEW Pirro Trimless 75

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Light Source

10W 920lm, 250mA 36V, CRI>90, SDCM<3
LES09


Gear

This product is supplied with LED driver.

Finishes

- ☐ AW White
- ☒ AB Black

Beam Angle

- ☐ 15°
 - ☐ 24°
 - ☐ 38°
 - ☐ 60°
- ☐ 
☐ CE
 ☐ IP54
 ☐ 

TL-DL-3719


Light Distribution For 3000K

Narrow 24°



Wide 60°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2065 | Ø0.49 |
| 2 | 516.2 | Ø0.99 |
| 3 | 229.4 | Ø1.48 |
| 4 | 129.0 | Ø1.96 |
| 5 | 82.59 | Ø2.47 |
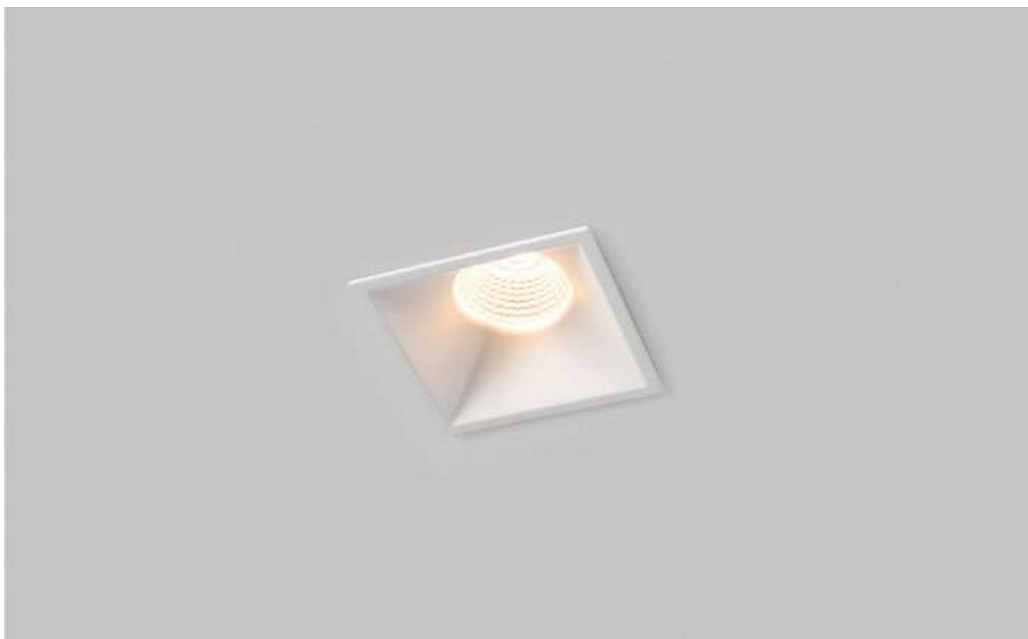
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1116 | Ø1.16 |
| 2 | 279.0 | Ø2.32 |
| 3 | 124.0 | Ø3.47 |
| 4 | 69.76 | Ø4.63 |
| 5 | 44.65 | Ø5.79 |



Sketch

-  Cutout: 75x75mm
-  5-25mm
-  Glass
-  Honey comb louvre



NEW Pirro Square 75

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Light Source

10W 920lm, 250mA 36V, CRI>90, SDCM<2
LES09






Gear

This product is supplied with LED driver.

Finishes

-  White
-  Black

Beam Angle

-  15°
-  24°
-  38°
-  60°
-  IP54
-  D2W 6TW





TL-DL-372I


Light Distribution For 3000K Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1493 | ø0.72 |
| 2 | 373.3 | ø1.43 |
| 3 | 165.9 | ø2.15 |
| 4 | 93.32 | ø2.87 |
| 5 | 59.73 | ø3.58 |



Sketch

-  Cutout: 88x88mm
-  5-25mm
-  2 Glass
-  2 Honey comb louvre

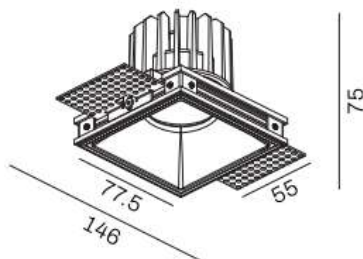

NEW Pirro Square Trimless 75

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different
beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

TL-DL-3730

Light Source

10W 920lm, 250mA 36V, CRI>90, SDCM<2
LES09

Gear

This product is supplied with LED driver.

Finishes

- AW White
- AB Black

Beam Angle

- 15° 24° 38° 60°
-   IP54 


Light Distribution For 3000K

Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1493 | Ø0.72 |
| 2 | 373.3 | Ø1.43 |
| 3 | 165.9 | Ø2.15 |
| 4 | 93.32 | Ø2.87 |
| 5 | 59.73 | Ø3.58 |



Sketch

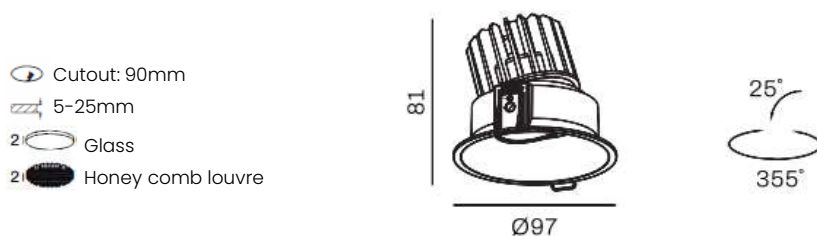

NEW Oris 90

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Light Source

10W 920lm, 250mA 36V, CRI>90, SDCM<3
LES09


Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle



TL-DL-3718


Light Distribution For 3000K

Medium 38°





Wide 60°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1407 | Ø0.71 |
| 2 | 351.7 | Ø1.43 |
| 3 | 156.3 | Ø2.15 |
| 4 | 87.92 | Ø2.86 |
| 5 | 56.27 | Ø3.58 |
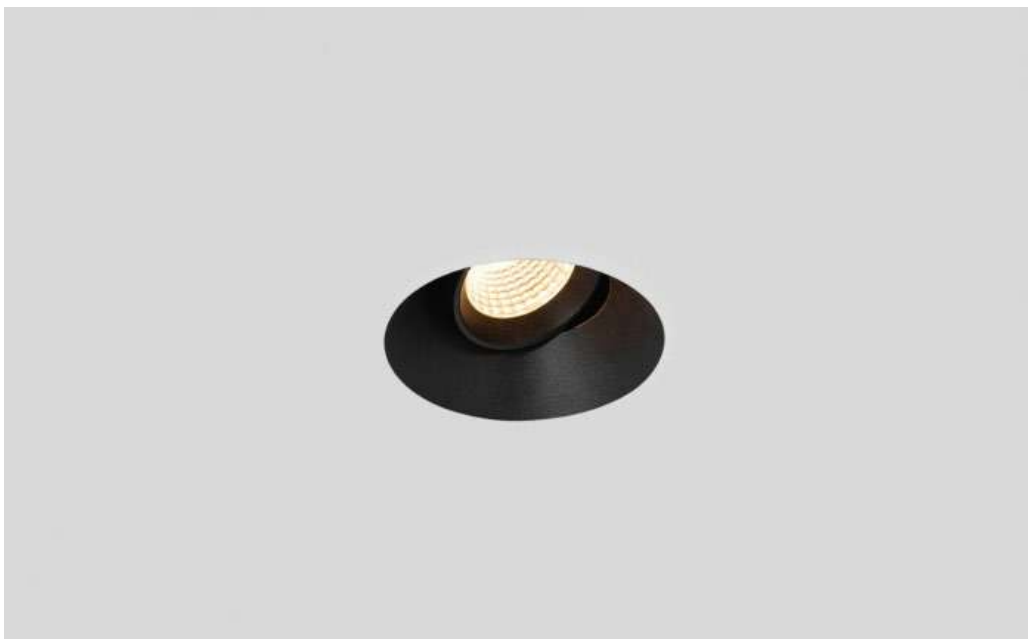
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1121 | Ø1.10 |
| 2 | 280.3 | Ø2.21 |
| 3 | 124.6 | Ø3.31 |
| 4 | 70.09 | Ø4.41 |
| 5 | 44.85 | Ø5.51 |



Sketch

-  Cutout: 100mm
-  5-25mm
-  2 Glass
-  2 Honey comb louvre

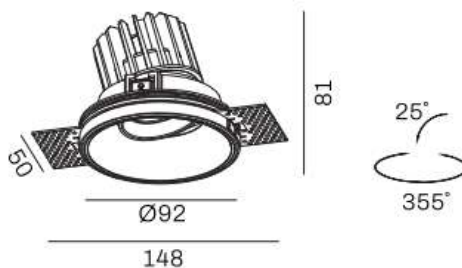

NEW Oris Trimless 90

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Light Source

10W 920lm, 250mA 36V, CRI>90, SDCM<3
LES09




Gear

This product is supplied with LED driver.

Finishes

- AW White
- AB Black

Beam Angle

- 15° 24° 38° 60°
-   IP54 

TL-DL-3720

Light Distribution For 3000K

Medium 38°





Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1407 | Ø0.71 |
| 2 | 351.7 | Ø1.43 |
| 3 | 156.3 | Ø2.15 |
| 4 | 87.92 | Ø2.86 |
| 5 | 56.27 | Ø3.58 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1121 | Ø1.10 |
| 2 | 280.3 | Ø2.21 |
| 3 | 124.6 | Ø3.31 |
| 4 | 70.09 | Ø4.41 |
| 5 | 44.85 | Ø5.51 |



Sketch

-  Cutout: 90x90mm
-  5-25mm
-  2 Glass
-  2 Honey comb louvre



NEW Oris Square 90

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

Light Source

10W 920lm, 250mA 36V, CRI>90, SDCM<2
LES09









Gear

This product is supplied with LED driver.

Finishes

-  AW White
-  AB Black

Beam Angle

-  15°
-  24°
-  38°
-  60°
- 
- 
- 
- 

TL-DL-3722

Light Distribution For 3000K

Medium 38°


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1407 | Ø0.71 |
| 2 | 351.7 | Ø1.43 |
| 3 | 156.3 | Ø2.15 |
| 4 | 87.92 | Ø2.86 |
| 5 | 56.27 | Ø3.58 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1121 | Ø1.10 |
| 2 | 280.3 | Ø2.21 |
| 3 | 124.6 | Ø3.31 |
| 4 | 70.09 | Ø4.41 |
| 5 | 44.85 | Ø5.51 |



Sketch

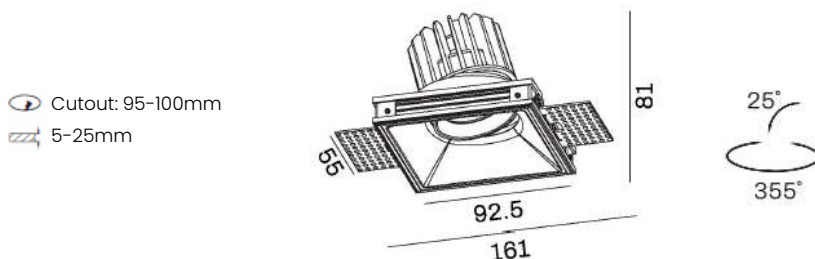

NEW Oris Square Trimless 90

Slim trim & deep fix design;
Low glare reflector;
Interchangeable reflectors with different beam angles;
Add-on glass diffuser or honeycomb louvre;
IP54;

TL-DL-373I




Light Source
10W 920lm, 250mA 36V, CRI>90, SDCM<2
LES09

Gear
This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 38° ☐ 60°
☒  ☒  ☒ IP54 ☒  D2W 6TW

Light Distribution For 3000K

Medium 38°

Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1407 | ø0.71 |
| 2 | 351.7 | ø1.43 |
| 3 | 156.3 | ø2.15 |
| 4 | 87.92 | ø2.86 |
| 5 | 56.27 | ø3.58 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1121 | ø1.10 |
| 2 | 280.3 | ø2.21 |
| 3 | 124.6 | ø3.31 |
| 4 | 70.09 | ø4.41 |
| 5 | 44.85 | ø5.51 |



Reflect


Reflect series downlights are a range of products more appear to hospitality areas. They are more decorative, with different finishing and color baffles. Of course the whole range of products are designed on low UGR bases.





Sketch

 Cutout: 28mm
 5-25mm



Cono 30

Deep recessed downlight with mirror reflector;
Ultra small cutout;
Very low UGR;

TL-DL-3511

Light Source

7W 480lm, 180mA 36V, CRI>90, SDCM<2
LES06

Gear

This product is supplied with LED driver.





Finishes

AW White
AB Black

Baffle Finishes

WH Plain White
BK Plain Black
CH Chrome

Beam Angle

22° 40°
   

Light Distribution For 3000K

Spot 16.5°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2645 | Ø0.29 |
| 2 | 661.2 | Ø0.58 |
| 3 | 293.9 | Ø0.87 |
| 4 | 165.3 | Ø1.16 |
| 5 | 105.8 | Ø1.45 |


Medium 33.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1985 | Ø0.35 |
| 2 | 496.3 | Ø0.70 |
| 3 | 220.6 | Ø1.06 |
| 4 | 124.1 | Ø1.41 |
| 5 | 79.41 | Ø1.77 |



Sketch

 Cutout: 28mm
 5-25mm



Hexo 30

Wall washer with mirror reflector;
Ultra small cutout;
Powerful spot;

TL-DL-3291

Light Source

6-8W 300lm, 150-200mA 36V, CRI>90,
SDCM<2
LES06, LES09

Gear

This product is supplied with LED driver.





Finishes

AW White
AB Black

Baffle Finishes

WH Plain White
BK Plain Black
CH Chrome

Beam Angle

56°
   



Light Distribution For 2700K


Wide 56°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 331.7 | Ø0.99 |
| 2 | 82.92 | Ø1.98 |
| 3 | 36.85 | Ø2.97 |
| 4 | 20.73 | Ø3.97 |
| 5 | 13.27 | Ø4.96 |



Sketch

 Cutout: 30mm
 5-25mm

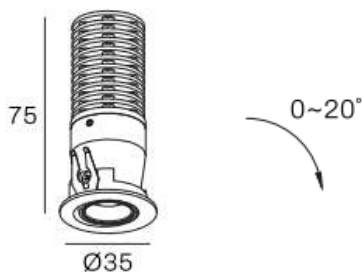

NEW Sara 30

Downlight for indoor use;
Anti-Glare design;
Mirror reflector;
20 degree tilt;

TL-DL-3514

Light Source

6W 258lm, 150mA 36V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Baffle Finishes

☐ WH Plain White
☒ BK Plain Black
☐ CH Chrome

Beam Angle

☐ 24° ☐ 36°
☒ III ☒ CE ☐ IP21



Light Distribution For 3000K


Medium 32°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1079 | Ø0.58 |
| 2 | 269.8 | Ø1.15 |
| 3 | 119.9 | Ø1.73 |
| 4 | 67.44 | Ø2.31 |
| 5 | 43.16 | Ø2.88 |



Sketch

 Cutout: 30mm
 5-25mm



Roby 50

Adjustable spots with mirror reflector;
360 degree rotate & 30 degree big tilt;
Compact body;
Low UGR;

TL-DL-3249

Light Source

6W 350lm, 150mA 36V, CRI>90, SDCM<2
LES04

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Baffle Finishes

☐ WH Plain White
☒ BK Plain Black
☐ CH Chrome

Beam Angle

☐ 22° ☐ 40°
☒ III ☒ CE ☐ IP21


Light Distribution For 2700K

Wide 40°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 515.6 | Ø0.57 |
| 2 | 128.9 | Ø1.14 |
| 3 | 57.29 | Ø1.71 |
| 4 | 32.22 | Ø2.28 |
| 5 | 20.62 | Ø2.85 |



Sketch

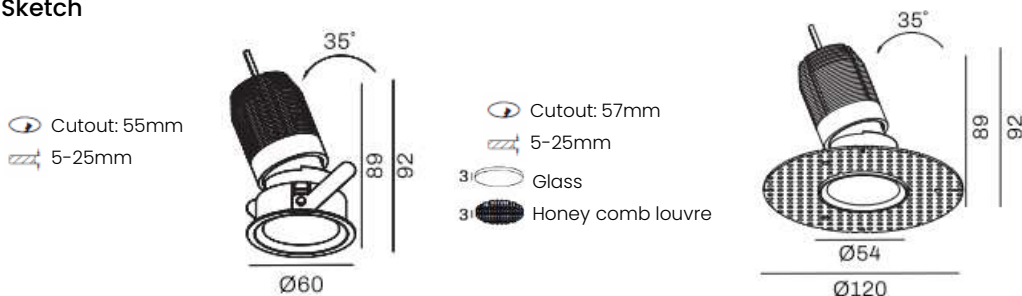

NEW Roby Curve 55

Ultra compact design;
Fix & Tilt 2in1;
Modulized;

TL-DL-3688

Light Source

10W 700lm, 250mA 36V, CRI>90, SDCM<3
LES03, LES04

Gear

This product is supplied with LED driver.

Finishes

- AW White
- AB Black

Baffle Finishes

- WH Plain White
- BK Plain Black
- CH Chrome
- BZ Brushed Bronze

Beam Angle

- 15°
- 24°
- 36°
- 50°

Light Distribution For 3000K

Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 5459 | Ø0.32 |
| 2 | 1365 | Ø0.64 |
| 3 | 606.6 | Ø0.96 |
| 4 | 341.2 | Ø1.28 |
| 5 | 218.4 | Ø1.60 |

Medium 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3684 | Ø0.42 |
| 2 | 921.0 | Ø0.84 |
| 3 | 409.0 | Ø1.26 |
| 4 | 230.2 | Ø1.68 |
| 5 | 147.4 | Ø2.10 |

Medium 36°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1429 | Ø0.66 |
| 2 | 357.4 | Ø1.33 |
| 3 | 158.8 | Ø1.99 |
| 4 | 89.34 | Ø2.66 |
| 5 | 57.18 | Ø3.33 |


Wide 50°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 638.5 | Ø1.13 |
| 2 | 159.6 | Ø2.26 |
| 3 | 70.90 | Ø3.39 |
| 4 | 39.90 | Ø4.53 |
| 5 | 25.50 | Ø5.66 |



Sketch

 Cutout: 55mm
 5-25mm



NEW Finlin 55

Fixed reflector spot;
Easy maintenance;
Very low UGR;

TL-DL-3400

Light Source

10W 680lm, 250mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.




Finishes

- AW** White
- AB** Black

Baffle Finishes



- WH** Plain White
- BK** Plain Black
- BR** Brass
- BZ** Brushed Bronze

Beam Angle

- 20° 36°
-   



Sketch

 Cutout: 115mm
 5-25mm



NEW Petite 120

Downlight for indoor use;
Slim trim design;
Very stylish design;
Up to 20watt;
IP21;

TL-DL-3735A

Light Source

15W 1200lm, 350mA 36V, 18W 500mA 36V,
CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Baffle Finishes

WH Plain White
BK Plain Black

Beam Angle

20° 36° 60°



Light Distribution For 3000K

Spot 15°



Wide 36°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 13332 | Ø0.22 |
| 2 | 3333 | Ø0.44 |
| 3 | 1481 | Ø0.65 |
| 4 | 833.2 | Ø0.87 |
| 5 | 533.3 | Ø1.09 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3380 | Ø0.61 |
| 2 | 845.0 | Ø1.21 |
| 3 | 375.6 | Ø1.81 |
| 4 | 211.3 | Ø2.42 |
| 5 | 135.2 | Ø3.02 |



Sketch

 Cutout: 115mm
 5-25mm



NEW Whaka 120

Downlight for indoor use;
Slim trim design;
Very stylish design;
Up to 20watt;
IP21;

TL-DL-3735B

Light Source

15W 1200lm, 350mA 36V, 18W 500mA 36V,
CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.





Finishes

AW White
AB Black

Baffle Finishes

WH Plain White
BK Plain Black

Beam Angle

36° 60°
   

Light Distribution For 3000K

Spot 15°



Wide 36°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 13332 | Ø0.22 |
| 2 | 3333 | Ø0.44 |
| 3 | 1481 | Ø0.65 |
| 4 | 833.2 | Ø0.87 |
| 5 | 533.3 | Ø1.09 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3380 | Ø0.61 |
| 2 | 845.0 | Ø1.21 |
| 3 | 375.6 | Ø1.81 |
| 4 | 211.3 | Ø2.42 |
| 5 | 135.2 | Ø3.02 |



Sketch

 Cutout: 115mm
 5-25mm



NEW Mirbi 120

Downlight for indoor use;
Slim trim design;
Very stylish design;
Up to 20watt;
IP21;

TL-DL-3735C

Light Source

15W 1200lm, 350mA 36V, 18W 500mA 36V,
CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Baffle Finishes

WH Plain White
BK Plain Black

Beam Angle

24° 36° 60°



Light Distribution For 3000K

Medium 23.8°


Wide 32.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 13332 | Ø0.22 |
| 2 | 3333 | Ø0.44 |
| 3 | 1481 | Ø0.65 |
| 4 | 833.2 | Ø0.87 |
| 5 | 533.3 | Ø1.09 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3380 | Ø0.61 |
| 2 | 845.0 | Ø1.21 |
| 3 | 375.6 | Ø1.81 |
| 4 | 211.3 | Ø2.42 |
| 5 | 135.2 | Ø3.02 |



Sketch

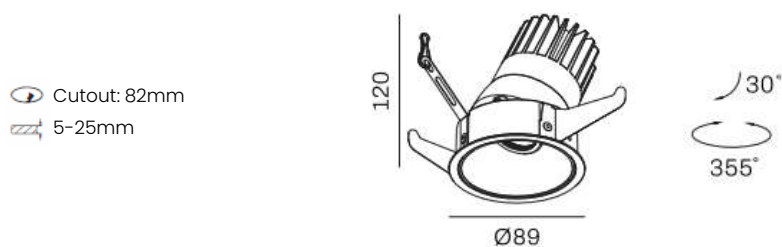

Mirbi 82

Fix & tilt combined design;
355 degree rotate & 30 degree big tilt;
Even beam;
Very low UGR;

TL-DL-3196

Light Source

13W 800lm, 350mA 3IV, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre;
Glass diffuser (IP44)

Finishes

- AW** White
- AB** Black

Baffle Finishes

- WH** Plain White
- BK** Plain Black
- CH** Chrome

Beam Angle

- 17°
- 24°
- 36°
- III
- CE
- IP21
- D2W 6TW

Light Distribution For 3000K

Medium 23.8°


Wide 32.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3772 | Ø0.42 |
| 2 | 943.0 | Ø0.84 |
| 3 | 419.1 | Ø1.26 |
| 4 | 235.8 | Ø1.69 |
| 5 | 150.9 | Ø2.11 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2628 | Ø0.58 |
| 2 | 657.1 | Ø1.16 |
| 3 | 292.0 | Ø1.74 |
| 4 | 164.3 | Ø2.31 |
| 5 | 105.1 | Ø2.89 |



Sketch

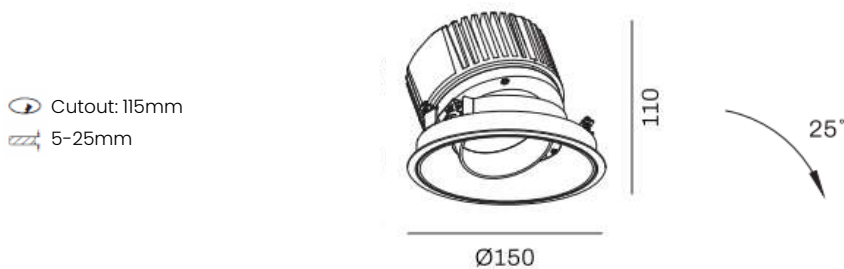

Mirbi 140

Big commercial downlight;
355 degree rotate & 30 degree big tilt;
Even beam curve;
Very low UGR;

TL-DL-3564

Light Source

30W 2650lm, 700mA 36V, CRI>90, SDCM<2
LES013

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

- AW** White
- AB** Black

Baffle Finishes

- WH** Plain White
- BK** Plain Black
- CH** Chrome
- BN** Brushed Nickel

Beam Angle

- 15°
- 24°
- 36°
- 50°

Light Distribution For 3000K

Medium 40°

Wide 50.5°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3757 | Ø0.74 |
| 2 | 939.3 | Ø1.47 |
| 3 | 417.5 | Ø2.21 |
| 4 | 234.8 | Ø2.95 |
| 5 | 150.3 | Ø3.69 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2421 | Ø0.95 |
| 2 | 605.3 | Ø1.90 |
| 3 | 269.0 | Ø2.86 |
| 4 | 151.3 | Ø3.81 |
| 5 | 96.85 | Ø4.77 |



Sketch

Cutout: 70mm
 5-25mm

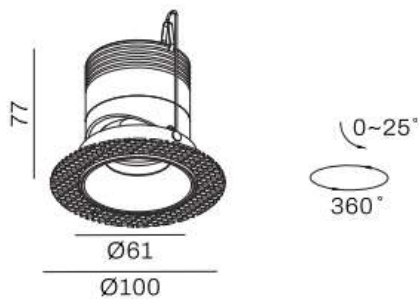

NEW Mirbi Trimless 60

Deep recessed & trimless;
 Adjustable design;
 Baffle can be changed;

TL-DL-3663

Light Source

10W 924lm, 250mA 36V, CRI>90, SDCM<2
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Baffle Finishes

WH Plain White
BK Plain Black
BR Brushed Brass
BZ Brushed Bronze

Beam Angle

24° 36° 60°

Light Distribution For 3000K

Spot 15°


Medium 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 7485 | Ø0.26 |
| 2 | 1871 | Ø0.51 |
| 3 | 831.7 | Ø0.77 |
| 4 | 467.8 | Ø1.02 |
| 5 | 299.4 | Ø1.28 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 4040 | Ø0.47 |
| 2 | 1010 | Ø0.94 |
| 3 | 448.9 | Ø1.40 |
| 4 | 252.5 | Ø1.87 |
| 5 | 161.6 | Ø2.34 |



Sketch

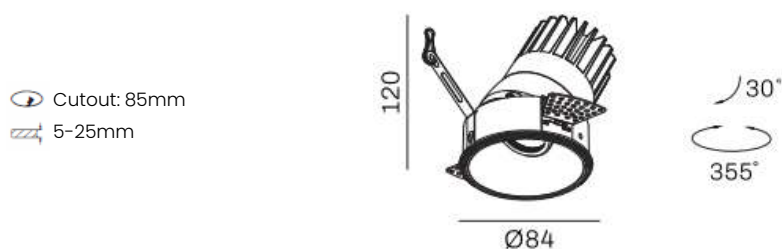

Mirbi Trimless 82

Fix & tilt combined design;
Trimless;
355 degree rotate & 30 degree big tilt;
Even beam;
Very low UGR;

TL-DL-3197

Light Source

13W 800lm, 350mA 3IV, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre;
Glass diffuser (IP44)

Finishes

- AW** White
- AB** Black

Baffle Finishes

- WH** Plain White
- BK** Plain Black
- CH** Chrome

Beam Angle

- 17°
- 24°
- 36°
- CE
- IP21
- D2W 6TW

Light Distribution For 3000K

Spot 19°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 4896 | Ø0.33 |
| 2 | 1224 | Ø0.67 |
| 3 | 544.0 | Ø1.01 |
| 4 | 306.0 | Ø1.35 |
| 5 | 195.9 | Ø1.69 |

Medium 23°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3660 | Ø0.41 |
| 2 | 915.1 | Ø0.82 |
| 3 | 406.7 | Ø1.23 |
| 4 | 228.8 | Ø1.65 |
| 5 | 146.4 | Ø2.06 |

Wide 33°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2665 | Ø0.60 |
| 2 | 666.2 | Ø1.20 |
| 3 | 296.1 | Ø1.80 |
| 4 | 166.6 | Ø2.40 |
| 5 | 106.6 | Ø3.00 |



Blackhole


The mentioned products are widely used in hospitality areas as well as private spaces.





Sketch

 Cutout: 38mm
 5-25mm



Odrey 40

Mini design in 5watt;
Low UGR;
IP44;

TL-DL-3297

Light Source

6W 300lm, 150mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°



Light Distribution For 3000K

Spot 15°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1972 | Ø0.27 |
| 2 | 492.9 | Ø0.54 |
| 3 | 219.1 | Ø0.82 |
| 4 | 123.2 | Ø1.09 |
| 5 | 78.87 | Ø1.36 |

Medium 20°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1985 | Ø0.35 |
| 2 | 496.3 | Ø0.70 |
| 3 | 220.6 | Ø1.06 |
| 4 | 124.1 | Ø1.41 |
| 5 | 79.41 | Ø1.77 |


Wide 36°
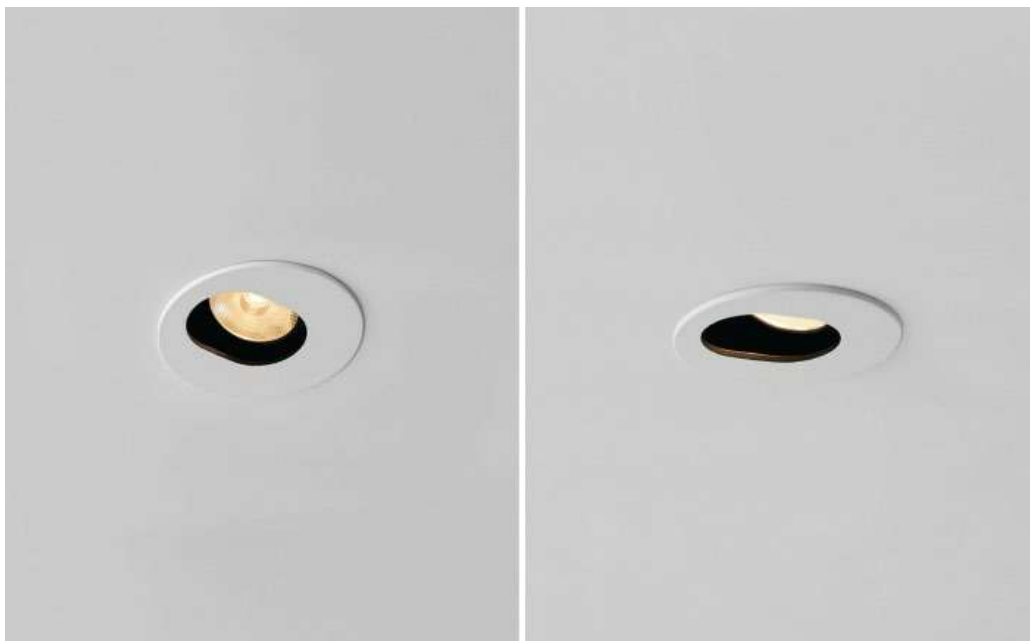
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 835.0 | Ø0.63 |
| 2 | 208.7 | Ø1.27 |
| 3 | 92.77 | Ø1.91 |
| 4 | 52.19 | Ø2.55 |
| 5 | 33.40 | Ø3.19 |



Sketch

 Cutout: 47mm
 5-25mm

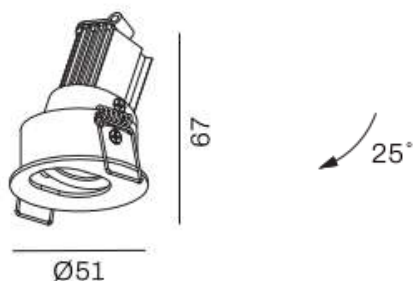

Lito 50

Mini keyhole washer;
25° tilt;

TL-DL-3296

Light Source

5W 300lm, 500mA 9V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
  

Light Distribution For 3000K

Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1972 | Ø0.27 |
| 2 | 492.9 | Ø0.54 |
| 3 | 219.1 | Ø0.82 |
| 4 | 123.2 | Ø1.09 |
| 5 | 78.87 | Ø1.36 |

Medium 20°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1985 | Ø0.35 |
| 2 | 496.3 | Ø0.70 |
| 3 | 220.6 | Ø1.06 |
| 4 | 124.1 | Ø1.41 |
| 5 | 79.41 | Ø1.77 |

Wide 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 835.0 | Ø0.63 |
| 2 | 208.7 | Ø1.27 |
| 3 | 92.77 | Ø1.91 |
| 4 | 52.19 | Ø2.55 |
| 5 | 33.40 | Ø3.19 |



Sketch

 Cutout: 31mm
 5-25mm



NEW Romor 30

Deep recessed;
Very low UGR;
IP44;

TL-DL-3674

Light Source

3W 166lm, 700mA 3V, CRI>90, SDCM<3
High power LED




Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

12° 20° 36°
  

Light Distribution For 3000K

Medium 24°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 925.7 | Ø0.41 |
| 2 | 231.4 | Ø0.82 |
| 3 | 102.9 | Ø1.23 |
| 4 | 57.85 | Ø1.64 |
| 5 | 37.03 | Ø2.05 |

Wide 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 429.7 | Ø0.58 |
| 2 | 107.4 | Ø1.17 |
| 3 | 47.74 | Ø1.75 |
| 4 | 26.85 | Ø2.34 |
| 5 | 17.19 | Ø2.92 |



Sketch

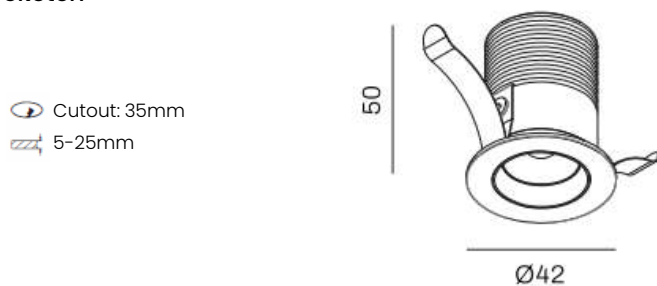

Finlin 30

Deep recessed;
Very low UGR;
IP44;

TL-DL-3357

Light Source

6W 280lm, 150mA 36V, CRI>90, SDCM<3
LES03, LES04

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

20° 40°
III CE IP21

Light Distribution For 3000K

Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1972 | Ø0.27 |
| 2 | 492.9 | Ø0.54 |
| 3 | 219.1 | Ø0.82 |
| 4 | 123.2 | Ø1.09 |
| 5 | 78.87 | Ø1.36 |

Medium 20°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1985 | Ø0.35 |
| 2 | 496.3 | Ø0.70 |
| 3 | 220.6 | Ø1.06 |
| 4 | 124.1 | Ø1.41 |
| 5 | 79.41 | Ø1.77 |


Wide 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 835.0 | Ø0.63 |
| 2 | 208.7 | Ø1.27 |
| 3 | 92.77 | Ø1.91 |
| 4 | 52.19 | Ø2.55 |
| 5 | 33.40 | Ø3.19 |



Sketch

 Cutout: 40mm
 5-25mm

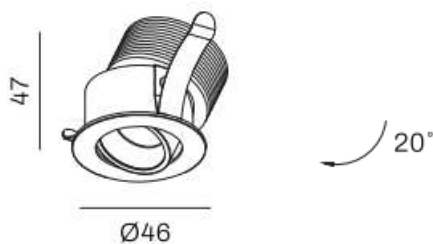

Roby 40

Compact size;
20 degree tilt;
Compacted size;

TL-DL-3358

Light Source

6W 230lm, 150mA 36V, CRI>90, SDCM<3
LES03




Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

20°
  



Light Distribution For 2700K


Spot 20.4°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1494 | Ø0.36 |
| 2 | 373.5 | Ø0.72 |
| 3 | 166.0 | Ø1.08 |
| 4 | 93.38 | Ø1.44 |
| 5 | 59.76 | Ø1.80 |



Sketch

 Cutout: 40mm
 5-25mm



NEW Roby AC 38

Low-glare;
20 degree tilt;
Downlight for indoor use;

TL-DL-3703

Light Source

5W 150lm, 230V, CRI>90, SDCM<3
LES06




Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

20° **40°**
  



Light Distribution For 3000K


Medium 25.7°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 720.0 | Ø0.46 |
| 2 | 180.0 | Ø0.91 |
| 3 | 80.00 | Ø1.37 |
| 4 | 45.00 | Ø1.83 |
| 5 | 28.80 | Ø2.28 |



Sketch

 Cutout: 60mm
 5-25mm

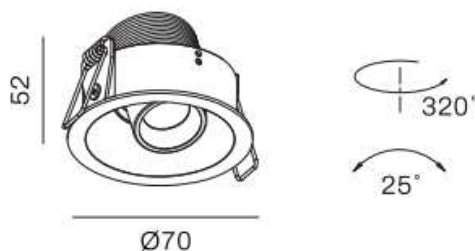

Domino 60

Compact snoot;
Unique black ring;
Low UGR;

TL-DL-3526

Light Source

6W 260lm, 150mA 36V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 20°
☒ 25°
☐ 30°
☐ 36°
☐ 42°
☐ 48°
☐ 54°
☐ 60°
☐ 66°
☐ 72°
☐ 78°
☐ 84°
☐ 90°



Light Distribution For 3000K


Wide 38.8°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 502.5 | ø0.70 |
| 2 | 125.6 | ø1.41 |
| 3 | 55.83 | ø2.11 |
| 4 | 31.40 | ø2.82 |
| 5 | 20.10 | ø3.53 |



Sketch

 Cutout: 65mm
 5-25mm



Mick 65

Powerful spot;
Simple & handy;
Low glare;

TL-DL-3061

Light Source

10W 800lm, 250mA 36V, CRI>90, SDCM<2
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black


Beam Angle

15° 24° 36° 50°
III CE IP21 D2W 6TW



Light Distribution For 3000K


Wide 32°
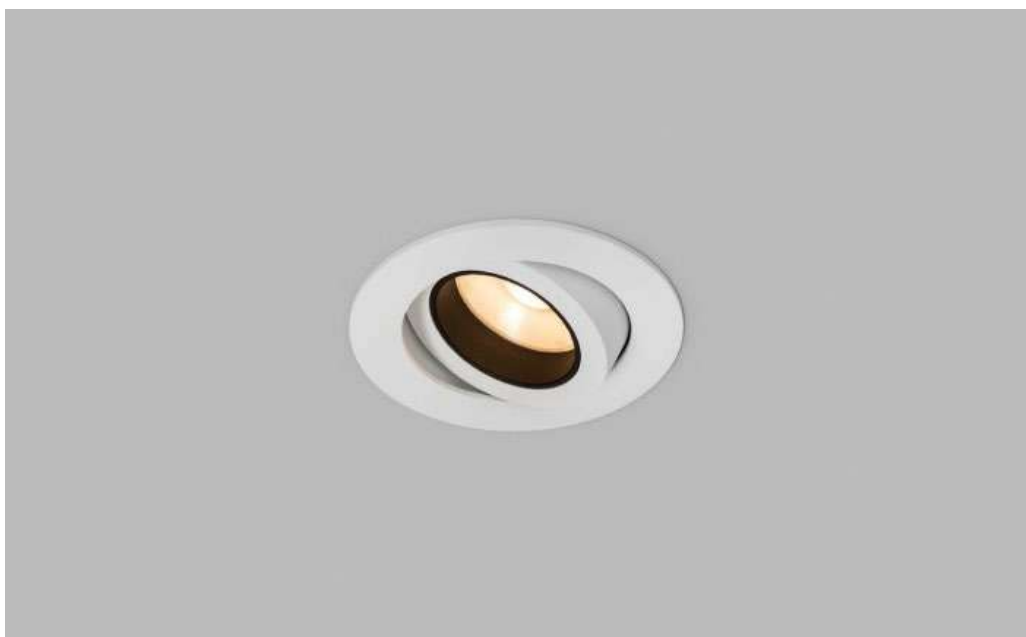
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 982.3 | Ø0.57 |
| 2 | 245.6 | Ø1.15 |
| 3 | 109.1 | Ø1.73 |
| 4 | 61.39 | Ø2.30 |
| 5 | 39.29 | Ø2.88 |



Sketch

 Cutout: 75mm
 5-25mm

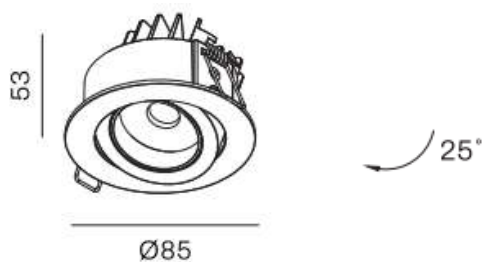

Mirbi 75

Black ring tilt;
25 degree tilt angle;
Low UGR;

TL-DL-3060

Light Source

10W 800lm, 250mA 36V, CRI>90, SDCM<2
LES06, LES09





Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36° 50°
   



Light Distribution For 3000K

Wide 32.6°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 990.7 | Ø0.58 |
| 2 | 247.7 | Ø1.17 |
| 3 | 110.1 | Ø1.76 |
| 4 | 61.92 | Ø2.34 |
| 5 | 39.63 | Ø2.93 |



Sketch

 Cutout: 82mm
 5-25mm



Dinor 82

Slim trim;
 Black snout design;
 Very low UGR;

TL-DL-3382

Light Source

10W 650lm, 250mA 36V, CRI>90, SDCM<2
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36° ☐ 50°
☒ III ☒ CE ☒ IP21 ☒ D2W 6TW



Light Distribution For 3000K


Wide 38°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1875 | ø0.69 |
| 2 | 468.8 | ø1.37 |
| 3 | 208.4 | ø2.06 |
| 4 | 117.2 | ø2.75 |
| 5 | 75.01 | ø3.44 |



Sketch

 Cutout: 90mm
 5-25mm

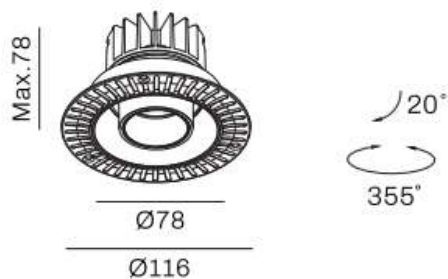

Dinor Trimless 82

Trimless design;
Black snoot;
Very low UGR;

TL-DL-3546

Light Source

10W 650lm, 250mA 36V, CRI>90, SDCM<2
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36° ☐ 50°
☒ III ☒ CE ☒ IP21 ☒ D2W 6TW



Light Distribution For 3000K


Wide 38°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1875 | Ø0.69 |
| 2 | 468.8 | Ø1.37 |
| 3 | 208.4 | Ø2.06 |
| 4 | 117.2 | Ø2.75 |
| 5 | 75.01 | Ø3.44 |



Sketch

 Cutout: 82mm
 5-25mm

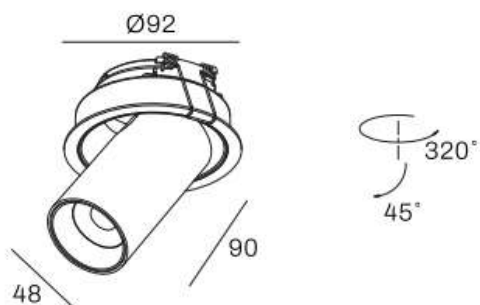

Wetrot 82

Slim trim;
Semi recessed adjustable spot;
Low glare;

TL-DL-3562

Light Source

8W 650lm, 200mA 36V, CRI>90, SDCM<2
LES06

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36°





Light Distribution For 3000K


Wide 40.5°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1247 | ø0.74 |
| 2 | 311.6 | ø1.48 |
| 3 | 138.5 | ø2.21 |
| 4 | 77.91 | ø2.95 |
| 5 | 49.86 | ø3.69 |



Sketch

 Cutout: 82mm
 5-25mm



Wetru Trimless 82

Trimless design;
Semi recessed adjustable spot;
Low UGR;

TL-DL-3593

Light Source

8W 650lm, 200mA 36V, CRI>90, SDCM<2
LES06

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36°



Light Distribution For 3000K

Wide 40.5°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1247 | Ø0.74 |
| 2 | 311.6 | Ø1.48 |
| 3 | 138.5 | Ø2.21 |
| 4 | 77.91 | Ø2.95 |
| 5 | 49.86 | Ø3.69 |



Scania


Scania is a range of products designed for Scandinavia market. With a shallow void range, you can almost install the fitting wherever you want, and don't need to think too much about the space in the ceiling. Of course from design language point of view, Scania is a good representative of simplicity and functionality.





Sketch

 Cutout: 83mm
 5-25mm



Mick 82

Fixed slim trim;
Step in design;
IP54;

TL-DL-3041

Light Source

10W 1100lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°



Light Distribution For 3000K

Medium 36°



Wide 47°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1218 | Ø0.65 |
| 2 | 304.6 | Ø1.30 |
| 3 | 135.4 | Ø1.95 |
| 4 | 76.15 | Ø2.60 |
| 5 | 48.74 | Ø3.25 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1399 | Ø0.86 |
| 2 | 349.7 | Ø1.73 |
| 3 | 155.4 | Ø2.60 |
| 4 | 78.44 | Ø3.47 |
| 5 | 55.96 | Ø4.34 |



Sketch

 Cutout: 85x85mm
 5-25mm



Mick Square 85

Fixed square slim trim;
Step in design;
IP54;

TL-DL-3042

Light Source

10W 1100lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°



Light Distribution For 3000K

Medium 36°



Wide 47°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1218 | ø0.65 |
| 2 | 304.6 | ø1.30 |
| 3 | 135.4 | ø1.95 |
| 4 | 76.15 | ø2.60 |
| 5 | 48.74 | ø3.25 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1399 | ø0.86 |
| 2 | 349.7 | ø1.73 |
| 3 | 155.4 | ø2.60 |
| 4 | 78.44 | ø3.47 |
| 5 | 55.96 | ø4.34 |



Sketch

 Cutout: 160x85mm
 5-25mm

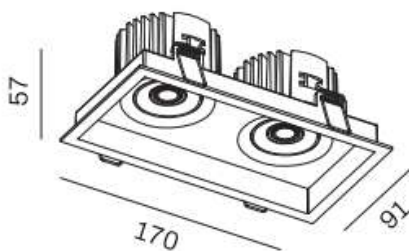

Mick Rectangle 160

Fixed square slim trim;
Step in design;
IP54;

TL-DL-3043

Light Source

2x10W 2200lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°



Light Distribution For 3000K

Medium 20°



Wide 36°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2906 | ø0.63 |
| 2 | 726.6 | ø1.28 |
| 3 | 322.9 | ø1.93 |
| 4 | 181.6 | ø2.57 |
| 5 | 116.3 | ø3.22 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1892 | ø0.95 |
| 2 | 427.9 | ø1.90 |
| 3 | 210.2 | ø2.86 |
| 4 | 118.2 | ø3.81 |
| 5 | 75.60 | ø4.76 |



Sketch

 Cutout: 82mm
 5-25mm



Ruvi 82

Compact body;
Gimble tilt 25 degree;
UGR<19;

TL-DL-3090

Light Source

9W 700lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°




Light Distribution For 3000K

Wide 46°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 971.4 | Ø0.85 |
| 2 | 242.8 | Ø1.70 |
| 3 | 107.9 | Ø2.55 |
| 4 | 60.71 | Ø3.40 |
| 5 | 38.85 | Ø4.25 |



Sketch

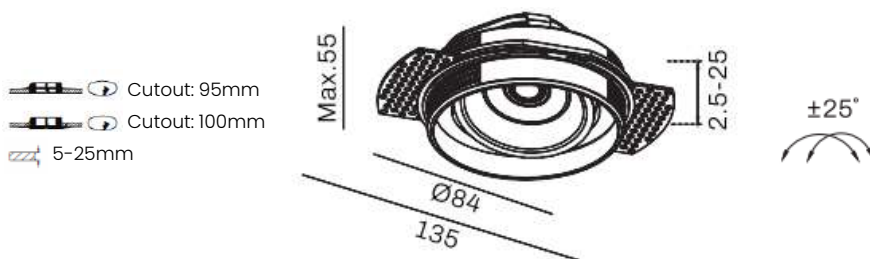

Ruvi Trimless 82

Step in trimless downlight;
Gimble tilt 25 degree;
UGR<19;

TL-DL-3545

Light Source

9W 700lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°





Light Distribution For 3000K



Wide 37.8°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1052 | ø0.68 |
| 2 | 262.9 | ø1.37 |
| 3 | 116.9 | ø2.06 |
| 4 | 65.74 | ø2.74 |
| 5 | 42.07 | ø3.43 |



Sketch

 Cutout: 82mm
 5-25mm



Ruvi Deep 82

Step in slim trim downlight;
Gimble tilt 25 degree;
UGR<19;

TL-DL-3417

Light Source

9W 700lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°





Light Distribution For 3000K


Wide 37.8°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1052 | Ø0.68 |
| 2 | 262.9 | Ø1.37 |
| 3 | 116.9 | Ø2.06 |
| 4 | 65.74 | Ø2.74 |
| 5 | 42.07 | Ø3.43 |



Sketch

 Cutout: 90x90mm
 5-25mm

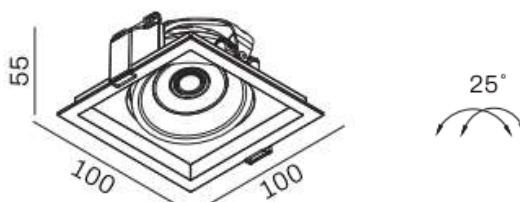

Ruvi Square 90

Step in square downlight;
Gimble tilt 25 degree;
UGR<19;

TL-DL-3166

Light Source

9W 450lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°



Light Distribution For 3000K

Medium 36°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 955.6 | ø0.81 |
| 2 | 238.9 | ø1.62 |
| 3 | 106.2 | ø2.43 |
| 4 | 59.73 | ø3.24 |
| 5 | 38.23 | ø4.06 |


Wide 44°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 738.7 | ø0.83 |
| 2 | 184.7 | ø1.67 |
| 3 | 82.02 | ø2.51 |
| 4 | 46.17 | ø3.34 |
| 5 | 29.55 | ø4.17 |



Sketch

 Cutout: 90x90mm
 5-25mm

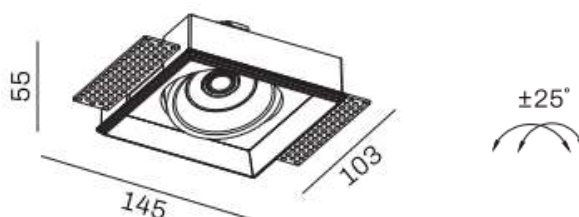

Ruvi Square Trimless 100

Step in square trimless downlight;
Gimble tilt 25 degree;
UGR<19;

TL-DL-3163

Light Source

9W 450lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°



Light Distribution For 3000K

Medium 36°



Wide 44°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 955.6 | ø0.81 |
| 2 | 238.9 | ø1.62 |
| 3 | 106.2 | ø2.43 |
| 4 | 59.73 | ø3.24 |
| 5 | 38.23 | ø4.06 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 738.7 | ø0.83 |
| 2 | 184.7 | ø1.67 |
| 3 | 82.02 | ø2.51 |
| 4 | 46.17 | ø3.34 |
| 5 | 29.55 | ø4.17 |



Sketch

 Cutout: 90x175mm
 5-25mm

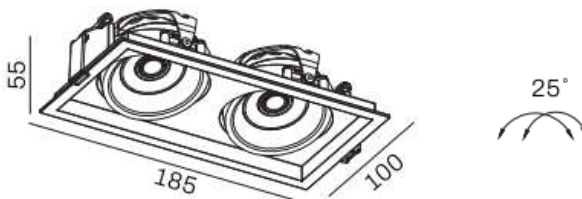

Ruvi Rectangle 175

Step in twin square downlight;
Gimble tilt 25 degree;
UGR<19;

TL-DL-3167

Light Source

2x9W 900lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°



Light Distribution For 3000K

Medium 36°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 955.6 | ø0.81 |
| 2 | 238.9 | ø1.62 |
| 3 | 106.2 | ø2.43 |
| 4 | 59.73 | ø3.24 |
| 5 | 38.23 | ø4.06 |

Wide 44°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 738.7 | ø0.83 |
| 2 | 184.7 | ø1.67 |
| 3 | 82.02 | ø2.51 |
| 4 | 46.17 | ø3.34 |
| 5 | 29.55 | ø4.17 |



Sketch

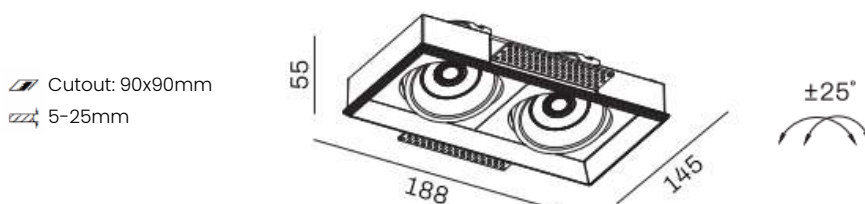

Ruvi Rectangle Trimless 190

Step in square trimless downlight;
Gimble tilt 25 degree;
UGR<19;

TL-DL-3165

Light Source

9W 900lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°



Light Distribution For 3000K

Medium 36°



Wide 44°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 955.6 | ø0.81 |
| 2 | 238.9 | ø1.62 |
| 3 | 106.2 | ø2.43 |
| 4 | 59.73 | ø3.24 |
| 5 | 38.23 | ø4.06 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 738.7 | ø0.83 |
| 2 | 184.7 | ø1.67 |
| 3 | 82.02 | ø2.51 |
| 4 | 46.17 | ø3.34 |
| 5 | 29.55 | ø4.17 |



Sketch

 Cutout: 75-83mm
 5-25mm

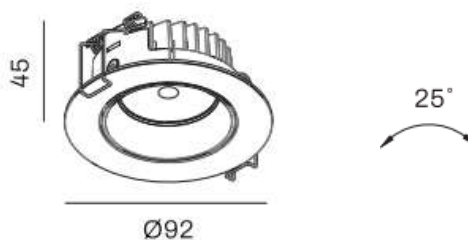

Ray 82

Simply tilt;
Wide cutout from 75-83mm;
IP54;

TL-DL-3416

Light Source

10W 500lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle


☐ 24° ☐ 36° ☐ 45°






Light Distribution For 3000K


Wide 37°
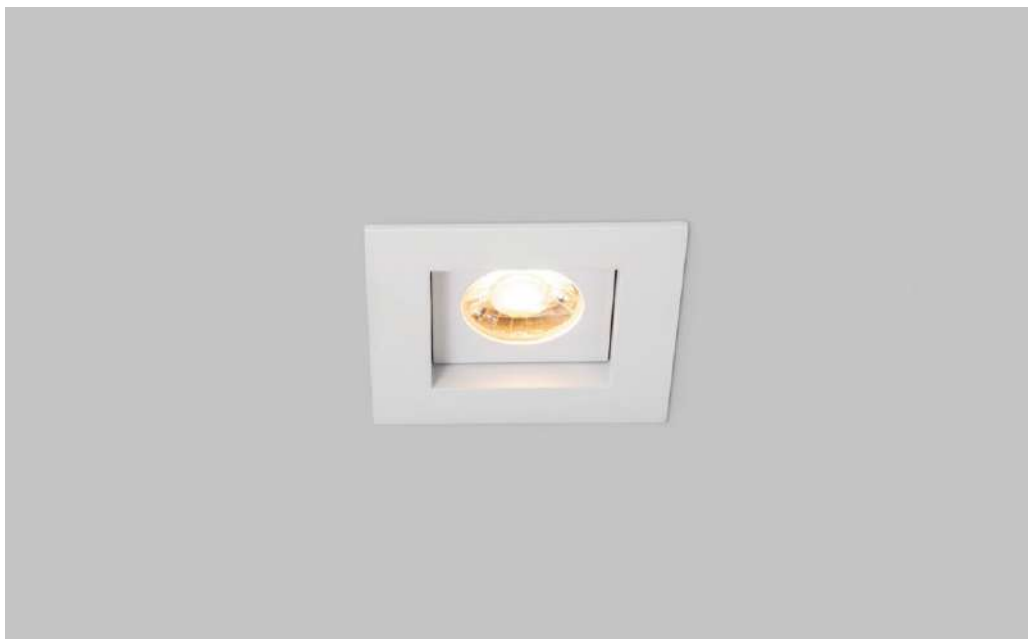
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 990.6 | Ø0.67 |
| 2 | 247.7 | Ø1.34 |
| 3 | 110.1 | Ø2.01 |
| 4 | 61.91 | Ø2.69 |
| 5 | 39.62 | Ø3.36 |



Sketch

-  Cutout: 75-83mm
-  Cutout: 91mm
-  5-25mm

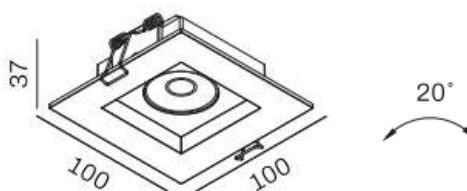

Ray Square 90

Step in square downlight;
Round cutout available;
UGR<19;

TL-DL-3347

Light Source

9W 550lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

-  White
-  Black

Beam Angle

-  24°
-  36°
-  45°




Light Distribution For 2700K

Wide 46°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 971.4 | ø0.85 |
| 2 | 242.8 | ø1.70 |
| 3 | 107.9 | ø2.55 |
| 4 | 60.71 | ø3.40 |
| 5 | 38.85 | ø4.25 |



Cave

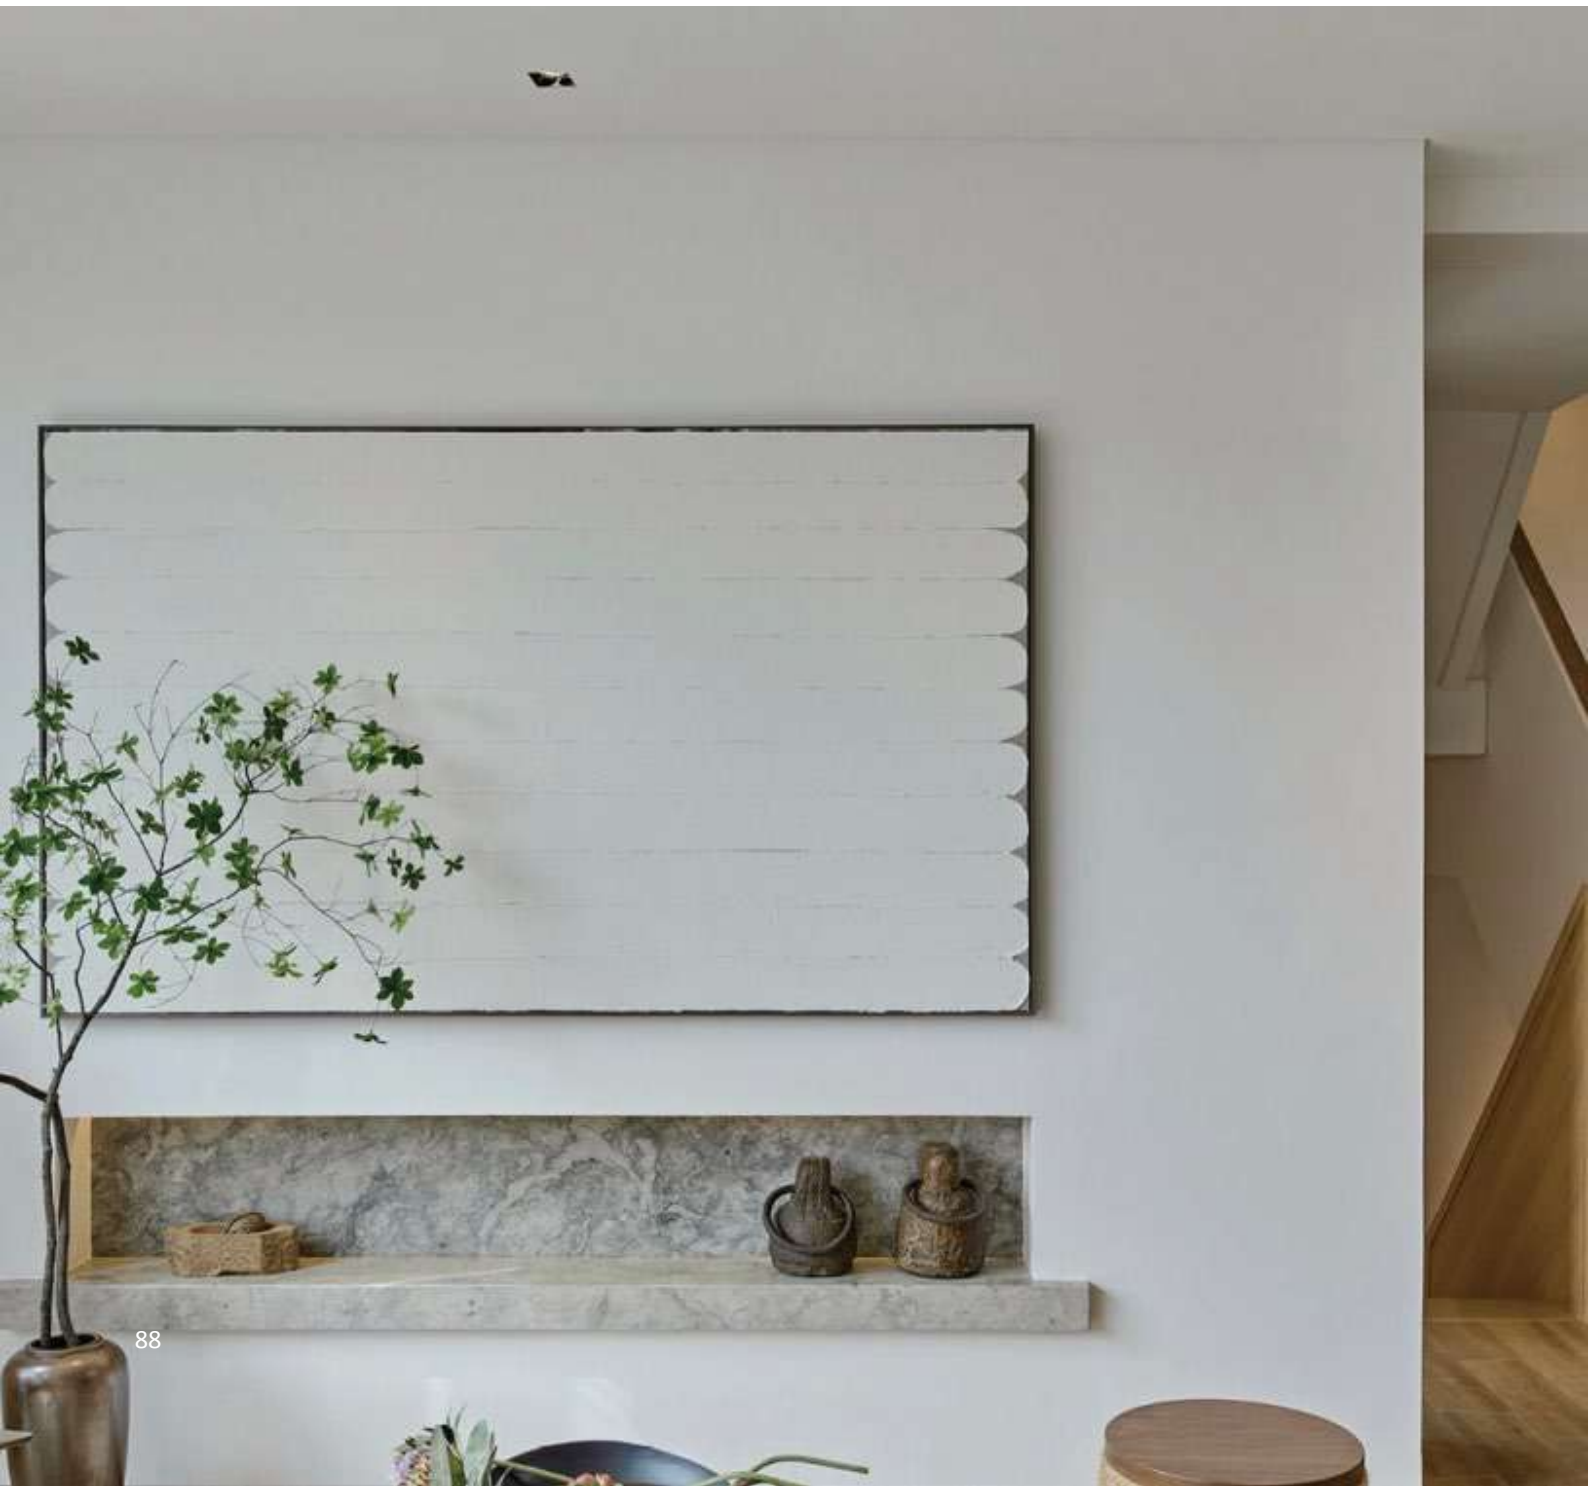
Cave series are unique, as we are trying to integrate the fitting into the ceiling, like a cave deeply built.





Sketch

 Cutout: 75-83mm
 5-25mm



Mirbi Square 62

Deep built downlight;
360 degree rotate & 25 degree tilt;
Easy maintenance;

TL-DL-3210

Light Source

8W 500lm, 200mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36°
☒ III ☒ CE ☒ IP21




Light Distribution For 3000K


Wide 37°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 959.9 | ø0.66 |
| 2 | 239.8 | ø1.33 |
| 3 | 106.6 | ø2.00 |
| 4 | 59.95 | ø2.66 |
| 5 | 38.37 | ø3.33 |



Sketch

-  Cutout: 62x62mm
-  Cutout: 65x62mm
-  5-25mm

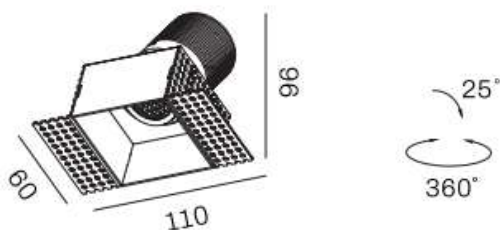

Mirbi Square Trimless 62

Deep built downlight;
Trimless;
360 degree rotate & 25 degree tilt;
Easy maintenance;

TL-DL-3212

Light Source

8W 500lm, 200mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

- ☐ AW White
- ☒ AB Black

Beam Angle



- ☐ 15°
- ☐ 24°
- ☐ 36°
- ☒ III
- ☒ CE
- ☒ IP21


Light Distribution For 3000K Wide 37°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 959.8 | ø0.66 |
| 2 | 239.8 | ø1.33 |
| 3 | 106.6 | ø2.00 |
| 4 | 59.95 | ø2.66 |
| 5 | 38.37 | ø3.33 |



Sketch

 Cutout: 120x62mm
 5-25mm

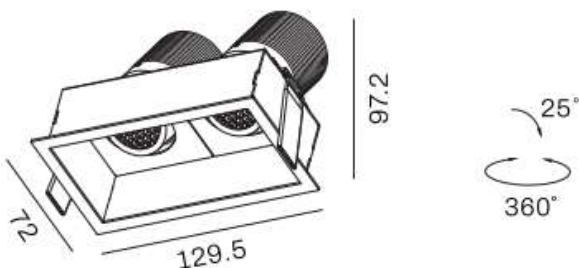

Mirbi Rectangle 120

Deep built downlight;
360 degree rotate & 25 degree tilt;
Easy maintenance;

TL-DL-3211

Light Source

2x8W 1000lm, 200mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36°
☒ III ☒ CE ☐ IP21




Light Distribution For 3000K


Wide 37°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1835 | ø0.65 |
| 2 | 458.9 | ø1.31 |
| 3 | 203.9 | ø1.96 |
| 4 | 114.7 | ø2.26 |
| 5 | 73.42 | ø3.27 |



Sketch

-  Cutout: 62x120mm
-  Cutout: 65x122mm
-  5-25mm

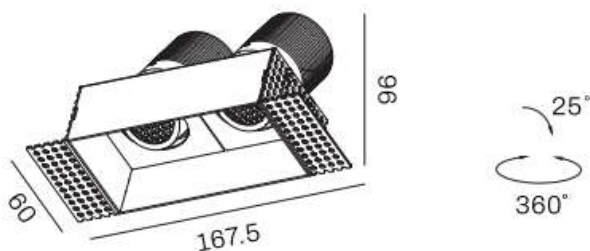

Mirbi Rectangle Trimless 120

Deep built downlight;
Trimless;
360 degree rotate & 25 degree tilt;
Easy maintenance;

TL-DL-3213

Light Source

2x8W 1000lm, 200mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.


Accessories

Honeycomb louvre

Finishes

-  White
-  Black

Beam Angle

-  15°
-  24°
-  36°
- 
- 
- 



Light Distribution For 3000K


Wide 37°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1835 | ø0.65 |
| 2 | 458.9 | ø1.31 |
| 3 | 203.9 | ø1.96 |
| 4 | 114.7 | ø2.26 |
| 5 | 73.42 | ø3.27 |



Sketch

 Cutout: 65mm
 5-25mm



NEW Mick 65

Low UGR design;
Interchangeable modules;
IP54 waterproof;

TL-DL-3209

Light Source

8W 500lm, 200mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
  



Light Distribution For 3000K


Wide 37°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 953.3 | Ø0.66 |
| 2 | 239.3 | Ø1.33 |
| 3 | 106.6 | Ø2.00 |
| 4 | 59.95 | Ø2.66 |
| 5 | 38.37 | Ø3.33 |



Sketch

 Cutout: 65mm
 5-25mm



NEW Mick Trimless 65

Low UGR design;
Interchangeable modules;
IP54 waterproof;

TL-DL-3214

Light Source

8W 500lm, 200mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.




Accessories

Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
  

Light Distribution For 3000K


Wide 37°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 959.3 | Ø0.66 |
| 2 | 239.8 | Ø1.33 |
| 3 | 106.6 | Ø2.00 |
| 4 | 59.95 | Ø2.66 |
| 5 | 38.37 | Ø3.33 |

Cube

Cube series are LED lighting to replace the traditional grilled downlights, we have mini standard and jumbo 3 different sizes, suitable to use in various commercial areas.



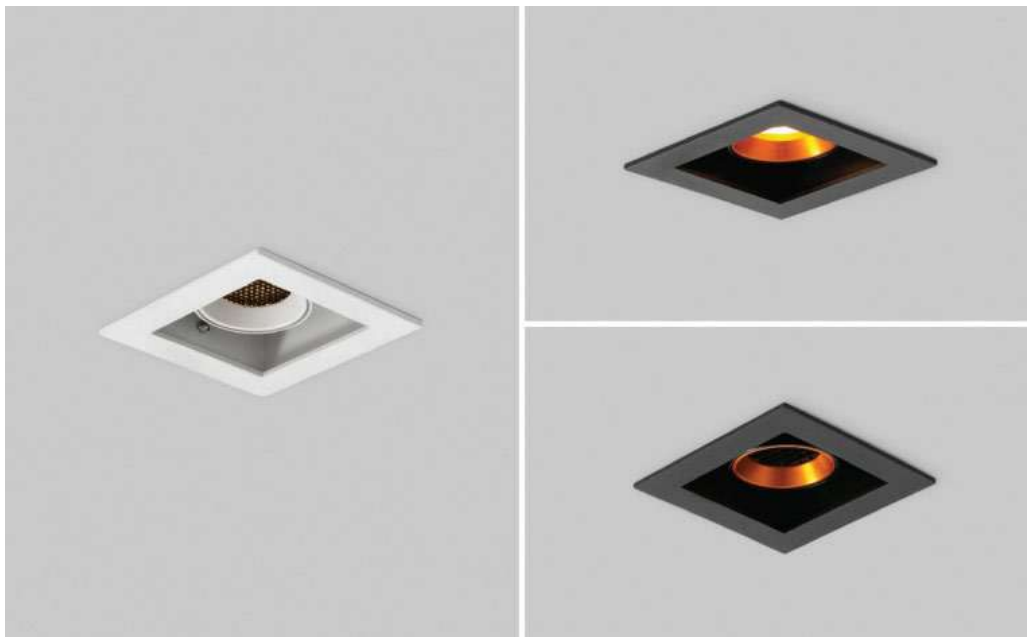

Sketch

Cutout: 5x55mm
 5-25mm



Reto 55

Single square gridded downlight;
355 degree rotate & 20 degree tilt;
interchangeable baffle;

TL-DL-3444

Light Source

6W 300lm, 150mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

AW White

AB Black

Baffle Finishes

WH Plain White

BK Plain Black

BB Brushed Brass

Beam Angle

15° 24° 36°

Light Distribution For 3000K

Spot 24°

| h(m) | E(lx) | ø(m) |
|------|--------|-------|
| 1 | 1021 | ø0.18 |
| 2 | 255.4 | ø0.36 |
| 3 | 113.52 | ø0.54 |
| 4 | 63.84 | ø0.72 |
| 5 | 40.88 | ø0.91 |

Medium 36°



| h(m) | E(lx) | ø(m) |
|------|--------|-------|
| 1 | 587.2 | ø0.25 |
| 2 | 146.84 | ø0.51 |
| 3 | 65.28 | ø0.76 |
| 4 | 36.72 | ø1.02 |
| 5 | 23.48 | ø1.27 |


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 388.9 | ø0.38 |
| 2 | 97.24 | ø0.76 |
| 3 | 43.2 | ø1.15 |
| 4 | 23.31 | ø1.53 |
| 5 | 15.56 | ø2.88 |



Sketch

 Cutout: 94x55mm
 5-25mm



Reto 95

Twin square spots;
355 degree rotate & 20 degree tilt;
interchangeable baffle;

TL-DL-3445

Light Source

2x6W 600lm, 150mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

AW White

AB Black

Baffle Finishes

WH Plain White

BK Plain Black

BB Brushed Brass

Beam Angle

15° 24° 36°





Light Distribution For 3000K

Spot 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1532 | ø0.27 |
| 2 | 383.1 | ø0.54 |
| 3 | 170.2 | ø0.81 |
| 4 | 95.76 | ø1.09 |
| 5 | 61.32 | ø1.36 |

Medium 36°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 880.8 | ø0.38 |
| 2 | 220.2 | ø0.76 |
| 3 | 97.92 | ø1.14 |
| 4 | 55.08 | ø1.53 |
| 5 | 34.84 | ø1.91 |


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 583.4 | ø0.57 |
| 2 | 145.8 | ø1.15 |
| 3 | 64.80 | ø1.72 |
| 4 | 36.46 | ø2.30 |
| 5 | 23.34 | ø2.88 |



Sketch

 Cutout: 133x55mm
 5-25mm

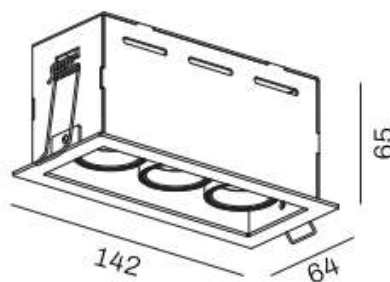

Reto 135

Triple square grilled downlight;
355 degree rotate & 20 degree tilt;
interchangeable baffle;

TL-DL-3446

Light Source

3x6W 900lm, 150mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

☐ AW White
☒ AB Black

Baffle Finishes

☐ WH Plain White
☒ BK Plain Black
☐ BB Brushed Brass

Beam Angle

☐ 15° ☐ 24° ☐ 36°
☒ III ☒ CE ☐ IP21

Light Distribution For 3000K

Spot 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2554 | ø0.27 |
| 2 | 638.6 | ø0.54 |
| 3 | 283.8 | ø0.81 |
| 4 | 159.6 | ø1.09 |
| 5 | 102.2 | ø1.36 |

Medium 36°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1468 | ø0.64 |
| 2 | 367.1 | ø1.27 |
| 3 | 163.2 | ø1.91 |
| 4 | 91.80 | ø2.55 |
| 5 | 58.70 | ø3.19 |


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 972.4 | ø0.96 |
| 2 | 243.1 | ø1.92 |
| 3 | 108.0 | ø2.88 |
| 4 | 60.78 | ø3.84 |
| 5 | 38.90 | ø4.80 |




Sketch

 Cutout: 100x100mm
 5-25mm



+30°~-30°



Clea 100

Compact square spot;
Gimble tilt 30 degree;
IP54;

TL-DL-3232

Light Source

10W 650lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°
☒  ☒ CE ☒ IP54


Light Distribution For 2700K

Wide 44.1°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1235 | ø0.81 |
| 2 | 308.7 | ø1.62 |
| 3 | 137.2 | ø2.43 |
| 4 | 77.17 | ø3.24 |
| 5 | 49.39 | ø4.05 |



Sketch

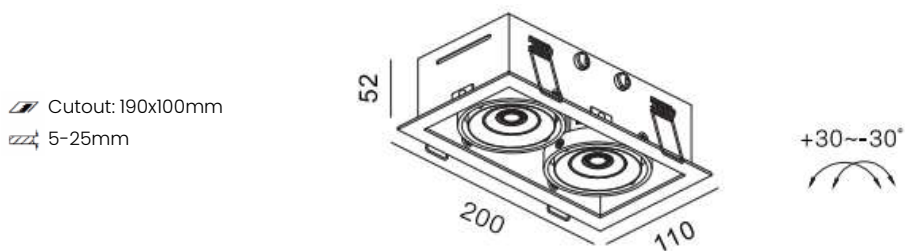

Clea 190

Compact square spot;
Gimble tilt 30 degree;
IP54;

TL-DL-3233

Light Source

2x10W 1200lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°




Light Distribution For 2700K

Wide 43°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2517 | ø0.78 |
| 2 | 629.2 | ø1.57 |
| 3 | 279.6 | ø2.36 |
| 4 | 157.3 | ø3.15 |
| 5 | 100.7 | ø3.94 |



Sketch

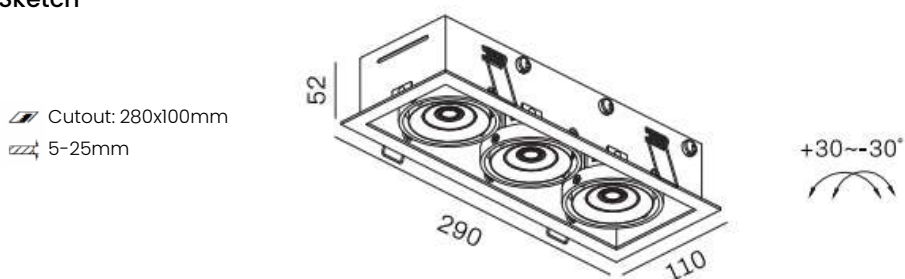

Clea 280

Compact square spot;
Gimble tilt 30 degree;
IP54;

TL-DL-3350

Light Source

3x10W 1700lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°



Light Distribution For 3000K

Spot 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 7878 | ø0.46 |
| 2 | 1969 | ø0.91 |
| 3 | 875.3 | ø1.36 |
| 4 | 492.4 | ø1.82 |
| 5 | 315.1 | ø2.27 |

Medium 36°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 4358 | ø0.64 |
| 2 | 1089 | ø1.29 |
| 3 | 484.2 | ø1.93 |
| 4 | 272.4 | ø2.58 |
| 5 | 174.3 | ø3.22 |


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2847 | ø0.95 |
| 2 | 711.7 | ø1.91 |
| 3 | 316.3 | ø2.86 |
| 4 | 177.9 | ø3.81 |
| 5 | 113.9 | ø4.77 |



Sketch

 Cutout: 113x105mm
 5-25mm

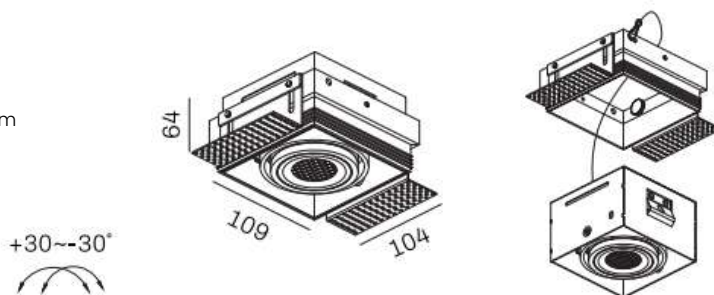

Elisa Square 100

Trimless square spots;
Gimble tilt 30 degree;
IP54;

TL-DL-3108

Light Source

2x10W 500lm, 250mA 36V, CRI>90, SDCM<3
LES006. LES09

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°

☒ III ☒ CE ☒ IP54 ☒ D2W



Light Distribution For 3000K


Medium 31.4°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1131 | ø0.56 |
| 2 | 282.7 | ø1.12 |
| 3 | 125.7 | ø1.68 |
| 4 | 70.69 | ø2.24 |
| 5 | 45.24 | ø2.81 |



Sketch

 Cutout: 201x113mm
 5-25mm

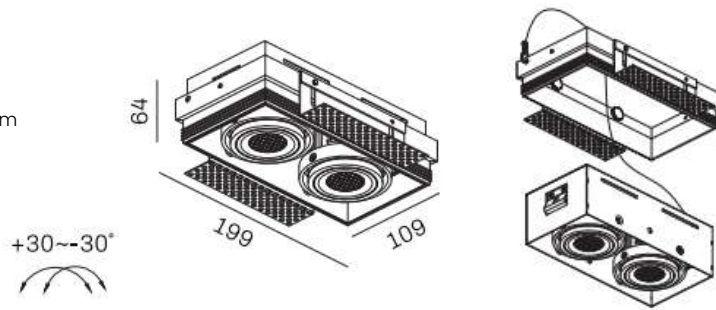

Elisa Rectangle 200

Trimless square spots;
Gimble tilt 30 degree;
IP54;

TL-DL-3115

Light Source

2x10W 1000lm, 250mA 36V, CRI>90, SDCM<3
LES006. LES09

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24° ☐ 36° ☐ 45°





Light Distribution For 3000K


Medium 31°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2270 | ø0.55 |
| 2 | 567.5 | ø1.11 |
| 3 | 252.2 | ø1.66 |
| 4 | 141.9 | ø2.22 |
| 5 | 90.81 | ø2.77 |



Sketch

 Cutout: 122x122mm
 5-25mm

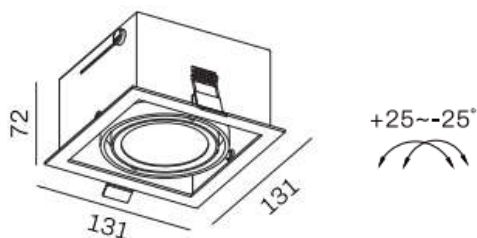

Mirage 131

Jumbo griled downlight;
Low glare;

TL-DL-3360

Light Source

15-20W 1350lm, 350-500mA 36V, CRI>90,
SDCM<3
LES013

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36°
☒ III ☒ CE ☒ IP21

Light Distribution For 2700-5000K

Medium 40.3°


Wide 56.4°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2493 | ø0.73 |
| 2 | 623.3 | ø1.46 |
| 3 | 277.0 | ø2.20 |
| 4 | 155.8 | ø2.94 |
| 5 | 99.73 | ø3.67 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1647 | ø1.07 |
| 2 | 411.7 | ø2.14 |
| 3 | 183.0 | ø3.21 |
| 4 | 102.9 | ø4.29 |
| 5 | 65.88 | ø5.36 |



Sketch

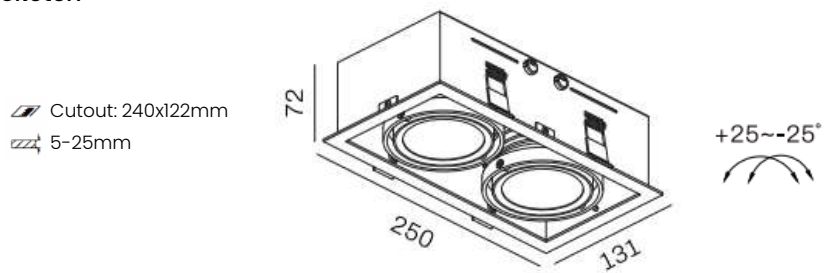

Mirage 250

Twin spots;
Low glare;

TL-DL-3359

Light Source

3x15W-3x20W 2780lm, 350-500mA 36V,
CRI>90, SDCM<3
LES013

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
III CE IP21



Light Distribution For 3000K


Wide 39.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 4738 | ø0.71 |
| 2 | 1184 | ø1.42 |
| 3 | 526.4 | ø2.14 |
| 4 | 296.1 | ø2.85 |
| 5 | 189.5 | ø3.57 |



Sketch

 Cutout: 356x122mm
 5-25mm

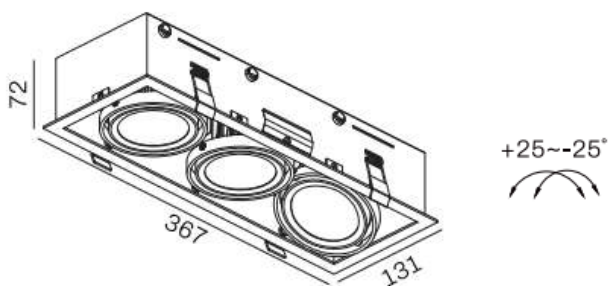

Mirage 367

Large size square gridded downlight;
Big reflector type;
Low UGR;

TL-DL-3643

Light Source

3x15W-3x20W 3800lm, 350-500mA 36V,
CRI>90, SDCM<3
LES013

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36°
☒  ☒ CE ☐ IP21

Light Distribution For 3000K

Spot 21°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 24986 | Ø0.38 |
| 2 | 6247 | Ø0.75 |
| 3 | 2776 | Ø1.13 |
| 4 | 1562 | Ø1.51 |
| 5 | 999.4 | Ø1.89 |

Medium 40°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 5180 | Ø0.73 |
| 2 | 1295 | Ø1.47 |
| 3 | 575.6 | Ø2.20 |
| 4 | 323.8 | Ø2.94 |
| 5 | 207.2 | Ø3.67 |

Wide 50.5°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3460 | Ø0.94 |
| 2 | 846.9 | Ø1.88 |
| 3 | 384.4 | Ø2.83 |
| 4 | 216.2 | Ø3.77 |
| 5 | 138.4 | Ø4.72 |



Semi

Semi offers a pendant effect below the ceiling, and this is the attractive feature of the range.





Sketch

 Cutout: 38mm
 5-25mm



Ovalis 40

Compact semi recessed downlight;
Available with various finishes;

TL-DL-3298

Light Source

6W 250lm, 150mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black
RG Rose Gold

Beam Angle

15° 24° 36°
  

Light Distribution For 3000K

Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1972 | Ø0.27 |
| 2 | 492.9 | Ø0.54 |
| 3 | 219.1 | Ø0.82 |
| 4 | 123.2 | Ø1.09 |
| 5 | 78.87 | Ø1.36 |

Medium 20°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1985 | Ø0.35 |
| 2 | 496.3 | Ø0.70 |
| 3 | 220.6 | Ø1.06 |
| 4 | 124.1 | Ø1.41 |
| 5 | 79.41 | Ø1.77 |


Wide 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 835.0 | Ø0.63 |
| 2 | 208.7 | Ø1.27 |
| 3 | 92.77 | Ø1.91 |
| 4 | 52.19 | Ø2.55 |
| 5 | 33.40 | Ø3.19 |



Sketch

 Cutout: 64mm
 5-25mm



Aky 65

Round semi recessed spot;
Simple and elegant design;
Low UGR;

TL-DL-3028

Light Source

10W 750lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 24° ☐ 36°





Light Distribution For 2700K


Wide 35.7°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1286 | Ø0.64 |
| 2 | 321.4 | Ø1.28 |
| 3 | 142.8 | Ø1.93 |
| 4 | 80.35 | Ø2.57 |
| 5 | 51.43 | Ø3.22 |



Sketch

 Cutout: 64mm
 5-25mm



Pablito 65

Round semi recessed spot;
Deep recessed baffle;
Very low UGR (Black);

TL-DL-3026

Light Source

10W 600lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
  



Light Distribution For 2700K


Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2118 | Ø0.40 |
| 2 | 529.6 | Ø0.80 |
| 3 | 235.4 | Ø1.20 |
| 4 | 132.4 | Ø1.60 |
| 5 | 84.74 | Ø2.00 |



Sketch

 Cutout: 64mm
 5-25mm



Antille 85

Square semi recessed spot;
Simple and elegant design;
Low UGR;

TL-DL-3027

Light Source

10W 750lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
  



Light Distribution For 2700K


Wide 35.6°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1282 | Ø0.64 |
| 2 | 320.5 | Ø1.28 |
| 3 | 142.5 | Ø1.93 |
| 4 | 80.14 | Ø2.57 |
| 5 | 51.29 | Ø3.22 |



Sketch

 Cutout: 64mm
 5-25mm



Box 85

Square semi recessed spot;
Deep recessed baffle;
Very low UGR (Black);

TL-DL-3025

Light Source

10W 600lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
  



Light Distribution For 2700K


Medium 24.8°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2022 | Ø0.44 |
| 2 | 505.6 | Ø0.88 |
| 3 | 224.7 | Ø1.32 |
| 4 | 126.4 | Ø1.76 |
| 5 | 80.90 | Ø2.20 |



Sketch

 Cutout: 90mm
 5-25mm



Adamas 90

Round semi recessed spot;
Jumbo version and higher power rated;
Low UGR;

TL-DL-3145

Light Source

15W 1200lm, 350mA 36V, CRI>90, SDCM<3
LES09


Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
  


Light Distribution For 2700K

Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1353 | Ø1.07 |
| 2 | 338.2 | Ø2.13 |
| 3 | 150.3 | Ø3.20 |
| 4 | 84.55 | Ø4.27 |
| 5 | 54.11 | Ø5.34 |



Sketch

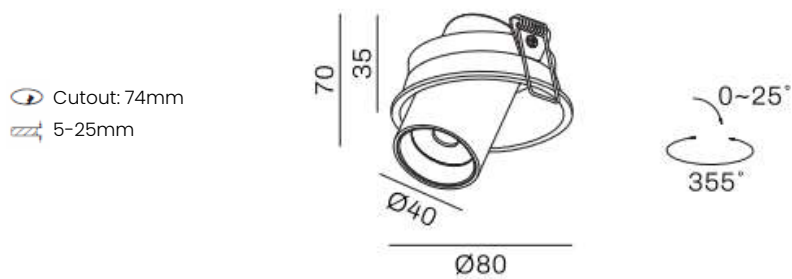

NEW Wetrot 75

Easy maintenance;
Low-glare;
355D rotate & 25D tilt;
Downlight for indoor use;

TL-DL-3600

Light Source

7W 500lm, 180mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Finishes


AW White
AB Black

Beam Angle

15° 24° 36°
III CE IP21



Sketch

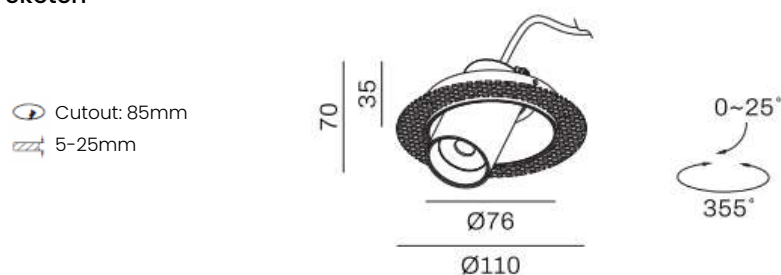

NEW Wetrolux Trimless 75

Easy maintenance;
Low-glare;
355D rotate & 25D tilt;
Downlight for indoor use;

TL-DL-3712

Light Source

7W 532lm, 180mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
III CE IP21

Light Distribution For 2700K

Wide 38.7°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1218 | Ø0.70 |
| 2 | 304.6 | Ø1.41 |
| 3 | 135.4 | Ø2.11 |
| 4 | 73.14 | Ø2.81 |
| 5 | 48.73 | Ø3.52 |



Shower


A range of shower downlights IP65 rated, suitable for using in bathrooms, and other moisture areas.





Sketch

 Cutout: 19mm
 5-25mm



NEW Opera 20

Stainless steel 316;
Micro spot;
IP67;

TL-BS-3023

Light Source

1W 800lm, 350mA 3V, CRI>90, SDCM<3
High power LED


Gear

This product is supplied with LED driver.

Finishes

- AW White
- AB Black
- CH Chrome
- BN Brushed Nickel
- BB Brushed Brass

Beam Angle





Light Distribution For 3000K


Wide 70°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 36.09 | Ø1.39 |
| 2 | 9.022 | Ø2.79 |
| 3 | 4.010 | Ø4.18 |
| 4 | 2.255 | Ø5.57 |
| 5 | 1.443 | Ø6.97 |



Sketch

 Cutout: 70mm
 5-25mm



Mick 70

Round shower downlight;
Interchangeable bezels;
IP65;

TL-DL-3043

Light Source

10W 700lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

- AW White
- AB Black
- CH Chrome
- BN Brushed Nickel
- BB Brushed Brass

Beam Angle





Light Distribution For 2700K


Medium 35.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2185 | Ø0.63 |
| 2 | 546.2 | Ø1.27 |
| 3 | 242.8 | Ø1.90 |
| 4 | 136.6 | Ø2.54 |
| 5 | 87.40 | Ø3.17 |



Sketch

 Cutout: 64mm
 5-25mm

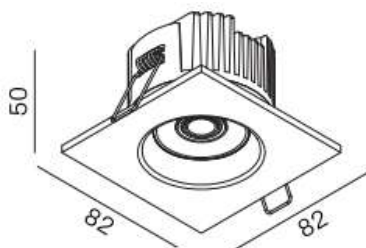

Mick Square 70

Square shower downlight;
Interchangeable bezels;
IP65;

**TL-DL-3043 c/w
square bezel**


Light Source
10W 700lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear
This product is supplied with LED driver.

Finishes

- AW** White
- AB** Black
- CH** Chrome
- BN** Brushed Nickel
- BB** Brushed Brass

Beam Angle






Light Distribution For 2700K Medium 35.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2185 | Ø0.63 |
| 2 | 546.2 | Ø1.27 |
| 3 | 242.8 | Ø1.90 |
| 4 | 136.6 | Ø2.54 |
| 5 | 87.40 | Ø3.17 |



Sketch

 Cutout: 82mm
 5-25mm



Mick Power 82

Round shower downlight;
High power rated;
Interchangeable bezels;
IP65;

TL-DL-3043-15


Light Source
10W 950lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear
This product is supplied with LED driver.

Finishes

| | |
|----|----------------|
| AW | White |
| AB | Black |
| CH | Chrome |
| BN | Brushed Nickel |
| BB | Brushed Brass |

Beam Angle



| | | |
|---|-----|------|
| 24° | 36° | 60° |
|  | CE | IP65 |


Light Distribution For 2700K Medium 23.6°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2983 | Ø0.62 |
| 2 | 745.7 | Ø1.25 |
| 3 | 331.4 | Ø1.87 |
| 4 | 186.4 | Ø2.50 |
| 5 | 119.3 | Ø3.12 |



Sketch

 Cutout: 152x42mm
 5-25mm

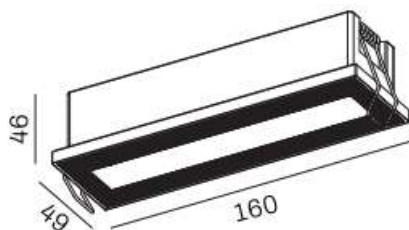

Mick Linear 150

Linear shower spot;
 Available with honeycomb louvre;
 Semi recessed;
 Flush installation via plaster kit;
 IP65;

TL-DL-3179

Light Source

10W 500lm (with honeycomb) 800lm
 (without honeycomb), 700mA 15V, CRI>90,
 SDCM<3

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre;
 Plaster kit

Finishes



Nature Stainless Steel

Beam Angle




Light Distribution For 3000K

Medium 23.6°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2294 | ø0.42 |
| 2 | 573.6 | ø0.84 |
| 3 | 254.9 | ø1.26 |
| 4 | 143.4 | ø1.68 |
| 5 | 91.78 | ø2.09 |


Gyro

A range of shower downlights IP65 rated, suitable for using in bathrooms, and other moisture areas.

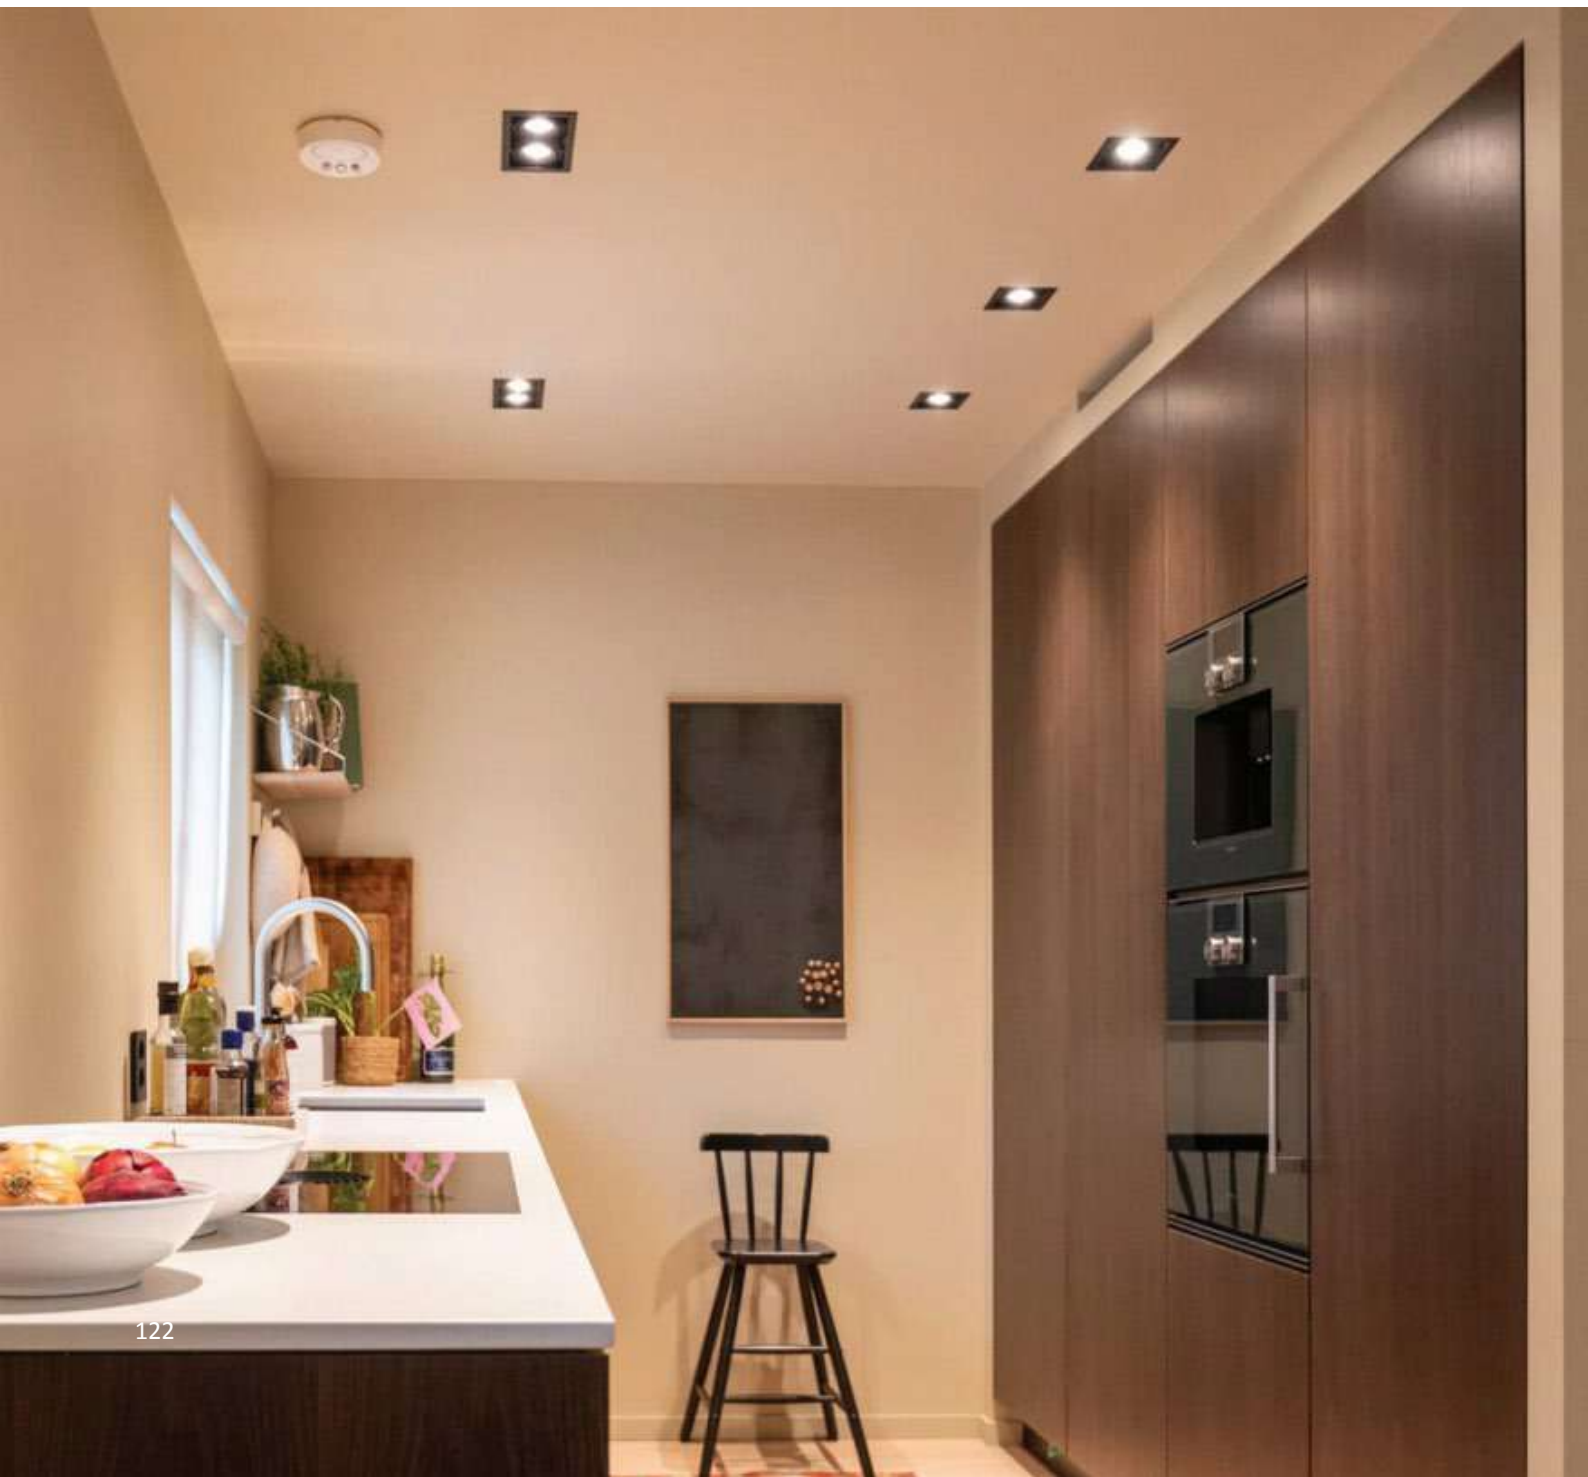



Sketch

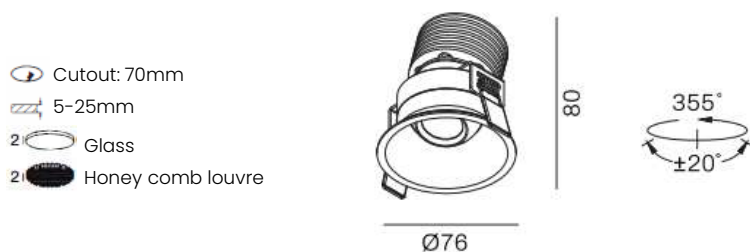

NEW Fary 70

Deep recessed slim trim downlight;
Gyro tiltable add-on honeycomb louvre;
IP65;

TL-DL-3705A

Light Source

10W 700lm, 250mA 36V, CRI>90, SDCM<2
LES04

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 50°
III CE IP65

Light Distribution For 3000K

Spot 15°


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3683 | Ø0.33 |
| 2 | 920.7 | Ø0.67 |
| 3 | 409.2 | Ø1.00 |
| 4 | 230.2 | Ø1.34 |
| 5 | 147.3 | Ø1.67 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 783.0 | Ø0.87 |
| 2 | 195.7 | Ø1.74 |
| 3 | 87.00 | Ø2.61 |
| 4 | 48.94 | Ø3.48 |
| 5 | 31.32 | Ø4.35 |



Sketch

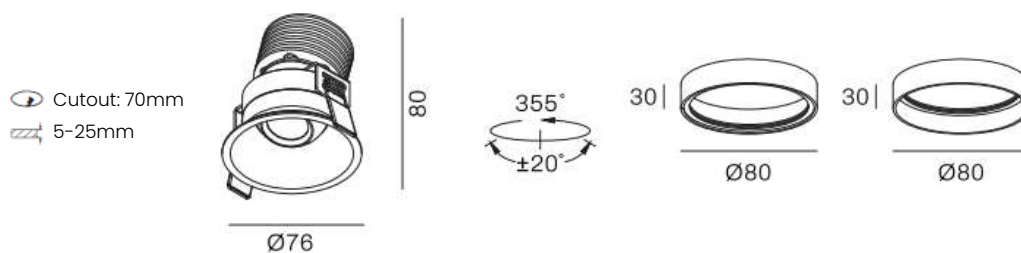

NEW Wetro 20

Gyro 70 with semi recessed adaptor ring;

TL-DL-3705B

Light Source

10W 700lm, 250mA, CRI>90, SDCM<2
LES04

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 50°
III CE IP65

Light Distribution For 3000K

Spot 15°


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3683 | Ø0.33 |
| 2 | 920.7 | Ø0.67 |
| 3 | 409.2 | Ø1.00 |
| 4 | 230.2 | Ø1.34 |
| 5 | 147.3 | Ø1.67 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 783.0 | Ø0.87 |
| 2 | 195.7 | Ø1.74 |
| 3 | 87.00 | Ø2.61 |
| 4 | 48.94 | Ø3.48 |
| 5 | 31.32 | Ø4.35 |



Sketch

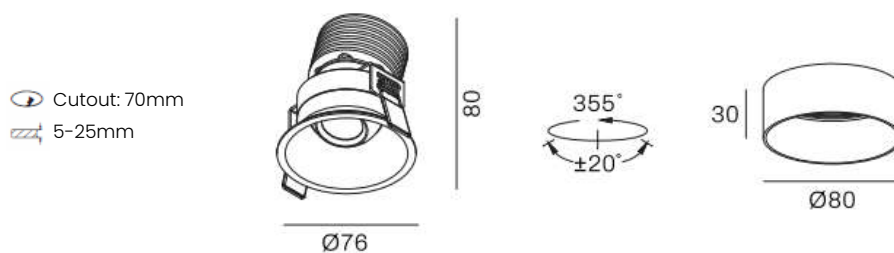

NEW Wetro 40

Gyro 70 with semi recessed ring;

TL-DL-3705C

Light Source

10W 700lm, 250mA, CRI>90, SDCM<2
LES04

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 50°
III CE IP65

Light Distribution For 3000K

Spot 15°


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3683 | Ø0.33 |
| 2 | 920.7 | Ø0.67 |
| 3 | 409.2 | Ø1.00 |
| 4 | 230.2 | Ø1.34 |
| 5 | 147.3 | Ø1.67 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 783.0 | Ø0.87 |
| 2 | 195.7 | Ø1.74 |
| 3 | 87.00 | Ø2.61 |
| 4 | 48.94 | Ø3.48 |
| 5 | 31.32 | Ø4.35 |



Sketch

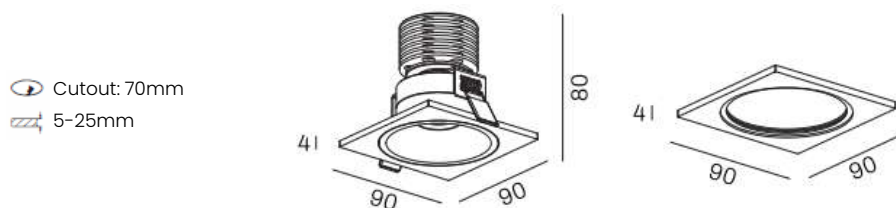

NEW Antille 90

Gyro 70 with square bezel;

TL-DL-3705D

Light Source

10W 700lm, 250mA, CRI>90, SDCM<2
LES04

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 50°
III CE IP65

Light Distribution For 3000K

Spot 15°


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3683 | Ø0.33 |
| 2 | 920.7 | Ø0.67 |
| 3 | 409.2 | Ø1.00 |
| 4 | 230.2 | Ø1.34 |
| 5 | 147.3 | Ø1.67 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 783.0 | Ø0.87 |
| 2 | 195.7 | Ø1.74 |
| 3 | 87.00 | Ø2.61 |
| 4 | 48.94 | Ø3.48 |
| 5 | 31.32 | Ø4.35 |



Sketch

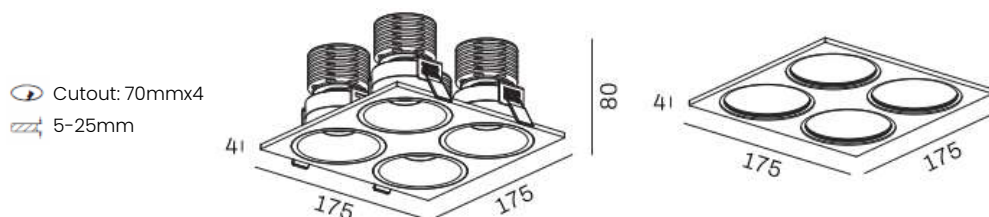

NEW Antille 175

Gyro 70 with 4 spots bezel;

TL-DL-3705E

Light Source

4pcs*10W 700lm, 250mA 36V, CRI>90,
SDCM<2, LES04

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 50°
III CE IP65

Light Distribution For 3000K

Spot 15°


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 11785 | Ø0.36 |
| 2 | 2946 | Ø0.70 |
| 3 | 1309 | Ø1.03 |
| 4 | 736.6 | Ø1.38 |
| 5 | 471.3 | Ø1.70 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2349 | Ø1.17 |
| 2 | 587.1 | Ø2.04 |
| 3 | 261.0 | Ø2.91 |
| 4 | 146.8 | Ø3.78 |
| 5 | 93.96 | Ø4.65 |



Sketch

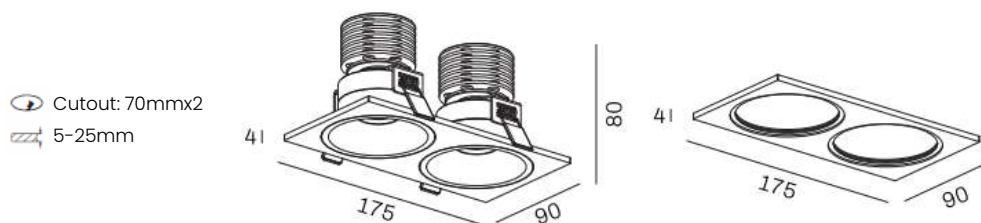

NEW Matrix 175

Gyro 70 with 2 spots bezel;

TL-DL-3705F

Light Source

2pcs*10W 700lm, 250mA 36V, CRI>90,
SDCM<2, LES04

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 50°
III CE IP65

Light Distribution For 3000K

Spot 15°


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 6629 | Ø0.34 |
| 2 | 1657 | Ø0.68 |
| 3 | 736.5 | Ø1.01 |
| 4 | 414.3 | Ø1.35 |
| 5 | 265.1 | Ø1.68 |

| h(m) | E(lx) | ø(m) |
|------|--------|-------|
| 1 | 1174.5 | Ø0.97 |
| 2 | 293.5 | Ø1.84 |
| 3 | 130.5 | Ø2.71 |
| 4 | 73.41 | Ø3.58 |
| 5 | 48.46 | Ø4.45 |



Sketch

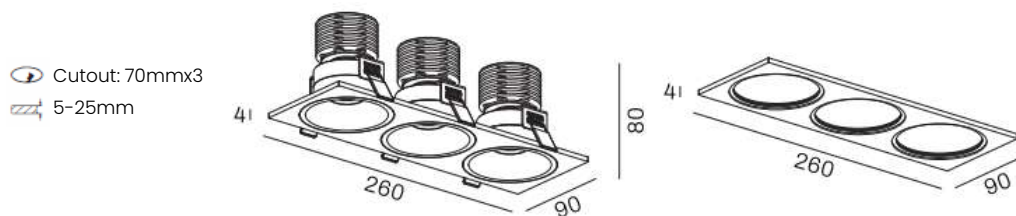

NEW Matrix 260

Gyro 70 with 3 spots bezel;

TL-DL-3705G

Light Source

3pcs*10W 700lm, 250mA 36V, CRI>90,
SDCM<2, LES04

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 50°
III CE IP65

Light Distribution For 3000K

Spot 15°


Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 9391 | Ø0.35 |
| 2 | 2347 | Ø0.69 |
| 3 | 1043 | Ø1.02 |
| 4 | 587.1 | Ø1.36 |
| 5 | 375.6 | Ø1.69 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1566 | Ø1.07 |
| 2 | 391.4 | Ø1.94 |
| 3 | 174.0 | Ø2.81 |
| 4 | 97.88 | Ø3.68 |
| 5 | 62.64 | Ø4.55 |



Cabinets

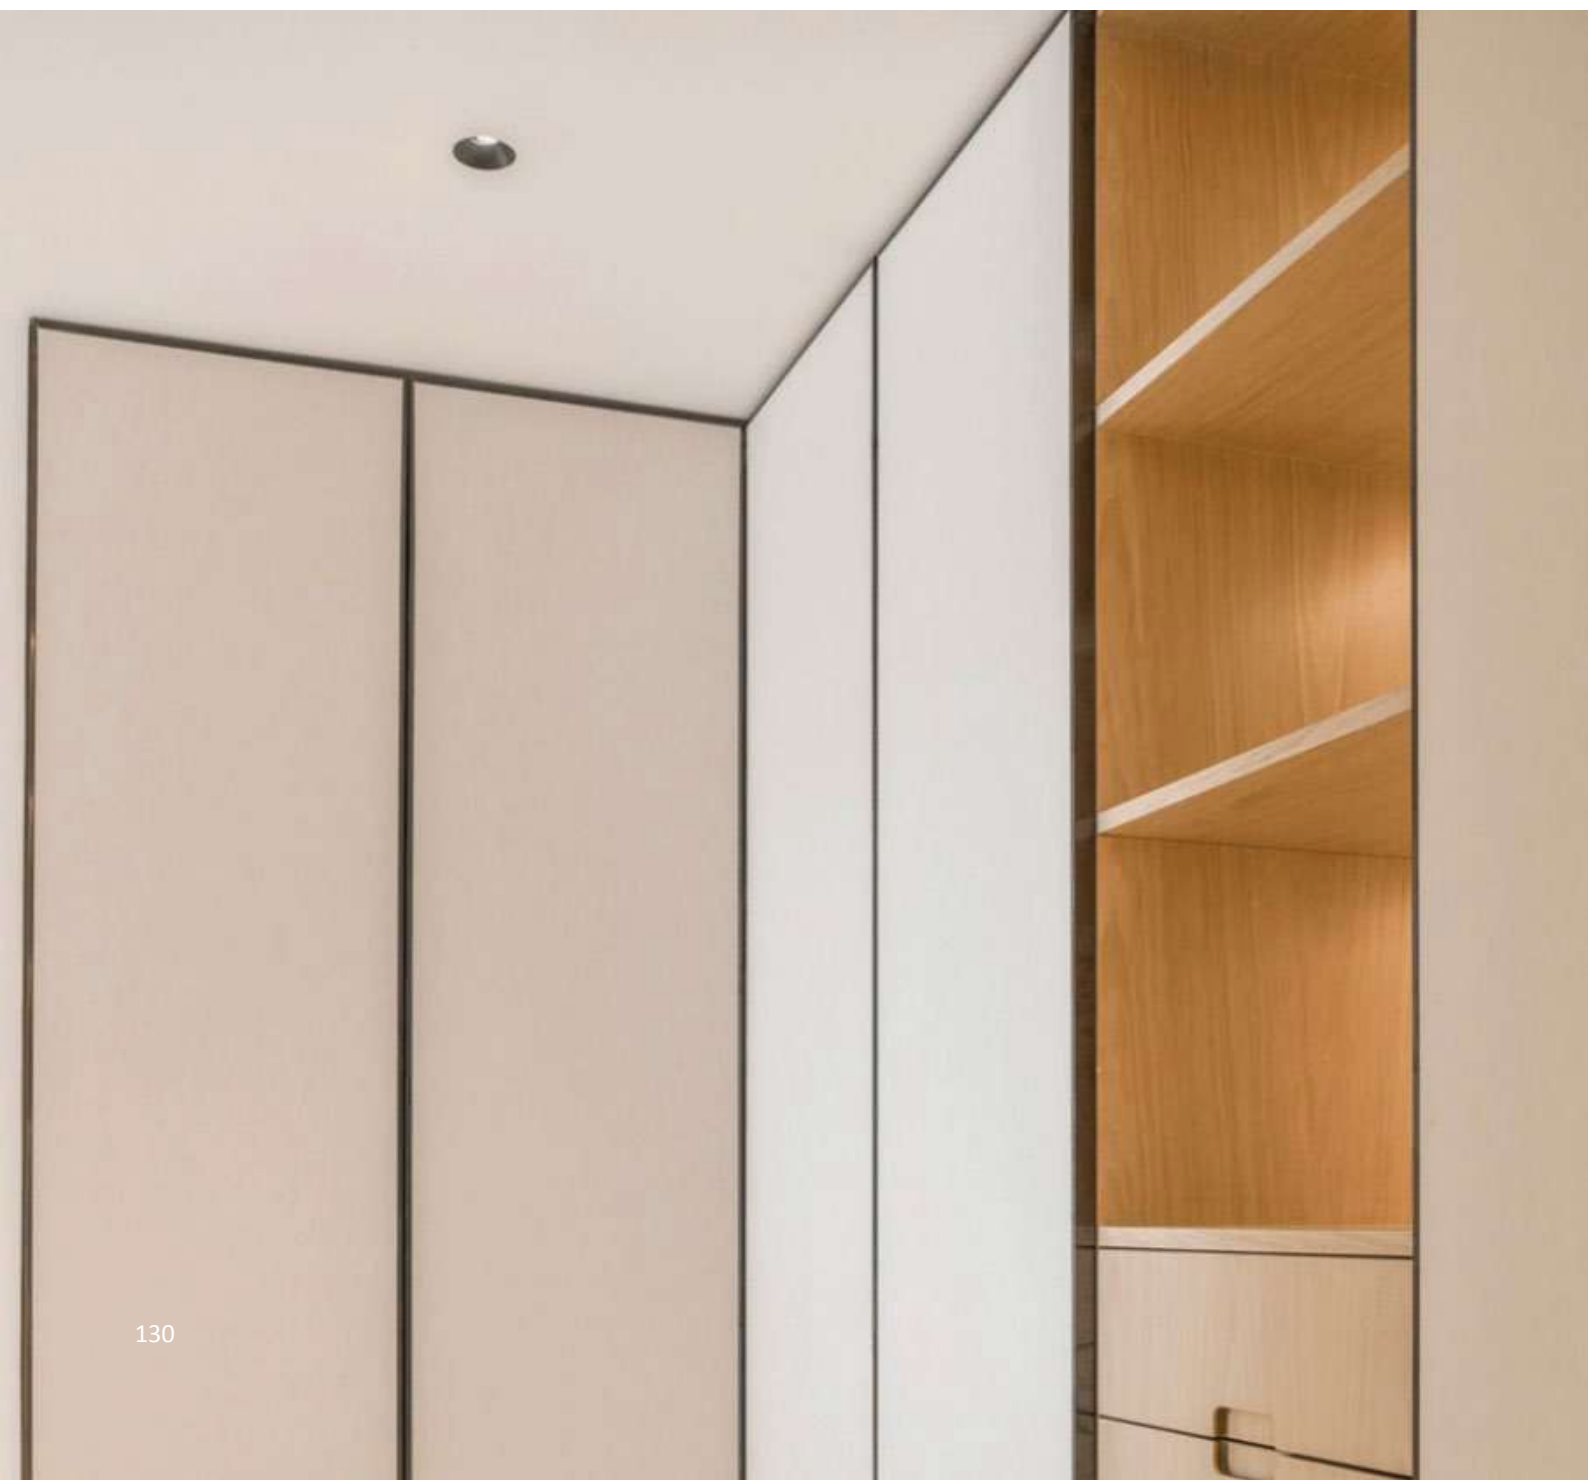
Cabinet lighting are usually shallower, smaller with wattage, and various in shapes.





Sketch

 Cutout: 35mm
 5-25mm

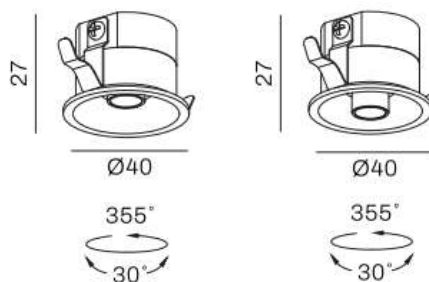

Alla Gimble 35

Mini snoot;
 Gyro tilt;
 Optional long or short snoot;

TL-DL-3367

Light Source

15W 120lm, 350mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 20° ☐ 30° ☐ 40°
☒ III ☒ CE ☒ IP54



Light Distribution For 2700K


Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 402.4 | Ø0.44 |
| 2 | 200.6 | Ø0.88 |
| 3 | 44.71 | Ø1.31 |
| 4 | 25.15 | Ø1.75 |
| 5 | 16.09 | Ø2.19 |



Sketch

 Cutout: 52mm
 5-25mm



Alla Washer 50

Mini washer;
360 degree rotate & 90 degree tilt;
Dual color design;

TL-DL-333I

Light Source

3W 120lm, 700mA 3V, CRI>90, SDCM<3


Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 50°
  

Light Distribution For 3000K

Spot 18°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 551.1 | Ø0.32 |
| 2 | 137.8 | Ø0.65 |
| 3 | 61.23 | Ø0.97 |
| 4 | 34.44 | Ø1.30 |
| 5 | 22.04 | Ø1.62 |

Medium 24°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 402.4 | Ø0.44 |
| 2 | 100.6 | Ø0.88 |
| 3 | 44.71 | Ø1.31 |
| 4 | 26.15 | Ø1.75 |
| 5 | 16.09 | Ø2.19 |


Wide 34°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 276.0 | Ø0.60 |
| 2 | 69.00 | Ø1.22 |
| 3 | 30.67 | Ø1.83 |
| 4 | 17.25 | Ø2.43 |
| 5 | 11.04 | Ø3.04 |



Sketch

 Cutout: 34mm
 5-25mm



Alla Drop 35

Mini snoot;
Semi pendant design;

TL-DL-3132

Light Source

3W 100lm, 700mA 3V, CRI>90, SDCM<3




Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

20° 30° 40°
  


Light Distribution For 2700K

Wide 33.8°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 276.0 | Ø0.61 |
| 2 | 69.00 | Ø1.22 |
| 3 | 30.67 | Ø1.82 |
| 4 | 17.25 | Ø2.43 |
| 5 | 11.04 | Ø3.04 |



Sketch

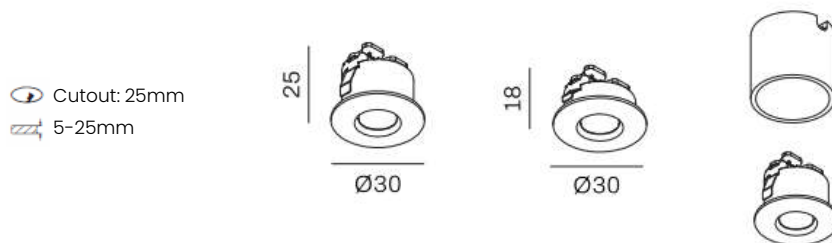

Manto 25

Micro under cabinet light;
Low UGR;

TL-DL-3240

Light Source

1W 60lm, 350mA 3V, CRI>90, SDCM<3

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 36° 80°
III CE IP44

Light Distribution For 2700K

Spot 22°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 258.7 | Ø0.39 |
| 2 | 64.67 | Ø0.78 |
| 3 | 28.74 | Ø1.17 |
| 4 | 16.17 | Ø1.56 |
| 5 | 10.35 | Ø1.95 |

Medium 25.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 265.5 | Ø0.45 |
| 2 | 66.36 | Ø0.90 |
| 3 | 29.49 | Ø1.35 |
| 4 | 16.59 | Ø1.80 |
| 5 | 10.62 | Ø2.25 |



Sketch

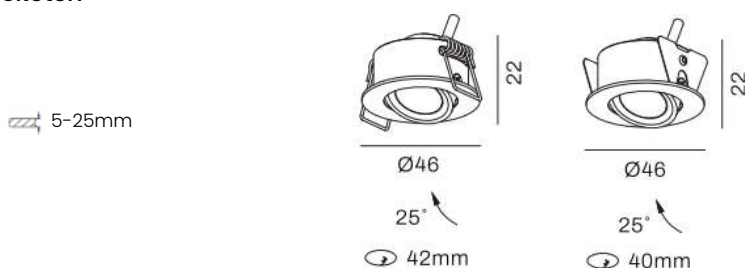

Roby 40

Mini tiltable downlight;
24V constant voltage input;
Dimmable;
IP44;

TL-DL-3606

Light Source

3W 150lm, 24V, CRI>90, SDCM<3
SMD5050

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

20° 36° 50°
III CE IP44



Light Distribution For 2700K


Medium 39.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 215.8 | Ø0.71 |
| 2 | 53.95 | Ø1.43 |
| 3 | 23.98 | Ø2.14 |
| 4 | 13.49 | Ø2.85 |
| 5 | 8.633 | Ø3.57 |



Sketch

 Cutout: 45mm
 5-25mm



Romor Tilt 45

Step in bezel;
 24V constant voltage input;
 Dimmable;
 IP44;

TL-DL-3300

Light Source
 3W 223lm, 24V, CRI>90, SDCM<3
 SMD5050

Gear
 This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

20° 36° 50°
  

Light Distribution For 3000K

Spot 15.8°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2071 | Ø0.28 |
| 2 | 517.7 | Ø0.56 |
| 3 | 230.1 | Ø0.83 |
| 4 | 129.4 | Ø1.11 |
| 5 | 82.83 | Ø1.39 |

Medium 19.4°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1832 | Ø0.34 |
| 2 | 457.9 | Ø0.68 |
| 3 | 203.5 | Ø1.03 |
| 4 | 114.5 | Ø1.37 |
| 5 | 73.27 | Ø1.71 |


Wide 35.7°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 781.9 | Ø0.64 |
| 2 | 195.5 | Ø1.29 |
| 3 | 86.88 | Ø1.93 |
| 4 | 48.87 | Ø2.57 |
| 5 | 31.28 | Ø3.22 |



Sketch

 Cutout: 50x50mm
 5-25mm

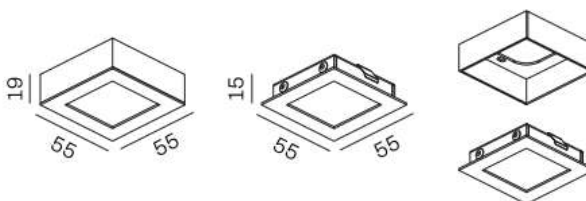

Antille 50

Ultra slim design;
 24V constant voltage input;
 Dimmable;
 IP44;

TL-SD-3068

Light Source

3W 220lm, 24V, CRI>90, SDCM<3
 SMD2835

Gear

This product is supplied with LED driver.




Accessories

Premount surface box

Finishes

AW White
AB Black

Beam Angle

80°
  



Light Distribution For 3000K


Wide 90°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 43.52 | ø2.00 |
| 2 | 10.88 | ø4.00 |
| 3 | 4.836 | ø6.00 |
| 4 | 2.720 | ø8.00 |
| 5 | 1.741 | ø10.0 |



Sketch

 Cutout: 64mm
 5-25mm



Tano 65

Ultra slim round cabinet light;
IP44;

TL-DL-3190

Light Source

5W 300lm, 500mA 9V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Premount surface box

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 36° ☐ 50°

☒ III ☒ CE ☒ IP44



Light Distribution For 2700K


Medium 32.8°

| h(m) | E(lx) | Ø(m) |
|------|-------|-------|
| 1 | 795.8 | Ø0.59 |
| 2 | 199.0 | Ø1.17 |
| 3 | 88.42 | Ø1.77 |
| 4 | 49.74 | Ø2.35 |
| 5 | 31.83 | Ø2.95 |



Sketch

 Cutout: 55mm
 5-25mm



Elio 50

Ultra flat under cabinet light;
40D tilt;

TL-DL-3573

Light Source

4W 189lm, 350mA 9V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☒ III ☒ CE ☒ IP21

Light Distribution For 2700K

Medium 32.8°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 765.8 | Ø0.59 |
| 2 | 199.0 | Ø1.17 |
| 3 | 88.42 | Ø1.77 |
| 4 | 49.74 | Ø2.35 |
| 5 | 31.83 | Ø2.95 |



Sketch



NEW Soho 565

Surface mount under cabinet light;
Supplied with switch;
Built-in phase cut dimming LED driver;

TL-WL-3177

Light Source

10W 811lm, 250mA 36V, CRI>90, SDCM<3

Gear

This product is supplied with phase-cut dimming driver. DALI driver available upon request.

Finishes

AW White
AB Black

Beam Angle




Light Distribution For 3000K

Wide 106°

| h(m) | E(lx) | ø(m) |
|------|-------|--------|
| 1 | 105.7 | ø2.55 |
| 2 | 26.42 | ø5.11 |
| 3 | 11.64 | ø7.67 |
| 4 | 6.600 | ø10.23 |
| 5 | 4.200 | ø12.79 |



Sketch



NEW Soho 1125

Surface mount under cabinet light;
Supplied with switch;
Built-in phase cut dimming LED driver;

TL-WL-3178

Light Source

20W 153lm, 500mA 36V, CRI>90, SDCM<3

Gear

This product is supplied with phase-cut dimming driver. DALI driver available upon request.

Finishes

AW

White

AB

Black

Beam Angle



Light Distribution For 3000K

Medium 106°

| h(m) | E(lx) | ø(m) |
|------|-------|--------|
| 1 | 189.5 | Ø2.57 |
| 2 | 47.37 | Ø5.15 |
| 3 | 21.05 | Ø7.73 |
| 4 | 11.84 | Ø10.31 |
| 5 | 7.570 | Ø12.89 |


Hospitality


Hospitality series are products more appearing to public or commercial area where special request of light is needed for special reason. We have more customized lighting available upon client's request.





Sketch

 Cutout: 206x26mm
 5-25mm



Opera Blade Washer 200

Fixed wall washer;
Special blade design;
Slim trim version;

TL-DL-3341

Light Source

12W 450lm, 700mA 15V, CRI>90, SDCM<3

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 24°
☒   



Light Distribution For 2700K


Wide 35.9°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 164.8 | ø0.65 |
| 2 | 41.20 | ø1.30 |
| 3 | 18.31 | ø1.95 |
| 4 | 10.60 | ø2.60 |
| 5 | 6.591 | ø3.25 |



Sketch

 Cutout: 70mm
 5-25mm

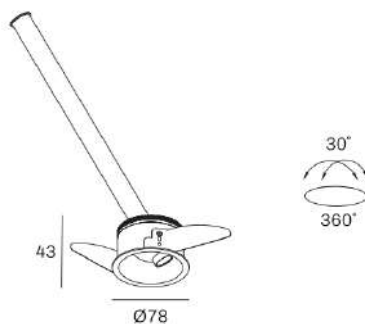

Opera Telescope Gyro 70

60cm retractable tube;
30 degree gyro tilt;
Super slim tube;

TL-DL-3421

Light Source

7W 385lm, 180mA 36V, CRI>90, SDCM<3
LES03


Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black


Beam Angle

15° 36°
  


Light Distribution For 2700K

Spot 12°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2645 | Ø0.29 |
| 2 | 661.2 | Ø0.58 |
| 3 | 293.9 | Ø0.87 |
| 4 | 165.9 | Ø1.16 |
| 5 | 105.8 | Ø1.45 |

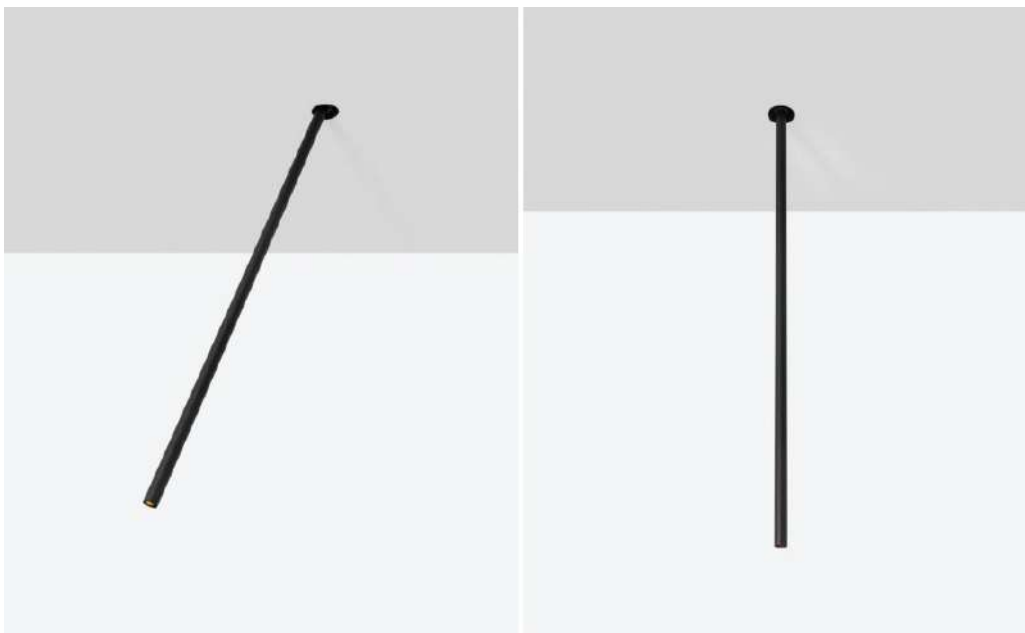

Sketch

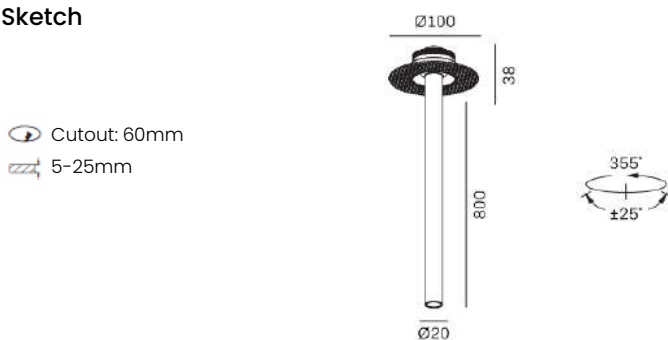

NEW Opera Cylinder
Gyro 60

Ultra slim design;
Fix & tilt 2 in 1;
Long & slim spot;

TL-DL-3638

Light Source
6W 320lm, 500mA 12V, CRI>90, SDCM<3

Gear
This product is supplied with LED driver.

Finishes


AW White
AB Black

Beam Angle



15° 36°
III CE IP21


Light Distribution For 3000K
Spot 13°
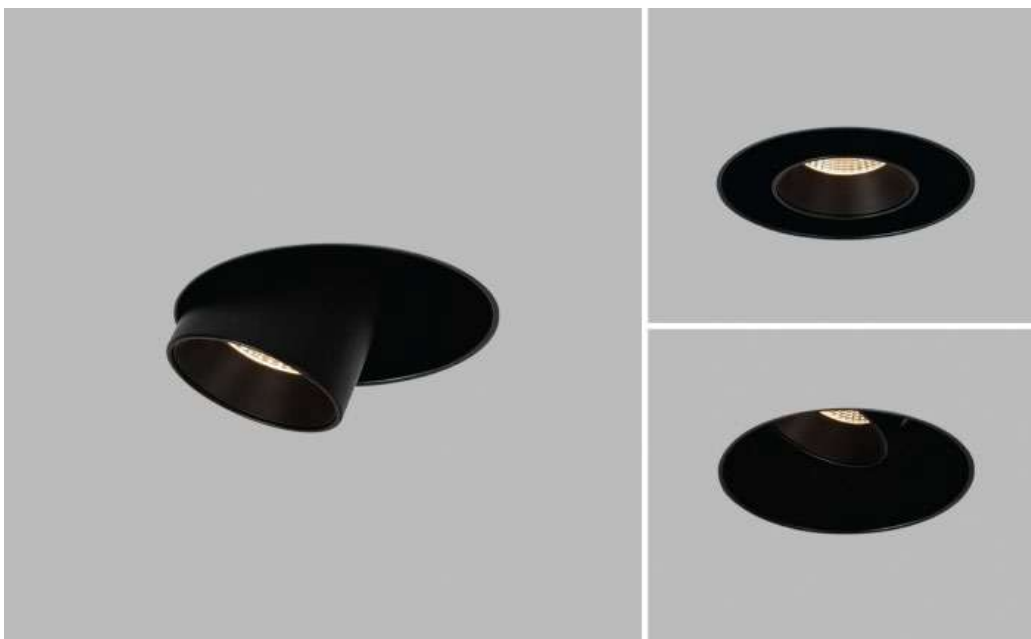
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1003 | ø0.23 |
| 2 | 250.7 | ø0.45 |
| 3 | 111.4 | ø0.68 |
| 4 | 62.67 | ø0.91 |
| 5 | 40.11 | ø1.14 |



Sketch

 Cutout: 120mm
 5-25mm

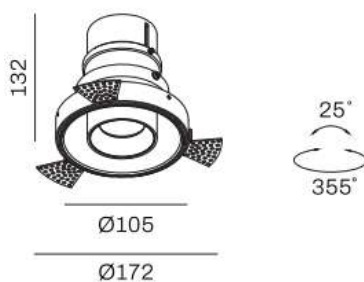

Opera Spy Eye 100

355 degree rotate and 25 degree tilt;
Retractable tube with 3 steps;
Trimless installation;

TL-DL-3198

Light Source

20W 1100lm, 500mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 36°
  

Light Distribution For 3000K

Spot 19°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 5299 | Ø0.34 |
| 2 | 1325 | Ø0.67 |
| 3 | 588.8 | Ø1.01 |
| 4 | 331.2 | Ø1.34 |
| 5 | 212.0 | Ø1.68 |


Medium 20°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 5095 | Ø0.40 |
| 2 | 1274 | Ø0.81 |
| 3 | 566.1 | Ø1.21 |
| 4 | 318.4 | Ø1.62 |
| 5 | 203.8 | Ø2.02 |



Sketch

 Cutout: 72mm
 5-25mm

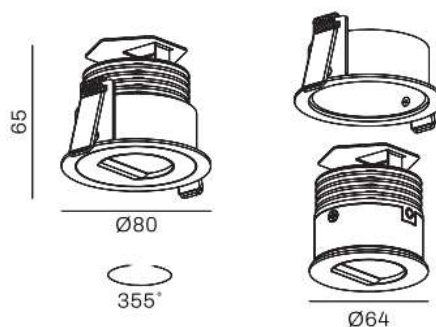

NEW Opera Washer 72

Compact wall washer;
IC-F in compliance;
Easy maintenance;

TL-DL-3670

Light Source

10W 670lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 36°
☒  ☒ CE ☒ IP21



Light Distribution For 3000K


Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 753.3 | Ø0.70 |
| 2 | 188.3 | Ø1.40 |
| 3 | 83.70 | Ø2.11 |
| 4 | 47.08 | Ø2.81 |
| 5 | 30.13 | Ø3.51 |



Sketch

 Cutout: 82mm
 5-25mm

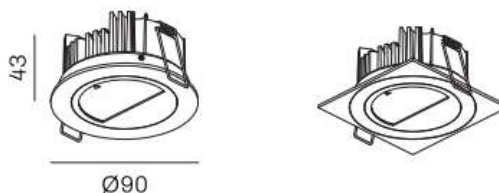

Opera Washer 82

Fixed wall washer;
Asymmetric lens;
70% even washer;

TL-DL-3243

Light Source

15W 1100lm, 350mA 36V, CRI>90, SDCM<3
LES013

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

34°






Light Distribution For 3000K


Wide 34.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1204 | ø0.62 |
| 2 | 300.9 | ø1.24 |
| 3 | 133.7 | ø1.85 |
| 4 | 75.22 | ø2.47 |
| 5 | 48.14 | ø3.09 |



Sketch

 Cutout: 85mm
 5-25mm



NEW **Opera Trimless Washer 85**

Compact size;
Wall washer;
Downlight for indoor use;

TL-DL-3661

Light Source

15W 1200lm, 350mA 36V, CRI>90, SDCM<3
LES013

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°





Light Distribution For 3000K


Medium 28°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1351 | Ø0.64 |
| 2 | 337.9 | Ø1.28 |
| 3 | 150.2 | Ø1.91 |
| 4 | 84.47 | Ø2.55 |
| 5 | 54.06 | Ø3.19 |



Sketch

 Cutout: 82mm
 5-25mm

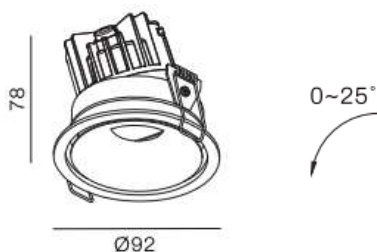

NEW Opera Tilt Halo 82

Adjustable curved downlight;
Halo design;
IP44;

TL-DL-3259

Light Source

10W 1200lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with LED driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 15° ☐ 25° ☐ 38° ☐ 60°
☒ III ☒ CE ☒ IP21 ☒ D2W 6TW

Light Distribution For 3000K

Medium 28°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1351 | Ø0.64 |
| 2 | 337.9 | Ø1.28 |
| 3 | 150.2 | Ø1.91 |
| 4 | 84.47 | Ø2.55 |
| 5 | 54.06 | Ø3.19 |

Slim



The slim range spots are one of the most popular range in Lux Luci's product list. People like the classic shape of light, and the design do last for a long period of time.


SURFACE MOUNTED





Sketch

 Cutout: 45mm
 5-25mm



NEW Conica 35

Compact design;
Mini spot;

TL-SD-3175

Light Source

6W 600lm, 500mA 12V, CRI>90, SDCM<2
CREE XHP35

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
  


Light Distribution For 3000K

Spot 18°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 4291 | ø0.32 |
| 2 | 1073 | ø0.63 |
| 3 | 476.7 | ø0.94 |
| 4 | 268.2 | ø1.26 |
| 5 | 171.6 | ø1.57 |



Sketch

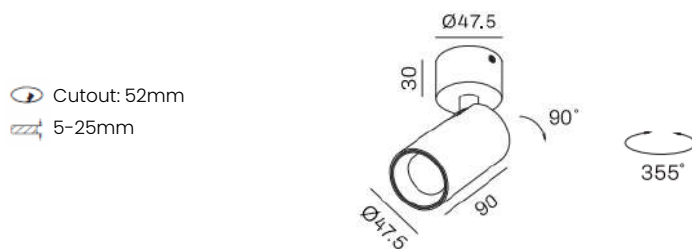

Conica 45

Surface mounting adjustable spot;
355 degree rotate & 90 degree tilt;

TL-SD-3049

Light Source

10W 678lm, 230mA 10V, CRI>90, SDCM<2
LES09

Gear

This product is supplied with driver
on board.

Finishes

- AW** White
- AB** Black

Baffle Finishes

- WH** Plain White
- BK** Plain Black
- SG** Silver Grey
- SB** Sand Brass

Beam Angle

- 20°
- 40°
- 60°
-
-
- IP21


Light Distribution For 3000K

Medium 23°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1660 | Ø0.39 |
| 2 | 415.1 | Ø0.79 |
| 3 | 184.5 | Ø1.19 |
| 4 | 103.8 | Ø1.59 |
| 5 | 66.41 | Ø1.98 |



Sketch

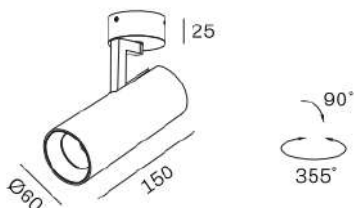

Conica 60

Surface mounting adjustable spot;
Stylish 7 shape bracket;
355 degree rotate & 90 degree tilt;

TL-SD-3045

Light Source

15W 950lm, 230mA 15V, CRI>90, SDCM<2
LES09

Gear

This product is supplied with driver
on board.

Finishes

- AW** White
- AB** Black

Baffle Finishes

- WH** Plain White
- BK** Plain Black
- SG** Silver Grey
- SB** Sand Brass

Beam Angle

- 15°
- 38°
- 60°
-
-
- IP21



Light Distribution For 3000K


Wide 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1700 | Ø0.67 |
| 2 | 425.0 | Ø1.35 |
| 3 | 188.9 | Ø2.03 |
| 4 | 106.2 | Ø2.70 |
| 5 | 68.00 | Ø3.38 |



Sketch

 Cutout: 45mm
 5-25mm



NEW Wetro 35

Compact design;
Mini spot;

TL-DL-3702

Light Source

6W 600lm, 500mA 12V, CRI>90, SDCM<2
CREE XHP35

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
  


Light Distribution For 3000K

Spot 18°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 4291 | ø0.32 |
| 2 | 1073 | ø0.63 |
| 3 | 476.7 | ø0.94 |
| 4 | 268.2 | ø1.26 |
| 5 | 171.6 | ø1.57 |



Sketch

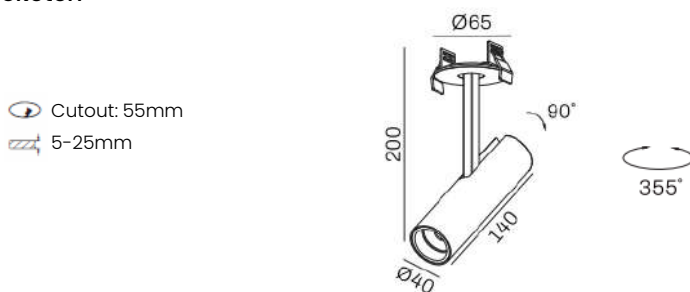

Wetro 40

Semi recessed ultra slim spot;
Very stylish design;
Up to 13watt;

TL-DL-3639

Light Source

12W 930lm, 350mA 3IV, CRI>90, SDCM<2
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White

AB Black

Baffle Finishes

WH Plain White

BK Plain Black

SG Silver Grey

BZ Brushed Bronze

Beam Angle

20° 36° 50°

Light Distribution For 3000K

Spot 21°

Medium 26°

Wide 38°



| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2172 | Ø0.37 |
| 2 | 543.1 | Ø0.75 |
| 3 | 241.4 | Ø1.12 |
| 4 | 135.8 | Ø1.49 |
| 5 | 86.90 | Ø1.87 |


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2478 | Ø0.47 |
| 2 | 619.5 | Ø0.94 |
| 3 | 275.3 | Ø1.41 |
| 4 | 154.9 | Ø1.87 |
| 5 | 99.12 | Ø2.34 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1498 | Ø0.68 |
| 2 | 374.5 | Ø1.36 |
| 3 | 166.4 | Ø2.04 |
| 4 | 93.62 | Ø2.73 |
| 5 | 59.92 | Ø3.41 |



Sketch

 Cutout: 52mm
 5-25mm



Wetro 45

Semi recessed slim spot;
355 degree rotate & 90 degree tilt;
Interchangeable baffle;

TL-DL-3181

Light Source

8W 678lm, 200mA 36V, CRI>90, SDCM<2
LES09

Gear

This product is supplied with LED driver.



Finishes

- AW** White
- AB** Black

Baffle Finishes

- WH** Plain White
- BK** Plain Black
- SG** Silver Grey
- SB** Sand Brass

Beam Angle

- 20°
- 40°
- 60°
- 
- 
- IP21

Light Distribution For 3000K

Wide 38°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 717.5 | Ø0.64 |
| 2 | 179.4 | Ø1.28 |
| 3 | 79.72 | Ø1.93 |
| 4 | 44.84 | Ø2.57 |
| 5 | 28.70 | Ø3.21 |



Cup


Cup series is a vivid “CUP” mounting on the ceiling. Stylish and supplied with various finishings.





Sketch

 Cutout: 62mm
 5-25mm

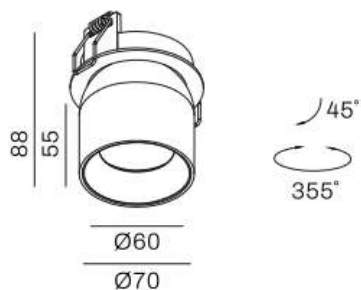

Wetru 62

Single recessed semi spot;
355 degree rotate & 45 degree tilt;
Various finishing options upon request;

TL-DL-3142

Light Source

9W 550lm, 230mA 36V, CRI>90, SDCM<2
LES09

Gear

This product is supplied with LED driver.

Finishes

- AW** White
- AB** Black
- BB** Brushed Brass
- WD** Wood

Beam Angle

- 36°
-   

Baffle Finishes

- WH** Plain White
- BK** Plain Black


Light Distribution For 2700K

Wide 37.7°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1212 | Ø0.68 |
| 2 | 303.0 | Ø1.37 |
| 3 | 134.7 | Ø2.05 |
| 4 | 75.76 | Ø2.73 |
| 5 | 48.49 | Ø3.42 |



Sketch

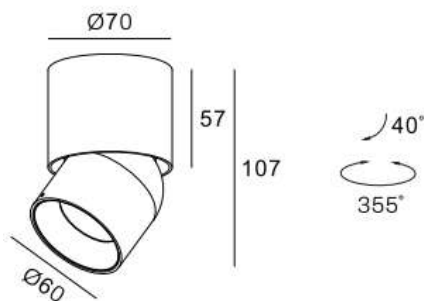

Conica 70

Surface mounting spot;
Built-in on/off driver;
355 degree rotate & 45 degree tilt;
Various finishing options upon request;

TL-SD-3079

Light Source

9W 550lm, 230mA 36V, CRI>90, SDCM<2
LES09

Gear

This product is supplied with LED driver.

Finishes

| | |
|----|---------------|
| AW | White |
| AB | Black |
| BB | Brushed Brass |
| WD | Wood |

Beam Angle

A square icon with rounded corners containing the text "36°".

Baffle Finishes

| | |
|----|-------------|
| WH | Plain White |
| BK | Plain Black |

Light Distribution For 2700K

Wide 37.7°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1212 | Ø0.68 |
| 2 | 303.0 | Ø1.37 |
| 3 | 134.7 | Ø2.05 |
| 4 | 75.76 | Ø2.73 |
| 5 | 48.49 | Ø3.42 |


Scania Surface

Scania surface are a group of surface mounting downlights, combines all the benefits of Scania downlights, and suitable for mounting direct to interior ceiling.






Sketch

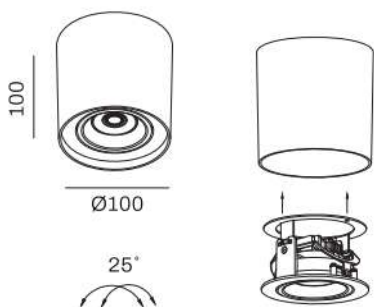

Sketch



Atom 100

Surface mounting spot;
25 degree gimble tilt;
Easy maintenance;

TL-SD-3047

Light Source

9W 500lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with phased-cut
dim power supply.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°
☐ CE IP21

Atom Square 88

Surface mounting spot;
25 degree gimble tilt;
Easy maintenance;

TL-SD-3024

Light Source

9W 500lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with phased-cut
dim power supply.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°
☐ CE IP21

Light Distribution For 3000K Wide 45.5°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1223 | Ø0.84 |
| 2 | 305.8 | Ø1.68 |
| 3 | 135.9 | Ø2.52 |
| 4 | 76.45 | Ø3.36 |
| 5 | 48.93 | Ø4.20 |

Light Distribution For 2700K Wide 45°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 928.4 | Ø0.83 |
| 2 | 232.1 | Ø1.66 |
| 3 | 103.2 | Ø2.49 |
| 4 | 58.03 | Ø3.32 |
| 5 | 37.14 | Ø4.15 |



Sketch

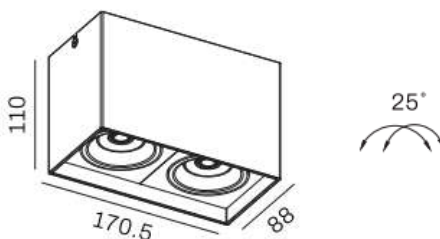

Atom Rectangle 170

Surface mounting spot;
25 degree gimble tilt;
Easy maintenance;

TL-SD-3025

Light Source

2x9W 1000lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09




Gear

This product is supplied with phased-cut
dim power supply.

Finishes

AW White
AB Black


Beam Angle

24° 36° 45°






Light Distribution For 3000K

Medium 43°
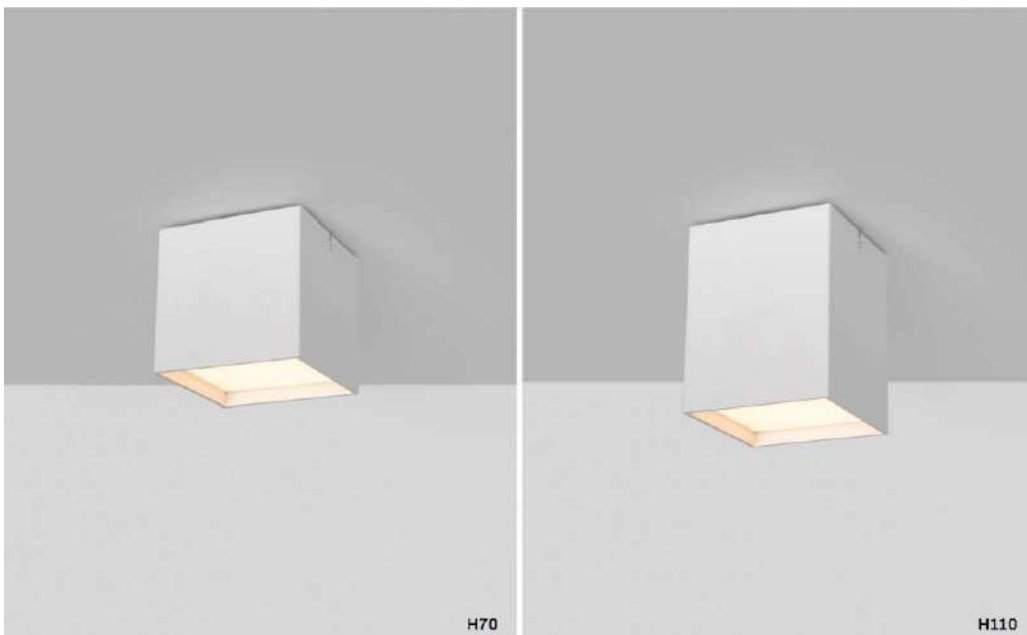
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1947 | Ø0.83 |
| 2 | 486.9 | Ø1.65 |
| 3 | 216.4 | Ø2.48 |
| 4 | 121.7 | Ø3.31 |
| 5 | 77.90 | Ø4.14 |



Sketch



Bull Square 88

Surface mounting spot;
25 degree gimble tilt;
Easy maintenance;

TL-SD-3133

Light Source

10W 518lm, 250mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with phased-cut
dim power supply.

Finishes

AW White
AB Black



Beam Angle

80°





Sketch



Bull Rectangle 170

Square semi recessed downlight;
Slope edge design;
Suitable for various light sources;

TL-SD-3134

Light Source

15W 1100lm, 350mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with phased-cut
dim power supply.

Finishes

AW White
AB Black


Beam Angle

80°





Sketch

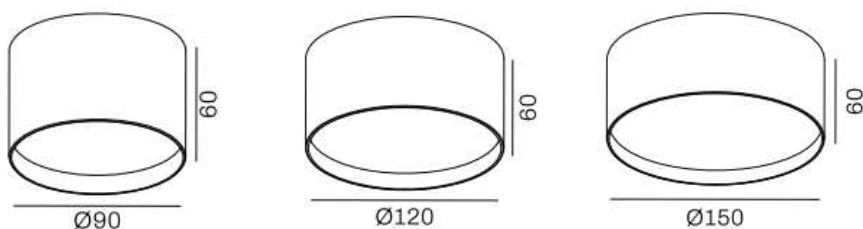

NEW Bull 90

Round diffused surface downlight;
Recessed diffuser;
Soft light;

TL-SD-3159

Light Source

10W 607lm, 250mA 36V, CRI>90, SDCM<3
Osram SMD Chips


Gear

This product is supplied with phased-cut
dim power supply.

Finishes

- AW** White
- AB** Black
- BB** Brushed Brass

Beam Angle



NEW Bull 120

Round diffused surface downlight;
Recessed diffuser;
Soft light;

TL-SD-3160

Light Source

15W 1187lm, 350mA 36V, CRI>90, SDCM<3
Osram SMDs


Gear

This product is supplied with phased-cut
dim power supply.

Finishes

- AW** White
- AB** Black
- BB** Brushed Brass

Beam Angle



NEW Bull 150

Round diffused surface downlight;
Recessed diffuser;
Soft light;

TL-SD-3161

Light Source

15W 1911lm, 350mA 36V, CRI>90, SDCM<3
Osram SMDs


Gear

This product is supplied with on/off LED
drivers, phase-cut din driver available upon
request.

Finishes

- AW** White
- AB** Black
- BB** Brushed Brass

Beam Angle




Compact

Compact surface spots combines a range of classic cylinder spots with minimized body, are suitable for use in various hospitality areas.





Sketch



NEW Conica AC 50

Product for indoor use;
Compact body;
Supplied with driver on board;
IP65 rated;

TL-SD-3115

Light Source

5W 350lm, 230V, CRI>90, SDCM<3
LES06




Gear

This product is supplied with on/off
driver on board.

Finishes

AW White
AB Black

Beam Angle

24° 36° 60°




Light Distribution For 3000K

Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 486.3 | Ø0.68 |
| 2 | 121.6 | Ø1.36 |
| 3 | 54.03 | Ø2.04 |
| 4 | 30.39 | Ø2.72 |
| 5 | 19.45 | Ø3.40 |



Sketch



NEW Orient Fix 80

Surface mount LED downlight for indoor use;
Compact design;

TL-SD-3019

Light Source

7W 450lm, 180mA 37V, CRI>90, SDCM<3
LES06, LES09


Gear

This product is supplied with phase-cut dim power supply.

Finishes

- AW** White
- AB** Black
- BB** Brushed Brass

Beam Angle

- 24° 36°
-   


Light Distribution For 2700K

Medium 38°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1198 | Ø0.67 |
| 2 | 299.6 | Ø1.34 |
| 3 | 133.1 | Ø2.01 |
| 4 | 74.90 | Ø2.68 |
| 5 | 47.93 | Ø3.35 |



Sketch



Conica Fix 80

Surface mounting spot;
Fixed version;
Max IP54 rated;

TL-SD-3015

Light Source

9W 785lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with phase-cut
dim power supply.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°




Light Distribution For 3000K

Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1213 | Ø0.58 |
| 2 | 308.3 | Ø1.16 |
| 3 | 140.3 | Ø1.74 |
| 4 | 79.58 | Ø2.32 |
| 5 | 45.33 | Ø2.90 |



Sketch



Conica Tilt 97

Surface mounting spot;
Adjustable spot;
Easy maintenance;
No visible screws;

TL-SD-3016

Light Source

9W 780lm, 230mA 36V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with phase-cut
dim power supply.

Finishes

AW White
AB Black

Beam Angle

24° 36° 45°



Light Distribution For 3000K

Medium 36°


Wide 47°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1218 | Ø0.65 |
| 2 | 304.6 | Ø1.30 |
| 3 | 135.4 | Ø1.95 |
| 4 | 76.15 | Ø2.60 |
| 5 | 48.74 | Ø3.25 |

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1399 | Ø0.86 |
| 2 | 349.7 | Ø1.73 |
| 3 | 155.4 | Ø2.60 |
| 4 | 78.44 | Ø3.47 |
| 5 | 55.96 | Ø4.34 |



Sketch

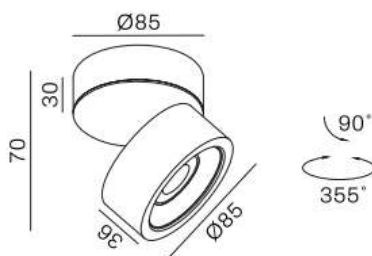

Conica Adjustable 85

Surface mounting;
Adjustable spot;
Compact design;

TL-SD-3114

Light Source

9W 800lm, 230mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with phase-cut
dim power supply.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36° 60°
CE IP21


Light Distribution For 3000K

Wide 46.1°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1304 | Ø0.85 |
| 2 | 326.0 | Ø1.70 |
| 3 | 144.9 | Ø2.55 |
| 4 | 81.49 | Ø3.40 |
| 5 | 52.15 | Ø4.26 |



Sketch



NEW Conica Adjustable
Halo 90

Surface mounting;
Multi directional adjustment;
Compact design;

TL-SD-3151

Light Source
10W 780lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear
This product is supplied with on/off
power supply.

Finishes

AW White
AB Black

Beam Angle


15° 25° 38° 60°
CE IP20

Light Distribution For 3000K
Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 917.2 | Ø0.58 |
| 2 | 229.3 | Ø1.17 |
| 3 | 101.9 | Ø1.76 |
| 4 | 57.30 | Ø2.34 |
| 5 | 36.70 | Ø2.98 |



Sketch

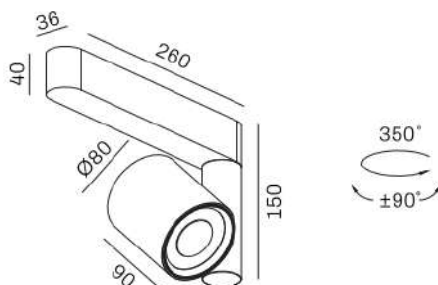

Conica Multi 260

Surface mounting spot;
Stylish design;
Multiple installation on wall or ceiling;

TL-SD-3124

Light Source

12W 1100lm, 300mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with on/off
power supply.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36° 60°
CE IP21

Light Distribution For 3000K

Wide 31.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2862 | ø0.56 |
| 2 | 715.6 | ø1.12 |
| 3 | 318.0 | ø1.68 |
| 4 | 178.9 | ø2.24 |
| 5 | 114.5 | ø2.79 |

Pendants


A collection of simple pendants, with functional and classic design, covers a wide power range, and very easy to use.

PENDANTS





Sketch



Flexa Spot 80

Deep recessed luminaire;
Fixed pendant design;

TL-PL-3005

Light Source

9W 650lm, 230mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with phase-cut
dimmable power supply.

Finishes

AW White
AB Black

Beam Angle


24° 36° 45°




Light Distribution For 3000K

Medium 36.6°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1150 | Ø0.66 |
| 2 | 287.5 | Ø1.33 |
| 3 | 127.8 | Ø1.99 |
| 4 | 71.87 | Ø2.65 |
| 5 | 46.00 | Ø3.32 |

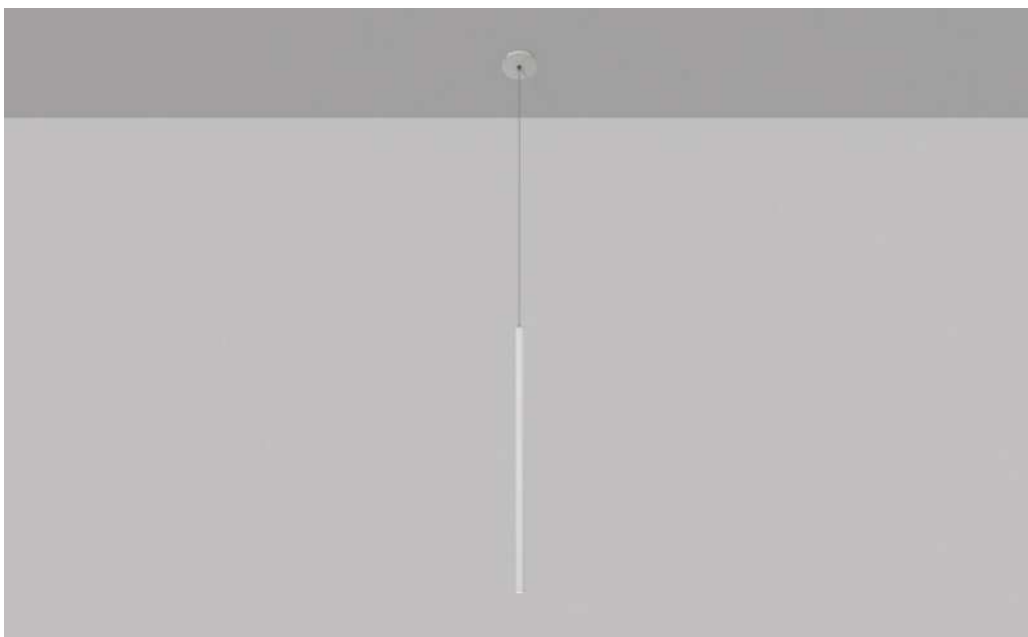

Sketch



Merlin Spot 25

Micro spot;
Very slim leads with steel wire;

TL-PL-0028

Light Source

6W 300lm, 150mA 36V, CRI>90, SDCM<3
LES03




Gear

This product is supplied with phase-cut
dimmable power supply.

Finishes

AW White
AB Black

Beam Angle

15° 38°






Sketch



Merlin Spot 45

Tubular spots;
Very slim design;

TL-PL-3007

Light Source

5W 250lm, 500mA 9V, CRI>90, SDCM<3
LES06




Gear

This product is supplied with phase-cut
dimmable power supply.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°




Light Distribution For 3000K

Spot 13°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3033 | Ø0.22 |
| 2 | 758.4 | Ø0.44 |
| 3 | 337.1 | Ø0.67 |
| 4 | 189.6 | Ø0.89 |
| 5 | 121.3 | Ø1.12 |

Medium 19°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1487 | Ø0.33 |
| 2 | 371.8 | Ø0.66 |
| 3 | 165.2 | Ø1.00 |
| 4 | 92.94 | Ø1.33 |
| 5 | 59.48 | Ø1.66 |

Wide 35°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 621.9 | Ø0.60 |
| 2 | 155.5 | Ø1.20 |
| 3 | 69.10 | Ø1.80 |
| 4 | 38.87 | Ø2.40 |
| 5 | 24.88 | Ø3.01 |



Sketch



Merlin Drop 45

Suspended tubular pendant;
Colored PMMA top;
Ling slim design;

TL-PL-3006

Light Source

5W 200lm, 500mA 9V, CRI>90, SDCM<3
LES06

Gear


This product is supplied with LED driver.

Finishes


- AW** White
AB Black

Beam Angle

- Flood
III
CE
IP21

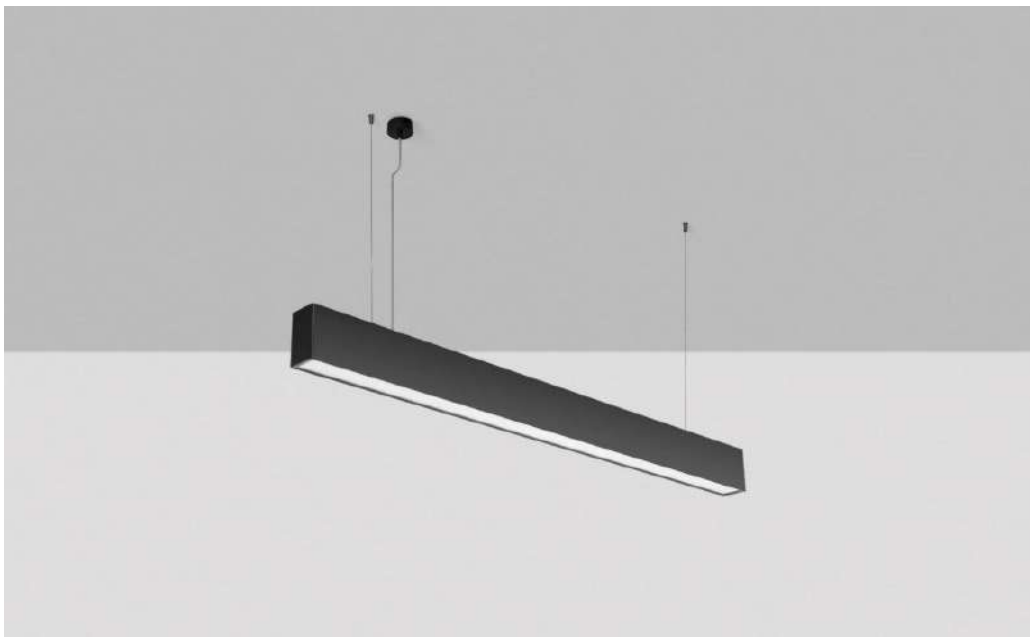

Sketch

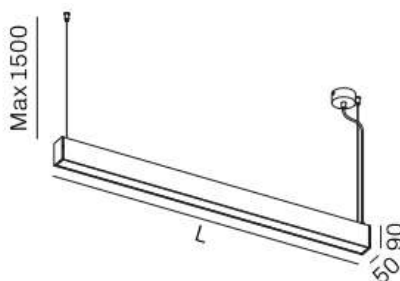

Mirage Linear 1200

Suspended linear for office or table;
Linkable;
Built-in power supply;

TL-PL-3031

Light Source

40W 2700lm, 1050mA 36V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with built-in
power supply. DALI, 0-10V, phase-cut
driver available upon request.

Finishes



AW White
AB Black

Beam Angle

100°
III
CE
IP21



Sketch

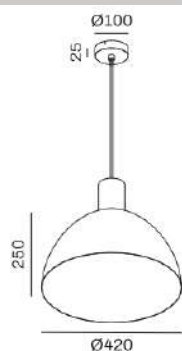

Mirage Spot 80

Ultra slim tubular spot;
Add on low glare shield;
35watt rated power;

TL-PL-3030

Light Source

35W 2950lm, 800mA 36V, CRI>90, SDCM<3
LES013

Gear

This product is supplied with built-in driver
or in-track power adaptor.

Accessories

Inner white lamp shield

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°

Light Distribution For 3000K

Medium 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 9251 | ø0.42 |
| 2 | 2313 | ø0.85 |
| 3 | 1028 | ø1.27 |
| 4 | 578.2 | ø1.70 |
| 5 | 370.0 | ø2.12 |



Sketch



Carlton Spot 80

Up & down pendant spots;
Compact body design with built-in driver;
Flat ceiling rose;

TL-PL-3026

Light Source

5W 975lm, 500mA 9V (upshine), CRI>90, SDCM<3
High power LEDs
230mA 36V (downshine), CRI>90, SDCM<3
LES09

Gear

This product is supplied with phase-cut dimmable power supply.

Finishes

AW White
AB Black


Beam Angle

15° 24° 36°
☉ CE IP21

Light Distribution For 3000K

Wide 32°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1409 | ø0.57 |
| 2 | 352.3 | ø1.14 |
| 3 | 156.6 | ø1.70 |
| 4 | 88.06 | ø2.27 |
| 5 | 56.36 | ø2.83 |

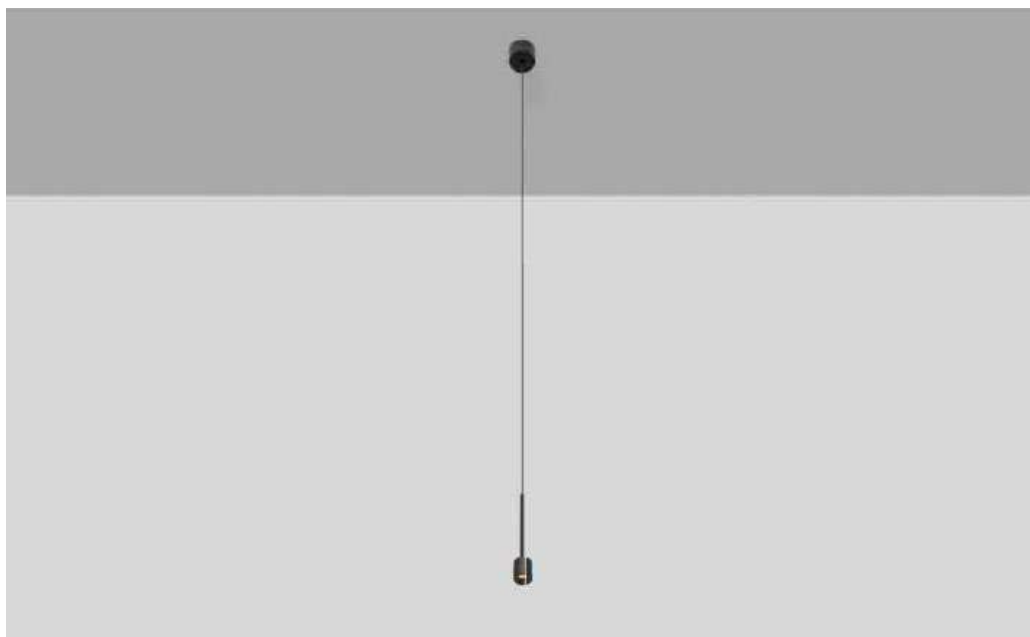

Sketch



Birgit 30

Micro spot;
Very slim leads with steel wire;

TL-PL-3033

Light Source

3W 140lm, 700mA 3V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with phase-cut
dimmable power supply.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°
CE IP21

Light Distribution For 2700K

Spot 18°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 551.1 | Ø0.44 |
| 2 | 137.8 | Ø0.88 |
| 3 | 61.23 | Ø0.97 |
| 4 | 34.44 | Ø1.30 |
| 5 | 22.04 | Ø1.62 |

Medium 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 402.4 | Ø0.44 |
| 2 | 100.6 | Ø0.88 |
| 3 | 44.71 | Ø1.31 |
| 4 | 25.15 | Ø1.75 |
| 5 | 16.09 | Ø2.19 |



Sketch



Spill Jet

Lab drop with jet aperture;
Focus light;
Low glare;

TL-PL-3059

Light Source

7W 445lm, 350mA 18V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with phase-cut
or DALI driver.

Finishes

AW White
AB Black

Beam Angle


24° 38°



Light Distribution For 2700K

Wide 38°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1052 | Ø0.68 |
| 2 | 262.9 | Ø1.37 |
| 3 | 116.9 | Ø2.05 |
| 4 | 65.74 | Ø2.74 |
| 5 | 42.07 | Ø3.43 |

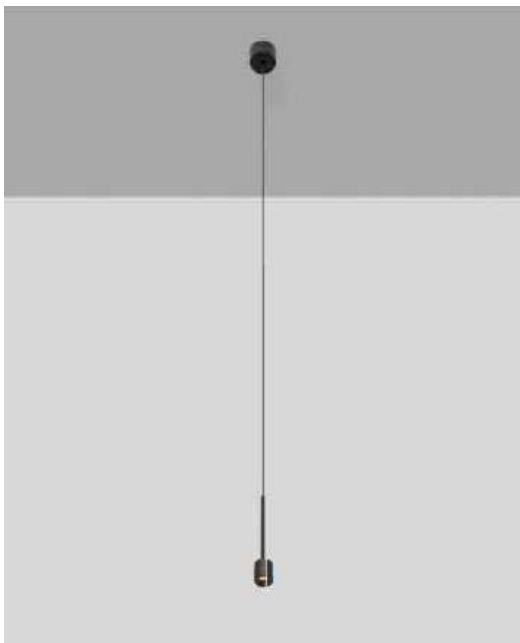

Sketch



Sketch



NEW Spill Cone

3 different glass drops;
3 different lamp shield available
upon request;
Even light distribution;

TL-PL-3023

Light Source

7W 385lm, 350mA 18V, CRI>90, SDCM<3
LES06


Gear

This product is supplied with phase-cut
or DALI driver.

Finishes

AW White
AB Black

Beam Angle



NEW Spill Ball

3 different glass drops;
3 different lamp shield available
upon request;
Even light distribution;

TL-PL-3024

Light Source

7W 385lm, 350mA 18V, CRI>90, SDCM<3
LES06


Gear

This product is supplied with phase-cut
or DALI driver.

Finishes

AW White
AB Black

Beam Angle





Sketch



NEW Spill Tube

3 different glass drops;
3 different lamp shield available
upon request;
Even light distribution;

TL-PL-3025

Light Source

7W 385lm, 350mA 18V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with phase-cut
or DALI driver.

Finishes

AW White
AB Black



Beam Angle

Flood





Sketch

 Cutout: 55mm
 5-25mm



NEW Flexa Kit 55

Recessed kit for pendant;
 Max. payload 10kgs;
 Supplied with cable restrain;

TL-PL-3635

Material
 Aluminum + Press steel

Cord Type
 Round

Max Cord Diameter
 Ø8mm

Finishes


AW White
AB Black

Beam Angle

CE **IP21**

Track


Track lights play a very important role in Lux Luci's product range. They are easy to use, easy to maintain, and with our great passion into most simplified designs.

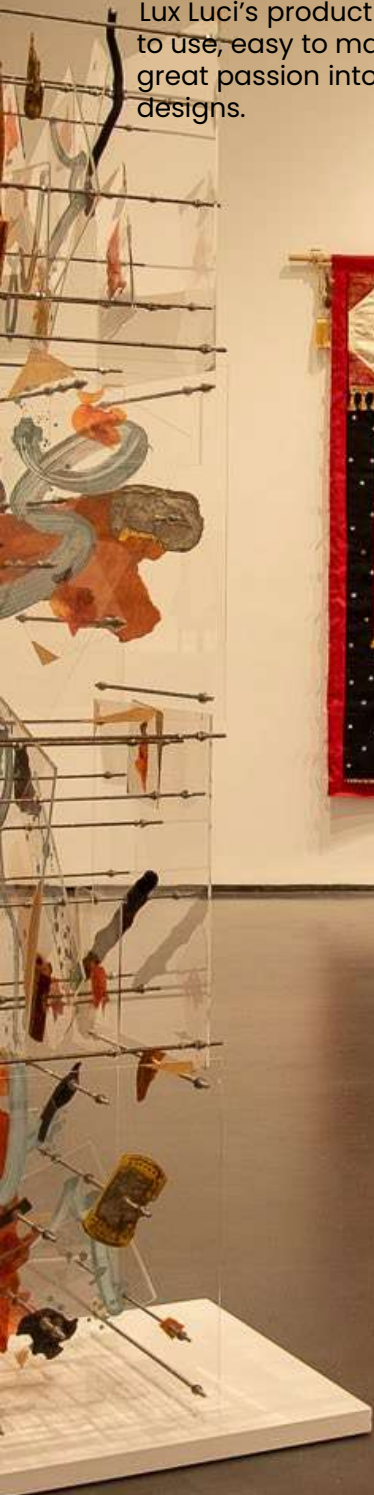

TRACK



Sketch



NEW Mick AC 40

DOB triac dimmable;
Single phase adaptor;
Compact size;
Fix design;

TL-TR-3053

Light Source
5W 305lm, 230V, CRI>90, SDCM<2
LES06

Gear
This product is supplied with driver
on board.

Finishes

- AW White
- AB Black
- BR Brass
- WD Wood

Beam Angle


- 36°
- 45°
-
-
- IP20

Light Distribution For 3000K
Medium 40°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 512.8 | Ø0.75 |
| 2 | 128.2 | Ø1.50 |
| 3 | 56.98 | Ø2.25 |
| 4 | 32.00 | Ø3.00 |
| 5 | 20.50 | Ø3.76 |



Sketch



NEW Oblo AC 50

DOB triac dimmable;
Single phase adaptor;
Compact size;
Fix design;

TL-TR-3054

Light Source

6W 483lm, 230V, CRI>90, SDCM<2
LES09

Gear

This product is supplied with driver
on board.

Finishes

- AW** White
- AB** Black
- BR** Brass

Beam Angle

- 36° 45°
- CE IP20


Light Distribution For 3000K

Medium 25°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1730 | Ø0.44 |
| 2 | 432.6 | Ø0.88 |
| 3 | 192.3 | Ø1.33 |
| 4 | 108.1 | Ø1.77 |
| 5 | 69.20 | Ø2.22 |



Sketch

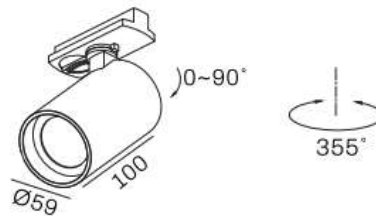

NEW Clea AC 60L

230V driver on board;
Phase-cut dimmable;
Single phase adaptor;
Compact design;

TL-TR-3055

Light Source

8W 850lm, 230V, CRI>90, SDCM<2
LES09

Gear

This product is supplied with driver
on board.

Finishes

| | |
|----|-------|
| AW | White |
| AB | Black |
| BR | Brass |

Beam Angle

| | | |
|-----|-----|--|
| 24° | 36° | |
| | | |


Light Distribution For 3000K

Medium 37°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1173 | Ø0.67 |
| 2 | 293.4 | Ø1.34 |
| 3 | 130.4 | Ø2.01 |
| 4 | 73.34 | Ø2.68 |
| 5 | 46.94 | Ø3.35 |



Sketch

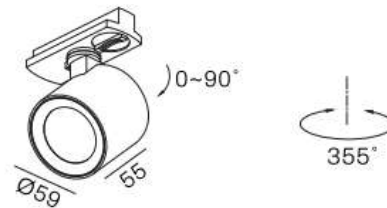

NEW Clea AC 60

230V driver on board;
Phase-cut dimmable;
Single phase adaptor;
Compact design;

TL-TR-3056

Light Source
8W 560lm, 230V, CRI>90, SDCM<2
LES09

Gear
This product is supplied with driver
on board.

Finishes

| | |
|----|-------|
| AW | White |
| AB | Black |
| BR | Brass |

Beam Angle


| | | |
|-----|-----|--|
| 24° | 36° | |
| | | |

Light Distribution For 3000K
Medium 38°

| h(m) | E(lx) | Ø(m) |
|------|-------|-------|
| 1 | 840.3 | Ø0.70 |
| 2 | 210.1 | Ø1.40 |
| 3 | 93.37 | Ø2.11 |
| 4 | 52.52 | Ø2.81 |
| 5 | 33.61 | Ø3.51 |



Sketch

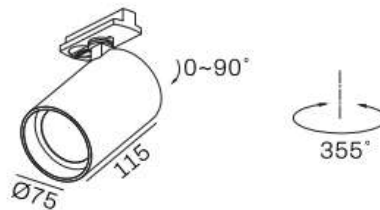

NEW Clea AC 75

230V driver on board;
Phase-cut dimmable;
Single phase adaptor;
Compact design;

TL-TR-3057

Light Source

18W 977lm, 220-240V, CRI>90, SDCM<2
LES013

Gear

This product is supplied with driver
on board.

Finishes

| | |
|----|-------|
| AW | White |
| AB | Black |
| BR | Brass |

Beam Angle

| | | |
|---|---|---|
| 24° | 36° | |
|  |  |  |


Light Distribution For 3000K

Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2672 | Ø0.64 |
| 2 | 668.1 | Ø1.28 |
| 3 | 296.9 | Ø1.92 |
| 4 | 167.0 | Ø2.56 |
| 5 | 106.9 | Ø3.21 |



Sketch

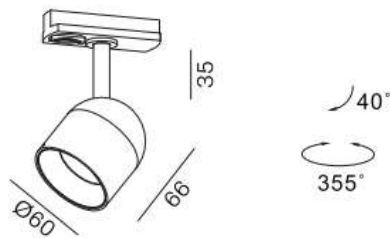

NEW Dove AC 60

DOB triac dimmable;
Cup design;
Multiple color options;

TL-TR-3071

Light Source
8W 670lm, 230V, CRI>90, SDCM<2
LES09

Gear
This product is supplied with driver
on board.

Finishes


| | |
|----|-------|
| AW | White |
| AB | Black |
| BR | Brass |
| WD | Wood |

Beam Angle

| | | |
|-----|-----|------|
| 24° | 36° | |
| | CE | IP21 |



Sketch

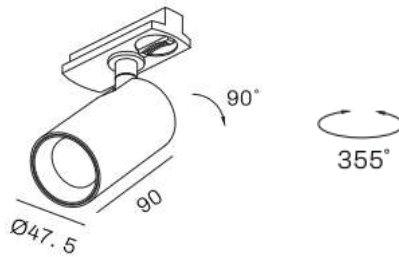

Tano AC 45

Mini track mount spot;
Driver on board;
Dimming with most trailing edge dimmers;
Various finishing options;

TL-TR-3006

Light Source
8W 340lm, 230V, CRI>90, SDCM<2
LES09

Gear
This product is supplied with driver
on board.

Finishes

| | |
|----|-------|
| AW | White |
| AB | Black |
| BR | Brass |
| WD | Wood |

Beam Angle


| | | | |
|-----|-----|-----|-----|
| 17° | 24° | 38° | 60° |
| | | | |

Light Distribution For 2700K Medium 35.6°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 695.5 | Ø0.64 |
| 2 | 173.9 | Ø1.28 |
| 3 | 77.28 | Ø1.93 |
| 4 | 43.47 | Ø2.57 |
| 5 | 27.82 | Ø3.21 |



Sketch

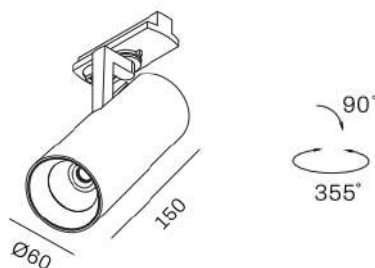

Tano AC 60

Mini track mount spot;
Driver on board;
Dimming with most trailing edge dimmers;
Various finishing options;

TL-TR-3007

Light Source

15W 950lm, 230V, CRI>90, SDCM<2
LES09

Gear



This product is supplied with driver
on board.

Finishes

AW White
AB Black

Beam Angle

24° 38° 60°


Light Distribution For 3000K

Medium 37.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1700 | Ø0.64 |
| 2 | 425 | Ø1.28 |
| 3 | 188.9 | Ø1.93 |
| 4 | 106.2 | Ø2.57 |
| 5 | 68.00 | Ø3.21 |



Sketch

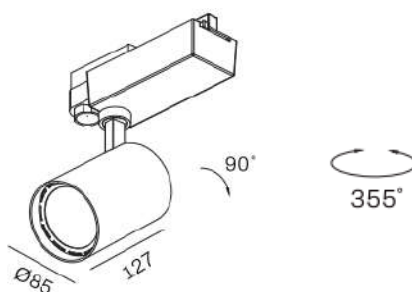

Clea 85

LED track spot;
Remote gear box;

TL-TR-3001

Light Source

35W 2600lm, 800A 36V, CRI>90, SDCM<2
LES013




Gear

This product is supplied with built-in
on/off power supply.

Finishes

AW White
AB Black

Beam Angle

24° 36° 60°





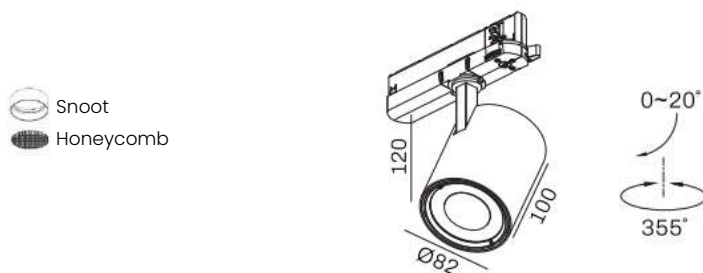
Light Distribution For 3000K

Medium 21°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 9251 | Ø0.42 |
| 2 | 2313 | Ø0.85 |
| 3 | 1028 | Ø1.27 |
| 4 | 578.2 | Ø1.70 |
| 5 | 370.0 | Ø2.12 |



Sketch



NEW Trilly 82

Track light for indoor use;
Low glare multiple lens;
3 Phase adaptor with dimming switch;
Suitable for illuminating jewelry, watches
& luxury articles;

Light Source

20W 2700lm, 700mA 27V, CRI>90, SDCM<2
High power LEDs


Gear

This product is supplied with power
in track.

Finishes

AW White
AB Black

Beam Angle



TL-TR-3051

Light Distribution For 3000K

Spot 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 11980 | Ø0.42 |
| 2 | 2995 | Ø0.84 |
| 3 | 1331 | Ø1.26 |
| 4 | 748.7 | Ø1.68 |
| 5 | 479.2 | Ø2.10 |

Medium 38°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 5783 | Ø0.72 |
| 2 | 1446 | Ø1.45 |
| 3 | 642.5 | Ø2.17 |
| 4 | 361.4 | Ø2.89 |
| 5 | 231.3 | Ø3.62 |

Wide 60°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2078 | Ø1.42 |
| 2 | 519.5 | Ø2.83 |
| 3 | 230.9 | Ø4.25 |
| 4 | 129.9 | Ø5.67 |
| 5 | 83.12 | Ø7.09 |



Sketch



NEW Koala 97

Track light for indoor use;
Low glare multiple lens;
3 Phase adaptor with dimming switch;
Suitable for illuminating jewelry, watches
& luxury articles;

TL-TR-3077

Light Source

20W 1464lm, 700mA 27V, CRI>90, SDCM<2
High power LEDs

Gear

This product is supplied with power
in track.

Finishes

AW White
AB Black

Beam Angle

15° 24° 36° 60°
□ □ □ □
CE IP21


Light Distribution For 4000K

Medium 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3321 | Ø0.47 |
| 2 | 830.3 | Ø0.94 |
| 3 | 369.0 | Ø1.42 |
| 4 | 207.6 | Ø1.89 |
| 5 | 132.8 | Ø2.37 |



Sketch



Boleto 70

Track spot with zoom lens;
Compact body design;

TL-TR-3023

Light Source

15W 945lm, 350mA 36V, CRI>90, SDCM<2
LES09

Gear

This product is supplied with built-in
on/off power supply.

Finishes

AW White
AB Black

Beam Angle

15-60°
CE IP21

Light Distribution For 3000K

Spot 17.6°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 7915 | Ø0.31 |
| 2 | 1979 | Ø0.62 |
| 3 | 879.5 | Ø0.93 |
| 4 | 494.7 | Ø1.24 |
| 5 | 316.6 | Ø1.55 |

Medium 36°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2997 | Ø0.65 |
| 2 | 749.2 | Ø1.30 |
| 3 | 333.0 | Ø1.95 |
| 4 | 187.3 | Ø2.60 |
| 5 | 119.9 | Ø3.25 |

Wide 57.1°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1396 | Ø1.09 |
| 2 | 349.0 | Ø2.18 |
| 3 | 155.1 | Ø3.26 |
| 4 | 87.25 | Ø4.35 |
| 5 | 55.84 | Ø5.44 |



Sketch

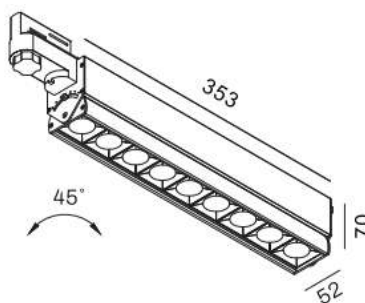

Bruco Washer 350

35°x70 degree wall washer;
3 phase track mounting adaptor;
Built-in on/off power supply;

TL-TR-3012

Light Source

36W 932lm, 1.2A 30V, CRI>90, SDCM<2
SMD5050

Gear

This product is supplied with built-in
on/off power supply.

Finishes

AW White
AB Black

Beam Angle

45x75°
CE IP21

Light Distribution For 3000K

Flood 45x75°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 4412 | ø0.79 |
| 2 | 1103 | ø1.59 |
| 3 | 490.3 | ø2.39 |
| 4 | 275.8 | ø3.19 |
| 5 | 176.5 | ø3.99 |


Low Voltage Track

Track lights play a very important role in Lux Luci's product range. They are easy to use, easy to maintain, and with our great passion into most simplified designs.

LOW VOLTAGE TRACK



Sketch

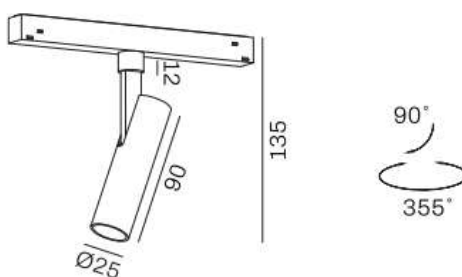

NEW Avro LV 25

Mini spot;
Single spot for low voltage track;

TL-TR-3086

Light Source

7W 400lm, 150mA 36V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with 48V built-in
on/off power supply;
DALI adaptor available upon request.

Finishes

AW White
AB Black

Beam Angle

18° 30° 60°
III CE IP21


Light Distribution For 2700K

Spot 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1639 | Ø0.41 |
| 2 | 409.8 | Ø0.83 |
| 3 | 182.1 | Ø1.24 |
| 4 | 102.5 | Ø1.66 |
| 5 | 61.6 | Ø2.07 |



Sketch

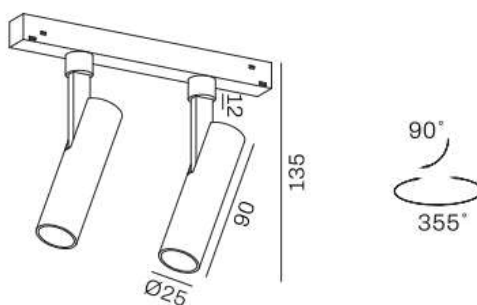

NEW Avro Twin LV 25

Twin spots;
Mini spot for low voltage track;

TL-TR-3087

Light Source

13W 800lm, 300mA 36V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with 48V built-in
on/off power supply;
DALI adaptor available upon request.

Finishes

AW White
AB Black

Beam Angle

18° 30° 60°
III CE IP21


Light Distribution For 2700K

Spot 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1639 | ø0.41 |
| 2 | 409.8 | ø0.83 |
| 3 | 182.1 | ø1.24 |
| 4 | 102.5 | ø1.66 |
| 5 | 61.6 | ø2.07 |



Sketch

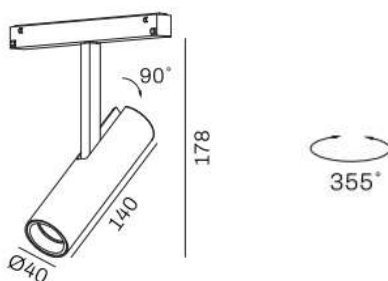

Mirage Slim LV 40

Slimline 13W spot;
48V magnet power-in-track adaptor;

TL-TR-3052

Light Source

13W 800lm, 300mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with 48V built-in
on/off power supply;
DALI adaptor available upon request.

Finishes

AW White
AB Black

Beam Angle

20° 30° 40°
III CE IP21

Light Distribution For 3000K

Spot 21°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2172 | Ø0.37 |
| 2 | 543.1 | Ø0.75 |
| 3 | 241.4 | Ø1.12 |
| 4 | 135.8 | Ø1.49 |
| 5 | 86.90 | Ø1.87 |

Medium 26°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2478 | Ø0.47 |
| 2 | 619.5 | Ø0.94 |
| 3 | 275.3 | Ø1.40 |
| 4 | 154.9 | Ø1.87 |
| 5 | 99.12 | Ø2.34 |

Wide 38°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1498 | Ø0.68 |
| 2 | 374.5 | Ø1.36 |
| 3 | 166.4 | Ø2.04 |
| 4 | 93.62 | Ø2.72 |
| 5 | 59.92 | Ø3.41 |



Sketch



Dia LV 200

48V blade washer;
10W rated power;
Low glare and even washer effect;

TL-TR-3022

Light Source

10W 500lm, 700mA 15V, CRI>90, SDCM<3
Osram Oslon Square

Gear

This product is supplied with 48V built-in
on/off power supply;
DALI adaptor available upon request.

Finishes

AW White
AB Black


Beam Angle

36°
III
CE
IP21


Light Distribution For 3000K

Medium 37°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1494 | Ø0.64 |
| 2 | 373.5 | Ø1.29 |
| 3 | 166.0 | Ø1.94 |
| 4 | 93.37 | Ø2.58 |
| 5 | 59.76 | Ø3.23 |

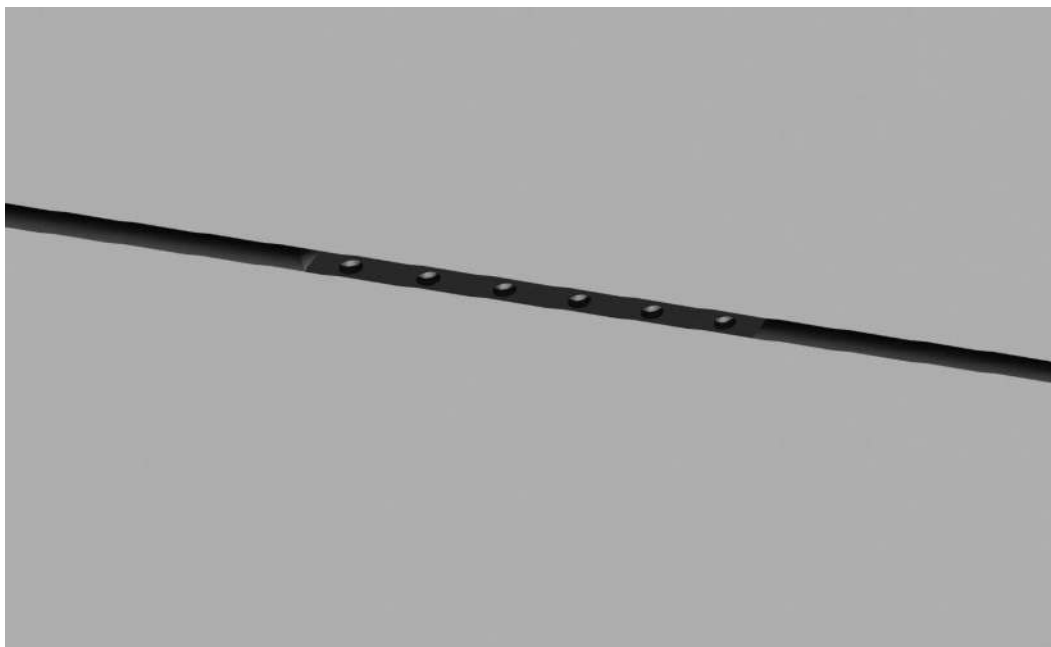

Sketch

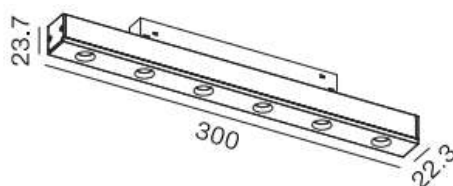

Satori LV 300

Multi spots with mini reflector;
Low glare design;

TL-TR-3066

Light Source

13W 750lm, 700mA 18V, CRI>90, SDCM<3
High power LEDs

Gear

This product is supplied with 48V built-in
on/off power supply;
DALI adaptor available upon request.

Finishes

AW White
AB Black


Beam Angle

15° 38°
III CE IP21


Light Distribution For 3000K

Medium 38°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2294 | Ø0.42 |
| 2 | 573.0 | Ø0.83 |
| 3 | 254.0 | Ø1.25 |
| 4 | 143.0 | Ø1.67 |
| 5 | 91.00 | Ø2.09 |

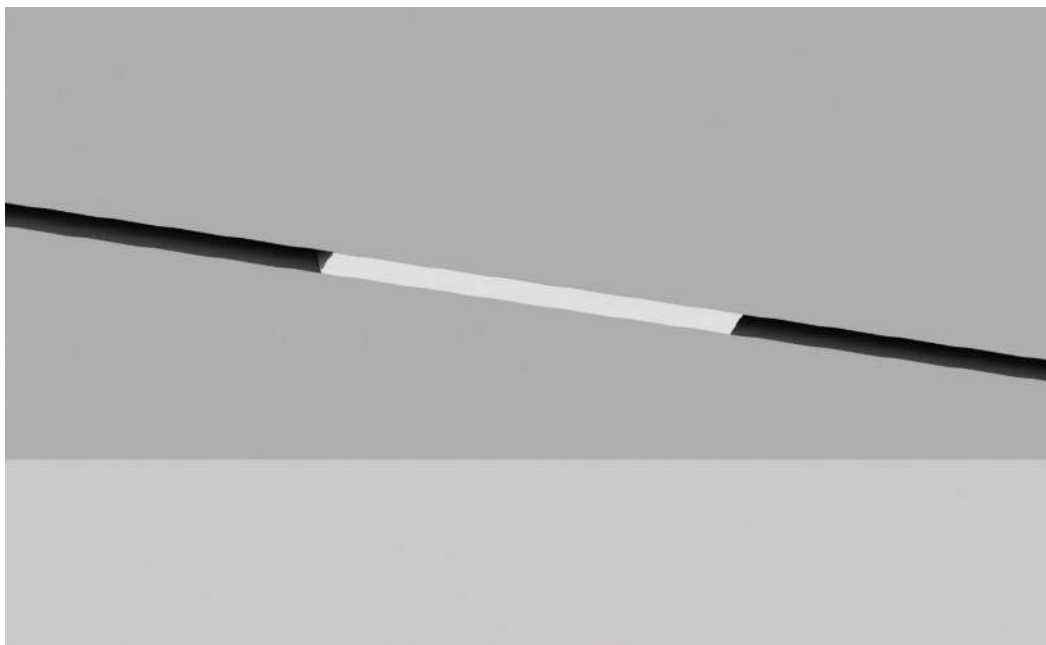

Sketch

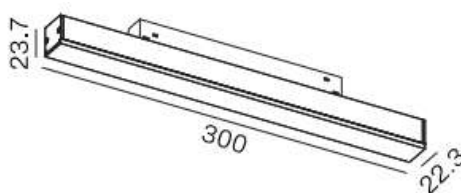

Bruco Diffused LV 300

Diffused light;
Trimless design;
Suitable for use with 48V magnetic
track system;

TL-TR-3067

Light Source

15W 370lm, 350mA 36V, CRI>90, SDCM<3
SMD LEDs

Gear


This product is supplied with 48V built-in
on/off power supply;
DALI adaptor available upon request.

Finishes


AW White
AB Black

Beam Angle

Flood
III
CE
IP21

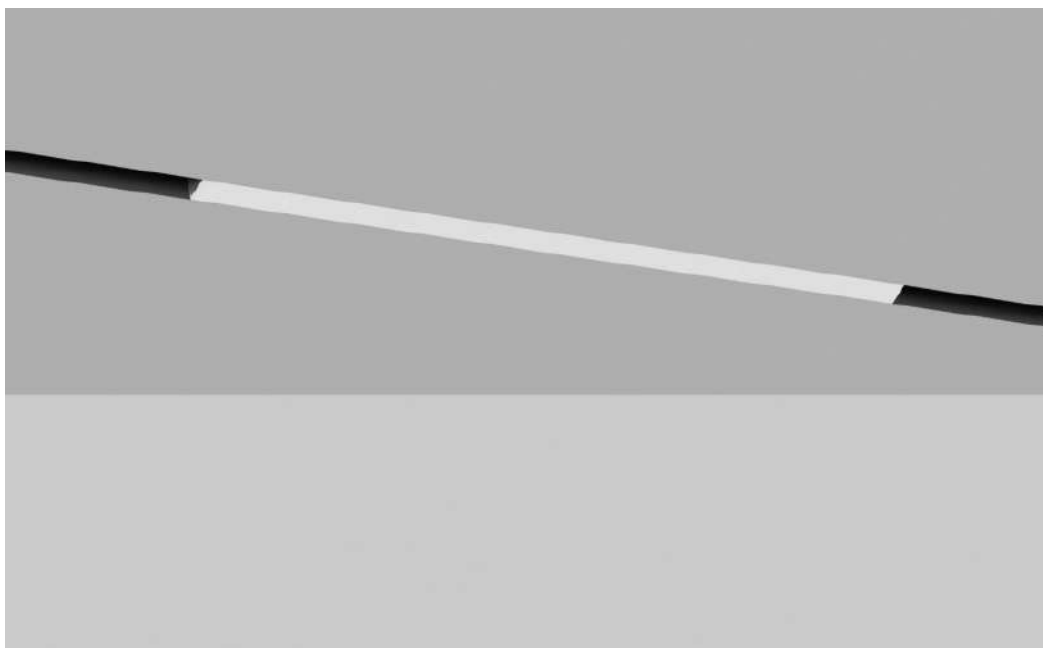

Sketch

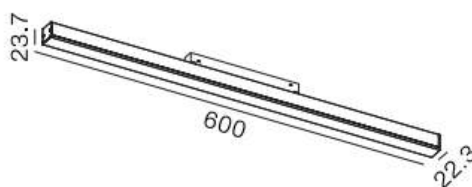

Bruco Diffused LV 600

Diffused light;
Trimless design;
Suitable for use with 48V magnetic
track system;

TL-TR-3070

Light Source

30W 480lm, 700mA 36V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with 48V built-in
on/off power supply;
DALI adaptor available upon request.

Finishes


AW White
AB Black

Beam Angle

Flood
III
CE
IP21



Sketch



Merlin Spot LV 800

Ultra slim body;
2watt spot;
Suitable for use with 48V magnetic track
system;

TL-TR-3068

Light Source

3W 80lm, 700mA 3V, CRI>90, SDCM<3
High power LED

Gear


This product is supplied with 48V built-in
on/off power supply;
DALI adaptor available upon request.

Finishes


AW White
AB Black

Beam Angle

20° 30° 50°
III CE IP21

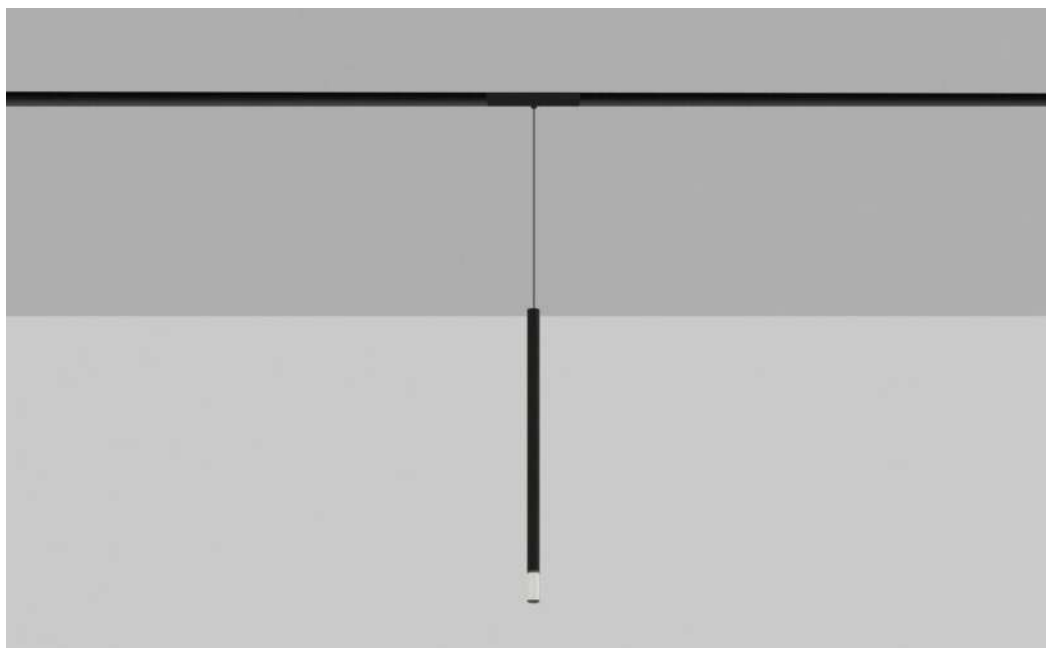

Sketch



Merlin Drop LV 800

Ultra slim body;
6cm acrylic crystal drop;

TL-TR-3069

Light Source

3W 80lm, 700mA 3V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with in-track
power adaptor.

Finishes

AW White
AB Black

Beam Angle

Flood
III
CE
IP21


Wall Luminaires

Wall lights as the auxiliary lighting mainly for decorative purpose, are usually installed on the indoor wall. The wall range lighting is quietly elegant and harmonious, which adorn the environment with elegance and rich beauty.





Sketch



NEW Merlin 90

Stylish wall light for indoor use;
Available in up & down and single
downshine version;
Compact body design;

TL-WL-3175

Light Source

6W 480lm, 700mA 9V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with on/off
phase-cut dimming driver.

Finishes

AW White
AB Black


Beam Angle

36°





Sketch



NEW Grillo 110

Compact design;
Diffused wall light;
Flicker free phase-cut dimming;

TL-WL-3164

Light Source

6W 340lm, 230V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with driver
on-board.

Finishes

AW White
AB Black


Beam Angle




Light Distribution For 3000K

Wide 78°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 99.27 | Ø1.62 |
| 2 | 24.82 | Ø3.25 |
| 3 | 11.03 | Ø4.87 |
| 4 | 6.204 | Ø6.50 |
| 5 | 3.971 | Ø8.12 |

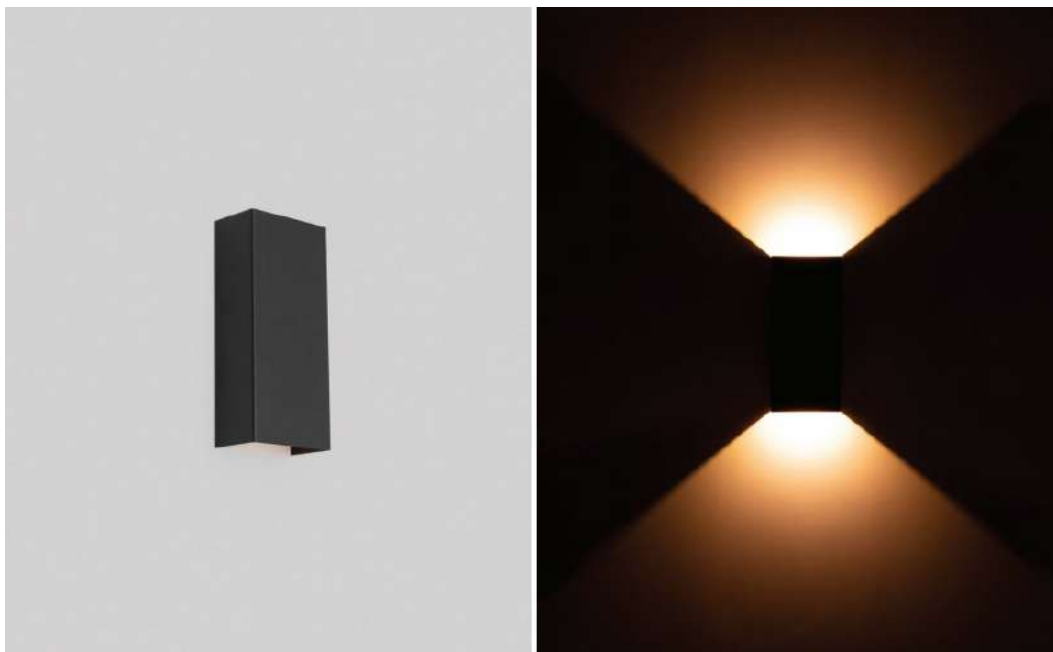

Sketch



Pulce 200

U & down brick wall light;
Sharp beam curve;

TL-WL-3071

Light Source

2x3W 400lm, 350mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with phase-cut
dimming driver.


Accessories


1.8m prewired on cord dimmer

Finishes


AW White
AB Black

Beam Angle



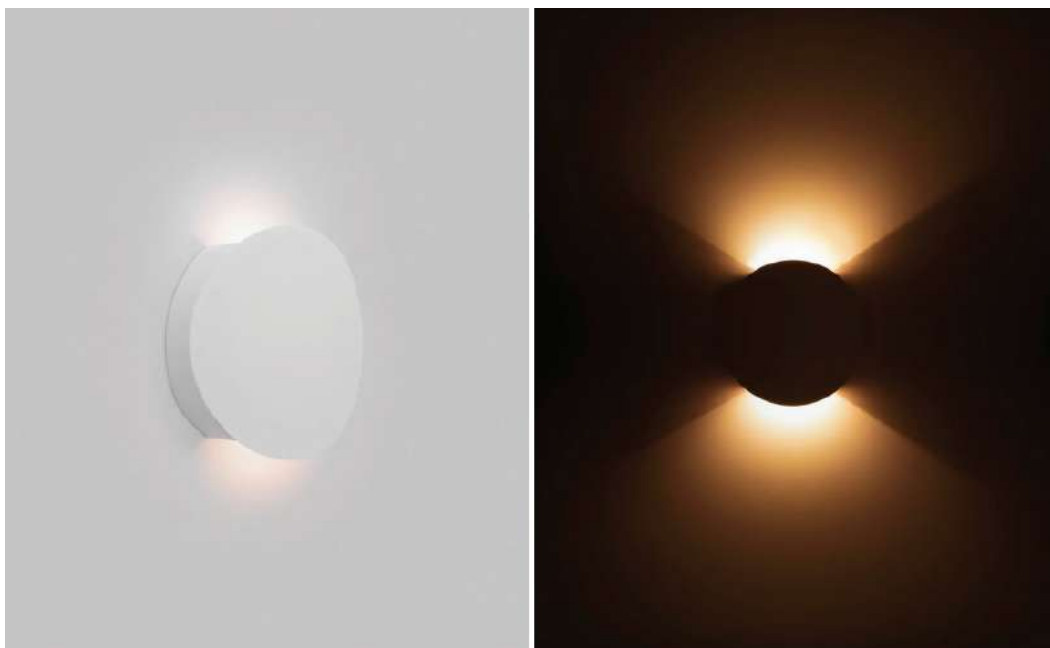

Sketch



Civetta 240

Up & down cylinder wall light;
Sharp beam curve;
30 watt high power rated;

TL-WL-3086

Light Source

30W 2400lm, 700mA 36V, CRI>90, SDCM<2
LES013

Gear

This product is supplied with on/off or
DALI dimming driver.

Finishes



AW White
AB Black

Beam Angle






Sketch

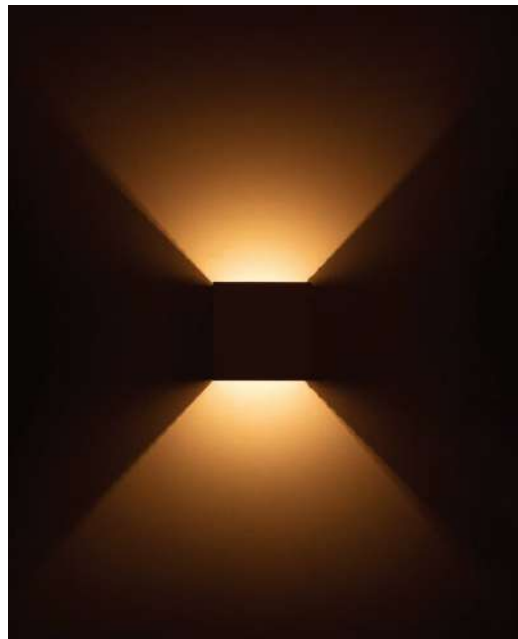

Sketch



Regolo 60

Cubic wall light;
No visual screws;

TL-WL-3087

Light Source

6W 400lm, 180mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with on/off
power supply.

Finishes

AW White
AB Black

Beam Angle



Regolo 100

Cubic wall light;
Supplied with cable outlet on the base;
No visual screws;

TL-WL-3104

Light Source

7W 400lm, 350mA 18V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with phase-cut
dimming adaptor.


Accessories

1.8m prewired on cord dimmer;

Finishes


AW White
AB Black

Beam Angle






Sketch



Sketch

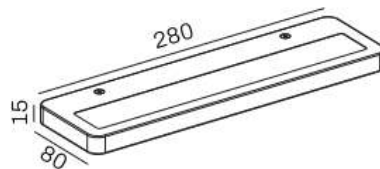

Salina 220

Paddle shape wall light;
Up light;
Ultra slim with round corner;
Driver on board;
Dimmable;

Light Source

20W 1477lm, 230V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with driver
on-board.

Finishes

AW White
AB Black

Beam Angle



TL-WL-3123

Salina 280

Paddle shape wall light;
Up light;
Ultra slim with round corner;
Driver on board;
Dimmable;

Light Source

30W 2000lm, 230V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with driver
on-board.


Finishes

AW White
AB Black


Beam Angle



TL-WL-3124

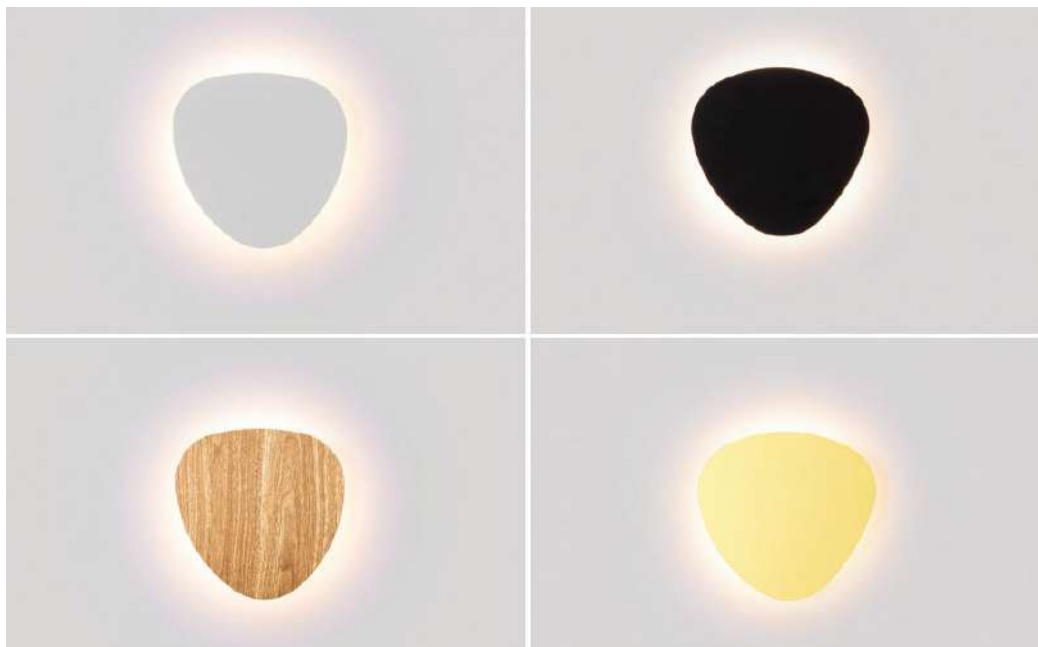

Sketch

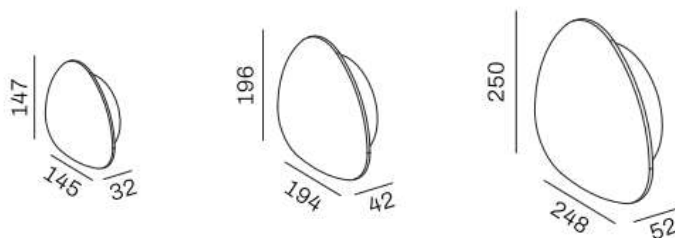

Kite 145/194/248

Delta shape wall light with difference sizes;
Wall light for decorative purpose;
Max IP65;

**TL-WL-3125/TL-WL-3126/
TL-WL-3127**

Light Source

10W 500lm/15W 800lm/20W 1000lm,
250/350/5000mA 36V, CRI>90, SDCM<3
SMD LEDs

Gear


This product is supplied with on/off or
phase-cut dimming driver.

Finishes


| | |
|----|-------|
| AW | White |
| AB | Black |
| BR | Brass |
| WD | Wood |

Beam Angle



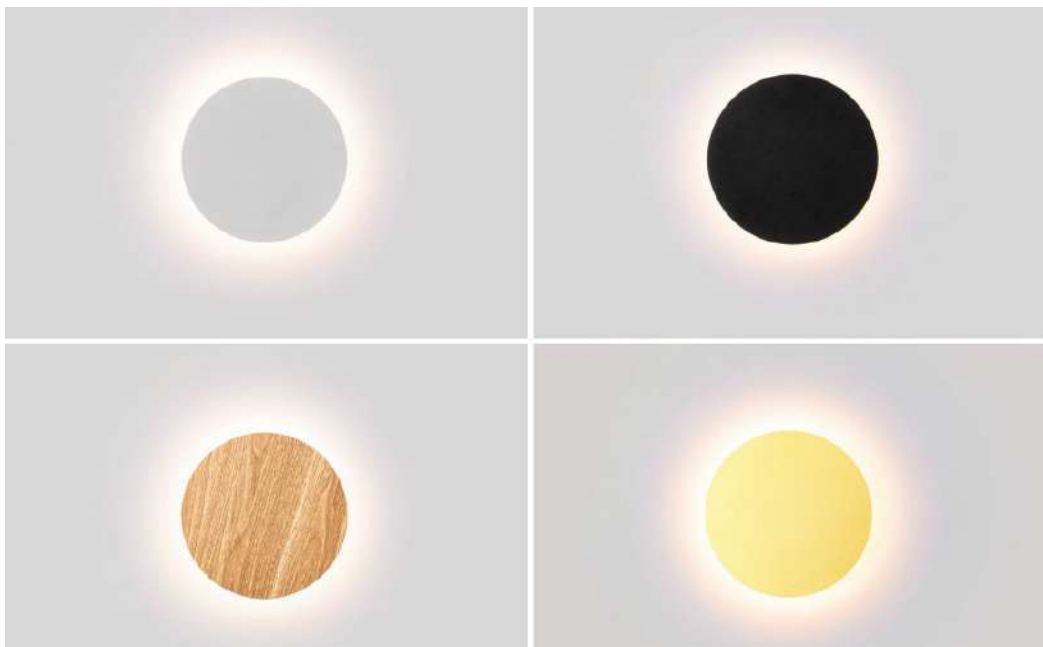

Sketch

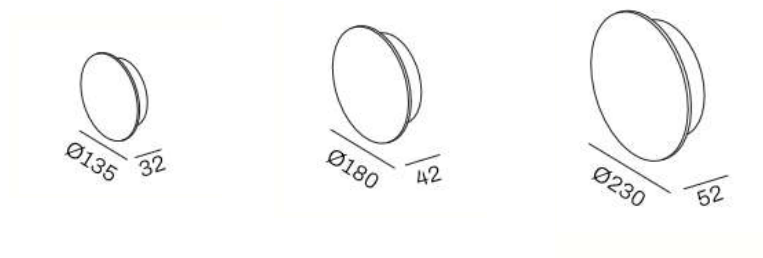

Glory 135/180/230

Round shape wall light with difference sizes;
Wall light for decorative purpose;
Max IP65;

**TL-WL-3128/TL-WL-3129/
TL-WL-3130**

Light Source

10W 500lm/15W 800lm/20W 1000lm,
250/350/5000mA 36V, CRI>90, SDCM<3
SMD LEDs

Gear


This product is supplied with on/off or
phase-cut dimming driver.

Finishes


| | |
|----|-------|
| AW | White |
| AB | Black |
| BR | Brass |
| WD | Wood |

Beam Angle



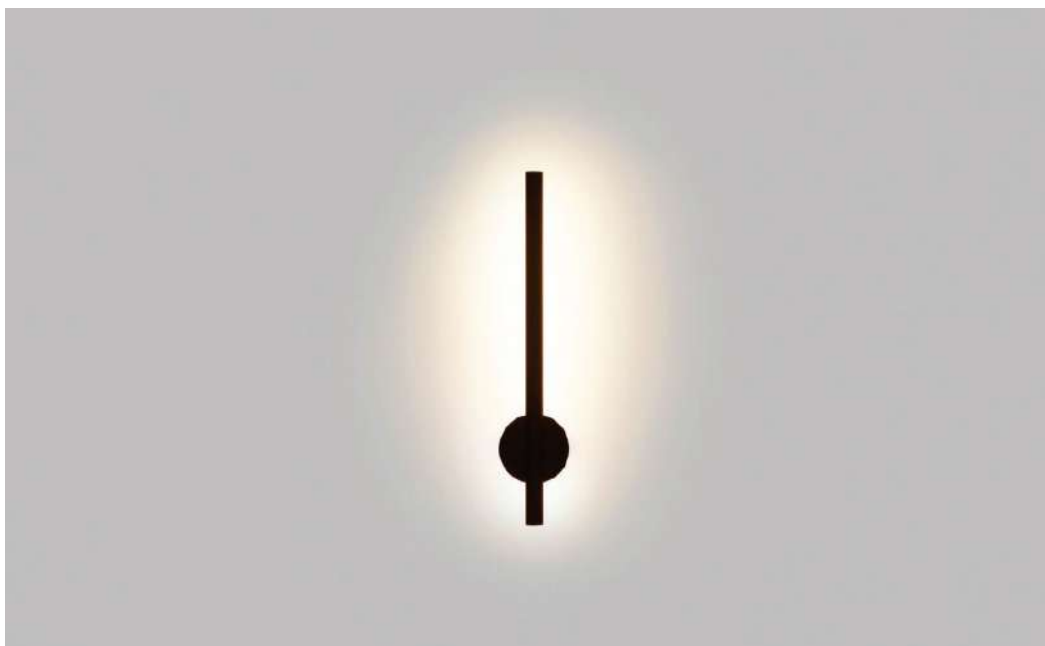

Sketch



Trocia 400

Tubular wall light;
IP44 suitable for bathroom use;
Available with DALI driver;
Continuous light tube;

TL-WL-3100

Light Source

6W 500lm, 260mA 20V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with phase-cut
dimming driver.


Accessories

1.8m prewired on cord dimmer.

Finishes

AW White
AB Black

Beam Angle





Sketch



Sketch



NEW **Trocia**
Rectangle 500

Tubular wall light with
rectangle wall box;
One screw installation;
Stylish design;

TL-WL-3173

Light Source

5W 300lm, 150mA 36V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with on/off or
phase-cut dimming driver.

Finishes

- AW** White
- AB** Black
- BB** Brushed Brass
- BZ** Brushed Bronze

Beam Angle



NEW **Trocia**
Rectangle 800

Tubular wall light;
Soft light;
Various finishings;
IP65;

TL-WL-3174

Light Source

8W 480lm, 200mA 36V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with on/off or
phase-cut dimming driver.

Finishes


- AW** White
- AB** Black
- BB** Brushed Brass
- BZ** Brushed Bronze

Beam Angle






Sketch



Sketch



NEW Lent Wall 120

Glass ball for ceiling or wall;
Ultra slim canopy;
Driver on board;
Phase-cut dimming;
IP54;

Light Source

8W 385lm, 230V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with driver
on-board.

Finishes

AW White
AB Black

Beam Angle



TL-WL-3189

NEW Lent Wall 180

Glass ball for ceiling or wall;
Ultra slim canopy;
Driver on board;
Phase-cut dimming;
IP54;

Light Source

8W 385lm, 230V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with driver
on-board.

Finishes

AW White
AB Black


Beam Angle




TL-WL-3190



Sketch



Sketch



NEW Celeste 125

Wall light for interior and exterior wall;
LED module design;
IP65;

TL-WL-3063

Light Source

7W 380lm, 150mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with on/off or
phase-cut dimming driver.

Finishes

- AW** White
AB Black

Beam Angle

- 15° 36° 50°
IP65

NEW Celeste 180

Wall light for interior and exterior wall;
LED module design;
IP65;

TL-WL-3064

Light Source

10W 585lm, 250mA 36V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with on/off or
phase-cut dimming driver.

Finishes

- AW** White
AB Black
BB Brushed Brass

Beam Angle

- 15° 36° 50°
IP65



Sketch



NEW Celeste Square

Up & down shine;
Modular design;

TL-WL-3066

Light Source

10W 585lm, 250mA 36V, CRI>90, SDCM<3
LES06





Gear

This product is supplied with on/off or
phase-cut dimming driver.

Finishes

AW White
AB Black

Beam Angle

15° 36° 50°






Reading


Reading is always a joyful and relaxed thing, though nowadays people refer grabbing a cellphone instead of holding a book. Time flies and changes people's lifestyle, but a light aside will always keep you comfortable, safe and sound, when you're doing a thing or doing nothing.

READING



Sketch

 Cutout: 120x35mm
 5-25mm



NEW Ruspa 153

Classic design;
 Recessed mount;
 Lift to "on" and push back to "off";

TL-WL-3030

Light Source

2W 180lm, 500mA 3V, CRI>90, SDCM<2
High power LED

Gear

This product is supplied with built-in driver.

Finishes

☐ AW White
☒ AB Black

Beam Angle

☐ 40°
☒   


Light Distribution For 3000K

Medium 28°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 467.3 | Ø0.50 |
| 2 | 116.8 | Ø1.01 |
| 3 | 51.92 | Ø1.51 |
| 4 | 29.20 | Ø2.02 |
| 5 | 18.69 | Ø2.52 |



Sketch

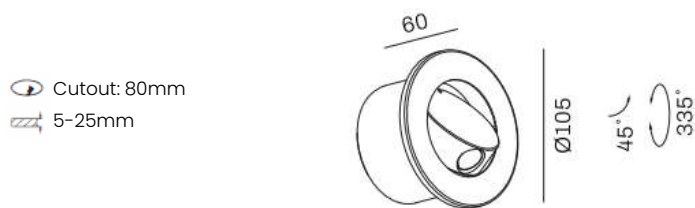

Elio 105

Round recessed reading light;
Recessed mount;
Slide out "on" and push back to "off";

TL-WL-3039

Light Source

2W 180lm, 500mA 3V, CRI>90, SDCM<2
High power LED

Gear


This product is supplied with built-in driver.

Finishes


AW White
AB Black

Beam Angle

40°
CE IP21

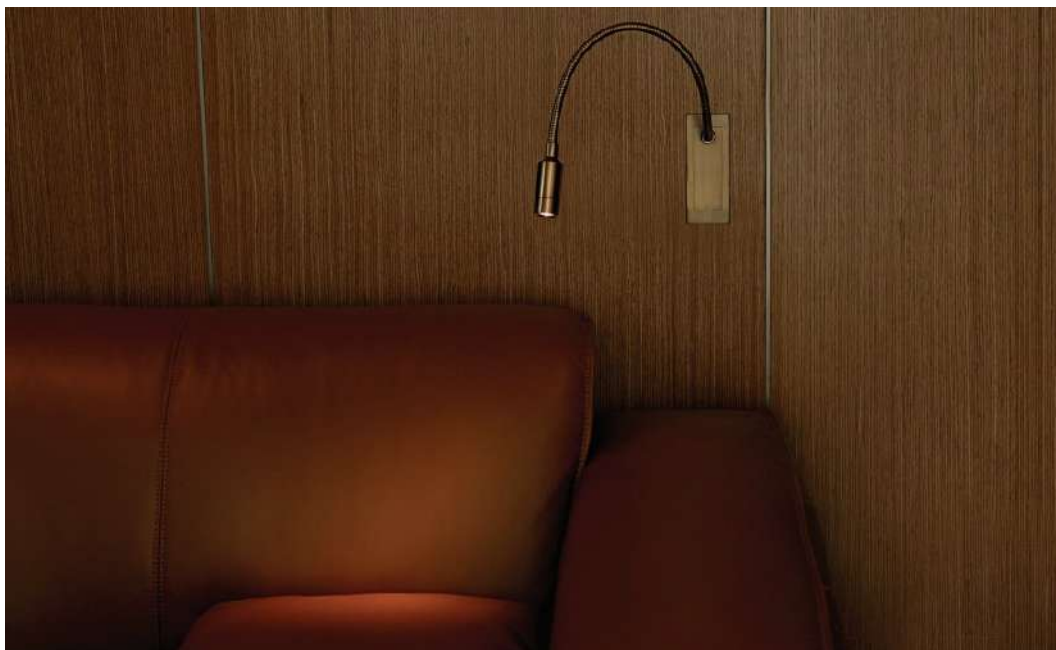

Sketch

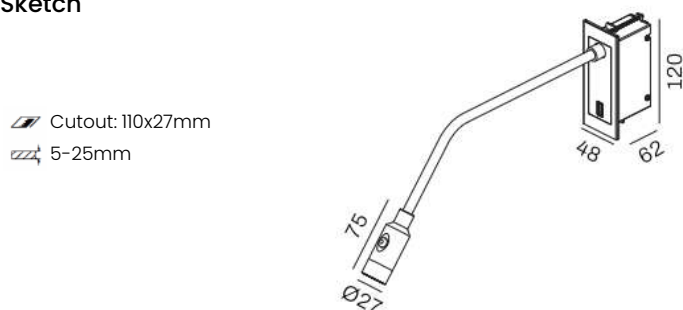

NEW **Oca Neck
Rectangle 120**

Goose neck reading light;
On/off button on top;
Standard and USB socketed version available;

Light Source
2W 135lm, 500mA 3V, CRI>90, SDCM<2
High power LED

Gear
This product is supplied with built-in driver.

Finishes

AW White
AB Black

Beam Angle

40°
CE IP21


TL-WL-3050

Light Distribution For 3000K
Medium 28°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 467.3 | Ø0.50 |
| 2 | 116.8 | Ø1.01 |
| 3 | 51.92 | Ø1.51 |
| 4 | 29.20 | Ø2.02 |
| 5 | 18.69 | Ø2.52 |



Sketch



Sketch



Glory USB 100

Round reading light;
Spot and halo ring;
USB charger;

TL-WL-3057

Light Source

2W 135lm, 500mA 3V, CRI>90, SDCM<3

Gear

This product is supplied with built-in driver.

Finishes

AW White
AB Black

Beam Angle

40°
CE IP21

Glory Rectangle USB 180

Rectangle reading light;
Spot and halo ring;
USB charger;

TL-WL-3058

Light Source

2W 135lm, 500mA 3V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with built-in driver.

Finishes

AW White
AB Black

Beam Angle


40°
CE IP21

Light Distribution For 3000K Medium 28°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 467.3 | Ø0.50 |
| 2 | 116.8 | Ø1.01 |
| 3 | 51.92 | Ø1.51 |
| 4 | 29.20 | Ø2.02 |
| 5 | 18.69 | Ø2.52 |



Sketch



NEW **Glory Rectangle**
USB 230

Stylish reading light;
Halo ring;

TL-WL-3192

Light Source

2W 140lm, 700mA 3V, CRI>90, SDCM<2
High power LED

Gear

This product is supplied with built-in driver.

Finishes

- AW** White
AB Black

Beam Angle

- 40°
CE IP21



Steps


Watch your back and lead you the way, you can have no step lights with them, the night becomes warmer.

SAFETY STEPS



Sketch

 Cutout: 65mm
 5-25mm



Virtus 83

IP65 step light with interchangeable bezels;
Round slide bezel;

TL-WL-3019A

Light Source

2W 88lm, 500mA 3V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with built-in driver.

Finishes

AW White
AB Black


Beam Angle





Light Distribution For 2700K


Wide 48°
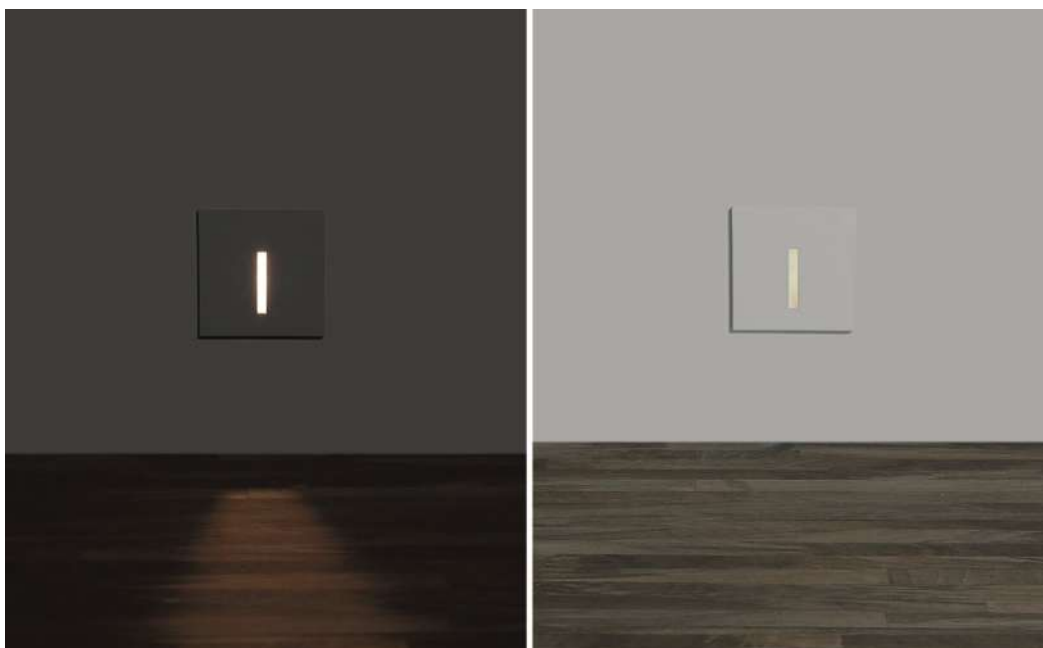
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 25.74 | ø0.89 |
| 2 | 6.436 | ø1.78 |
| 3 | 2.860 | ø2.67 |
| 4 | 1.609 | ø3.57 |
| 5 | 1.030 | ø4.46 |



Sketch

 Cutout: 65mm
 5-25mm



Virtus Square 83

IP65 step light with interchangeable bezels;
Slide bezel;

TL-WL-3019B

Light Source

2W 88lm, 500mA 3V, CRI>90, SDCM<3

Gear

This product is supplied with built-in driver.

Finishes

AW White
AB Black


Beam Angle





Light Distribution For 2700K


Wide 48°
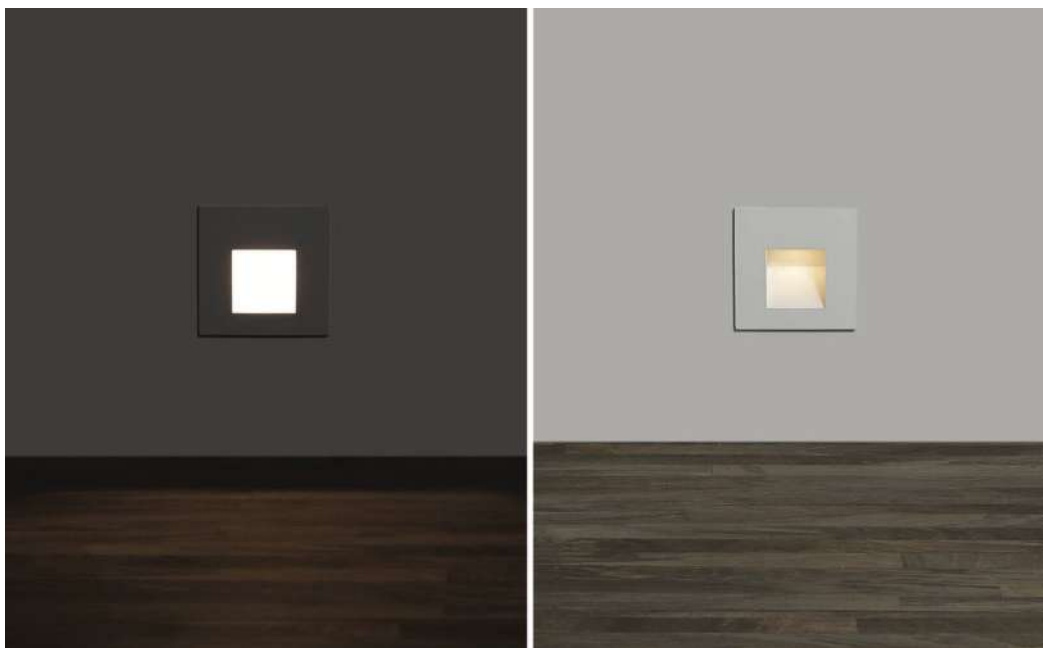
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 25.74 | ø0.89 |
| 2 | 6.436 | ø1.78 |
| 3 | 2.860 | ø2.67 |
| 4 | 1.609 | ø3.57 |
| 5 | 1.030 | ø4.46 |



Sketch

 Cutout: 65mm
 5-25mm



Ostrica Square 83

IP65 step light with interchangeable bezels;
Flush bezel;

TL-WL-3019C

Light Source

2W 88lm, 500mA 3V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with built-in driver.

Finishes

AW White
AB Black


Beam Angle





Light Distribution For 2700K


Wide 48°
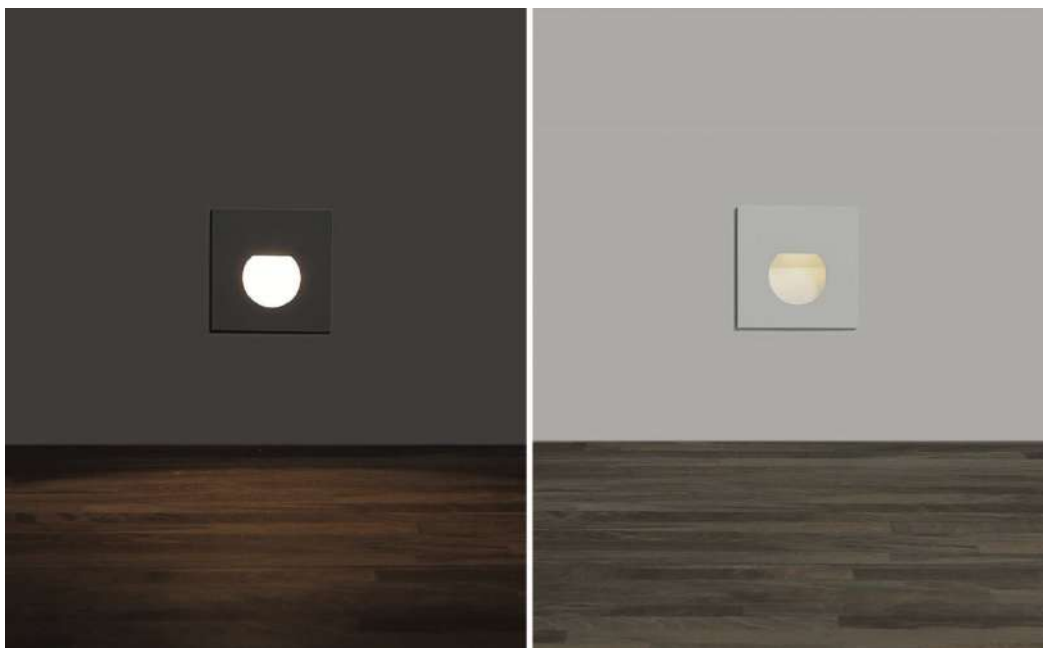
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 25.74 | ø0.89 |
| 2 | 6.436 | ø1.78 |
| 3 | 2.860 | ø2.67 |
| 4 | 1.609 | ø3.57 |
| 5 | 1.030 | ø4.46 |



Sketch

 Cutout: 65mm
 5-25mm



Elos Square 83

IP65 step light with interchangeable bezels;
Curve bezel;

TL-WL-3019D

Light Source

2W 88lm, 500mA 3V, CRI>90, SDCM<3

Gear

This product is supplied with built-in driver.

Finishes

AW White
AB Black

Beam Angle





Light Distribution For 2700K


Wide 48°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 25.74 | ø0.89 |
| 2 | 6.436 | ø1.78 |
| 3 | 2.860 | ø2.67 |
| 4 | 1.609 | ø3.57 |
| 5 | 1.030 | ø4.46 |



Sketch

 Cutout: 65mm
 5-25mm



Elos 83

IP65 step light with interchangeable bezels;
Curve bezel;

TL-WL-3019E

Light Source

2W 88lm, 500mA 3V, CRI>90, SDCM<3

Gear

This product is supplied with built-in driver.

Finishes

AW White
AB Black


Beam Angle




Light Distribution For 2700K

Wide 48°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 25.74 | ø0.89 |
| 2 | 6.436 | ø1.78 |
| 3 | 2.860 | ø2.67 |
| 4 | 1.609 | ø3.57 |
| 5 | 1.030 | ø4.46 |

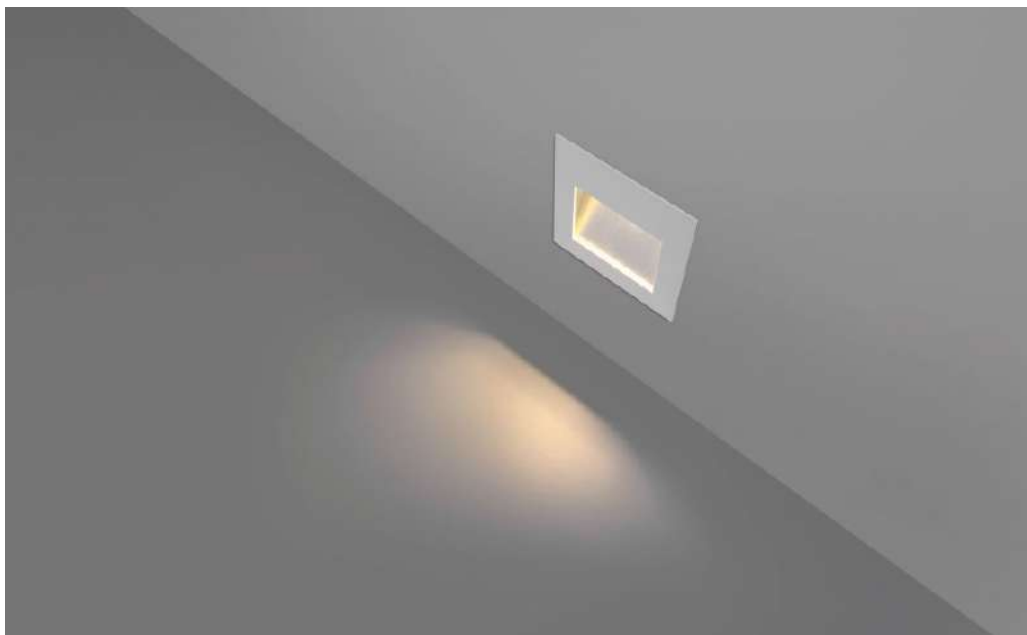

Sketch

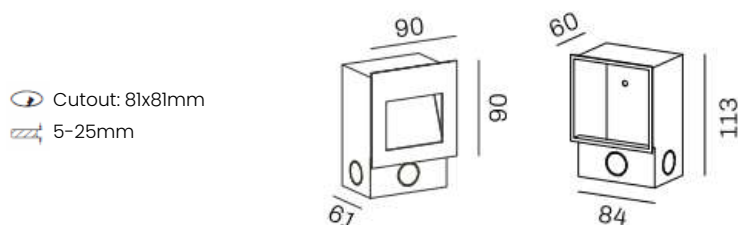

Jan 83

IP65 step light with interchangeable bezels;
Brushed aluminum back plate;
Supplied with premount wall box;

TL-WL-3001

Light Source

2W 180lm, 500mA 3V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with built-in driver.

Finishes

☐ AW White
☒ AB Black


Beam Angle




Light Distribution For 3000K

Wide 111°

| h(m) | E(lx) | ø(m) |
|------|-------|--------|
| 1 | 16.38 | Ø2.91 |
| 2 | 4.095 | Ø5.83 |
| 3 | 1.820 | Ø8.74 |
| 4 | 1.024 | Ø11.66 |
| 5 | 0.655 | Ø14.57 |

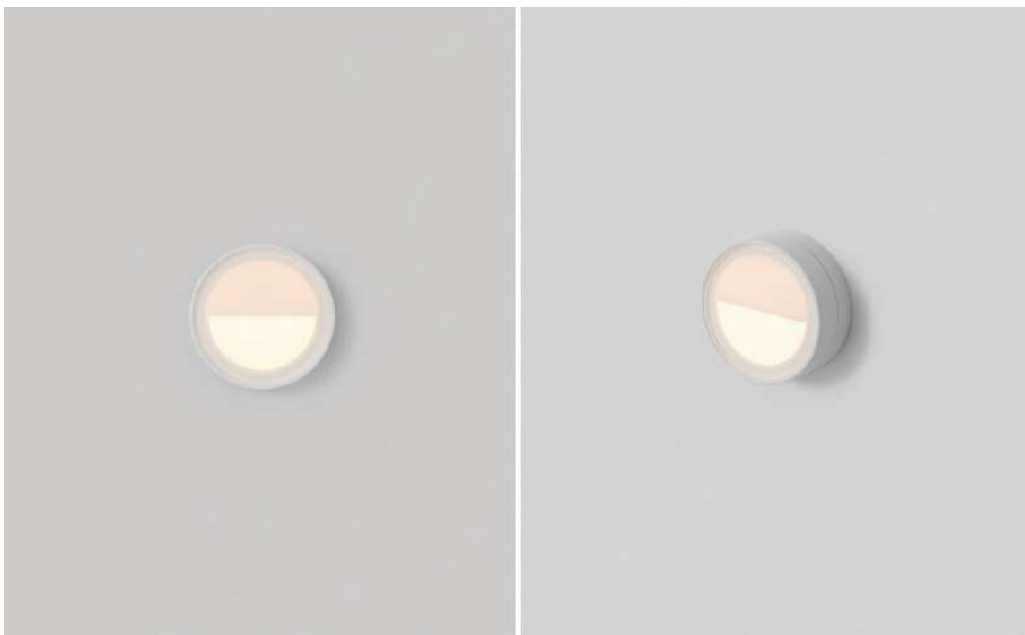

Sketch



NEW Conica Eyelid 50

Linear step light;
IP65;

TL-WL-3185A

Light Source

2W 46lm, 24V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied without
power supply.

Finishes

AW White
AB Black


Beam Angle




Light Distribution For 3000K

Wide 111°

| h(m) | E(lx) | ø(m) |
|------|-------|--------|
| 1 | 16.38 | Ø2.91 |
| 2 | 4.095 | Ø5.83 |
| 3 | 1.820 | Ø8.74 |
| 4 | 1.024 | Ø11.66 |
| 5 | 0.655 | Ø14.57 |

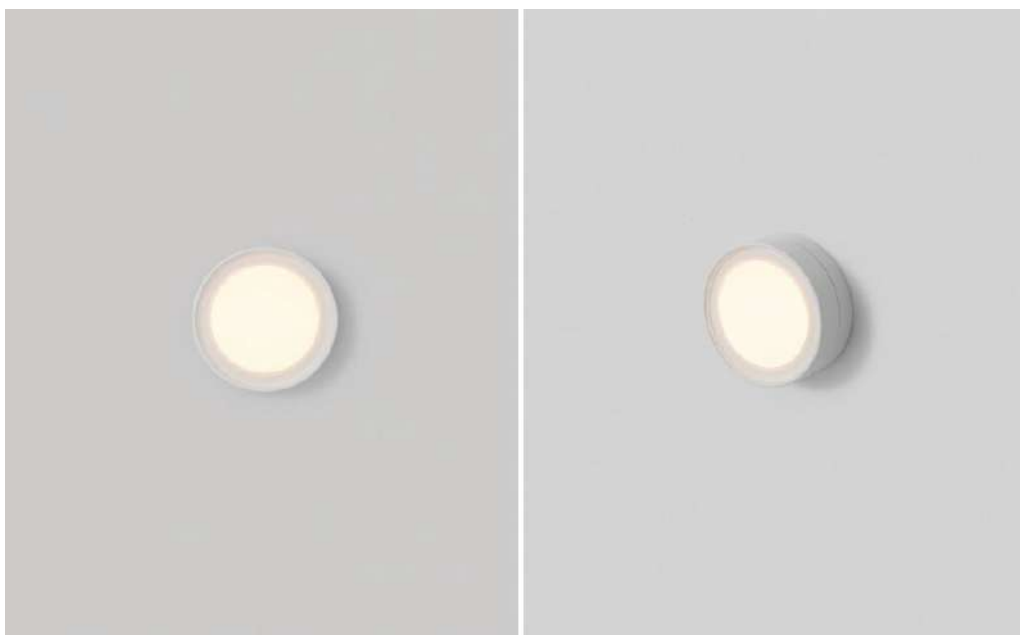

Sketch



NEW Conica Marker 50

24V constant voltage dimming;
Supplied with eyelid & diffused versions;
Ultra slim and compact body;
IP65;

TL-WL-3185B

Light Source

2W 46lm, 24V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied without
power supply.

Finishes

AW White
AB Black

Beam Angle




Light Distribution For 3000K

Wide 111°


| h(m) | E(lx) | ø(m) |
|------|-------|--------|
| 1 | 16.38 | ø2.91 |
| 2 | 4.095 | ø5.83 |
| 3 | 1.820 | ø8.74 |
| 4 | 1.024 | ø11.66 |
| 5 | 0.655 | ø14.57 |



Sketch

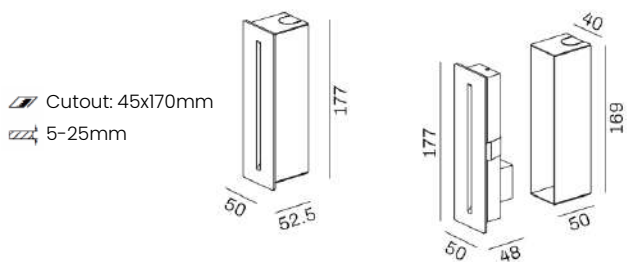

Sketch

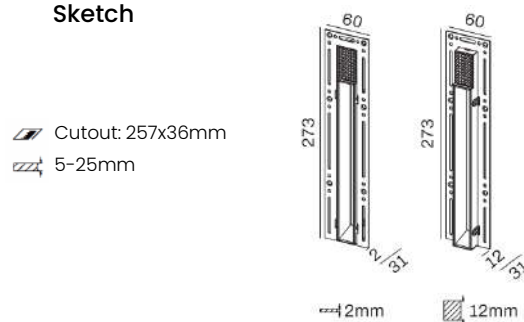

Wanda 200

Linear step light;
IP65;

TL-WL-3089

Light Source

3W 80lm, 700mA 3V, CRI>90, SDCM<3

Gear

This product is supplied with built-in driver.

Finishes

AW White
AB Black

Beam Angle



Wanda Trimless 200

Trimless step light;
Flush to floor ceiling;
2-12mm adjustable premount box;

TL-WL-3103

Light Source

2W 120lm, 500mA 3V, CRI>90, SDCM<3
High power LED


Gear

This product is supplied with built-in driver.

Finishes

AW White
AB Black

Beam Angle



EXTERIOR

A range of mid/small power lights designed for exterior ceiling, wall, floor, paths and gardens.




Ceiling

Exterior ceiling combines a group of simple and compact durable products. Suitable for use in areas like balcony, corridor or interior bathrooms.

CEILING



Sketch



Spill Ball 140

Ceiling or wall mount lamp;
Opal glass shield;
IK08;
IP65;

TL-WL-3070

Light Source

7W 400lm, 350mA 18V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with built-in
phase-cut dim driver.

Finishes

- AW** White
AB Black


Beam Angle

Flood





Sketch



NEW Vasiere 70

Compact 5watt spot;
Suitable for shallow ceiling;
IP65;

TL-SD-3039

Light Source

5W 310lm, 500mA 9V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with built-in
driver.

Finishes

AW White
AB Black

Beam Angle

24° 36°
CE IP65


Light Distribution For 3000K

Wide 33°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 647.3 | Ø0.60 |
| 2 | 161.8 | Ø1.20 |
| 3 | 71.92 | Ø1.79 |
| 4 | 40.45 | Ø2.39 |
| 5 | 25.89 | Ø2.99 |



Sketch



Conica Mini 50

Mini fixed spot;
IP65;

TL-SD-3191

Light Source

5W 370lm, 500mA 9V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with built-in
driver.

Finishes

AW White
AB Black

Beam Angle

24° 36°
CE IP65



Light Distribution For 3000K

Wide 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 486.3 | Ø0.68 |
| 2 | 121.6 | Ø1.36 |
| 3 | 54.03 | Ø2.04 |
| 4 | 30.39 | Ø2.72 |
| 5 | 19.45 | Ø3.40 |



Sketch



Conica Zoom LV 40

24V constant voltage dimming;
Zoom lens;
IP65;

TL-SD-3117

Light Source

6W 230lm, 24V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle

13-80°
III
CE
IP65

Light Distribution For 3000K

Spot 13.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1375 | Ø0.23 |
| 2 | 343.8 | Ø0.47 |
| 3 | 152.8 | Ø0.70 |
| 4 | 85.96 | Ø0.93 |
| 5 | 55.01 | Ø1.17 |

Medium 34.4°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 478.2 | Ø0.62 |
| 2 | 119.6 | Ø1.24 |
| 3 | 53.14 | Ø1.86 |
| 4 | 29.89 | Ø2.48 |
| 5 | 19.13 | Ø3.10 |

Wide 81.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 238.7 | Ø1.72 |
| 2 | 59.68 | Ø3.43 |
| 3 | 26.53 | Ø5.15 |
| 4 | 14.92 | Ø6.86 |
| 5 | 9.549 | Ø8.58 |


Wall Luminaires

Exterior wall light, stylish and functional. A collection of Lux Luci's most popular wall lights for architecture lighting.





Sketch



Spill Ball 140

Wall ball;
140mm diffused glass;
IP65;

TL-WL-3070

Light Source

7W 400lm, 350mA 18V, CRI>90, SDCM<3
LES06




Gear

This product is supplied with built-in
power supply.

Finishes


AW White
AB Black

Beam Angle

Flood






Sketch



NEW **Merlin**
Downshine 60

Delta shape wall light with
difference sizes;
Wall light for decorative purpose;
IP65;

TL-WL-3176

Light Source
5.4W 523lm, 150mA 36V, CRI>90, SDCM<3
LES06

Gear
This product is supplied with on/off or
phase-cut dimming driver.

Finishes

AW White
AB Black

Beam Angle

40°




Light Distribution For 2700K
Wide 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 948.7 | Ø0.70 |
| 2 | 237.2 | Ø1.39 |
| 3 | 105.4 | Ø2.09 |
| 4 | 59.30 | Ø2.78 |
| 5 | 37.95 | Ø3.48 |



Sketch



NEW **Regolo
Downshine 100**

Delta shape wall light with difference sizes;
Wall light for decorative purpose;
IP65;

TL-WL-3155

Light Source

5.4W 324lm, 150mA 36V, CRI>90, SDCM<3
LES06




Gear

This product is supplied with on/off or
phase-cut dimming driver.

Finishes


- AW** White
AB Black

Beam Angle

- 40°






Sketch



Merlin 600

Ultra slim body;
Up & down spots;
LED module design;
IP65;

TL-WL-3113

Light Source

2x3W 400lm, 350mA 18V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with built-in
power supply.

Finishes

AW White
AB Black


Beam Angle

15° 24° 36°



Sketch



Clea 180

Flat wall light;
Up & down spots;
IP65;

TL-WL-3105

Light Source

2x5W 450lm, 500mA 24V, CRI>90, SDCM<3
LES06

Gear


This product is supplied with built-in
power supply.

Finishes


AW White
AB Black

Beam Angle

20x40°
CE IP65

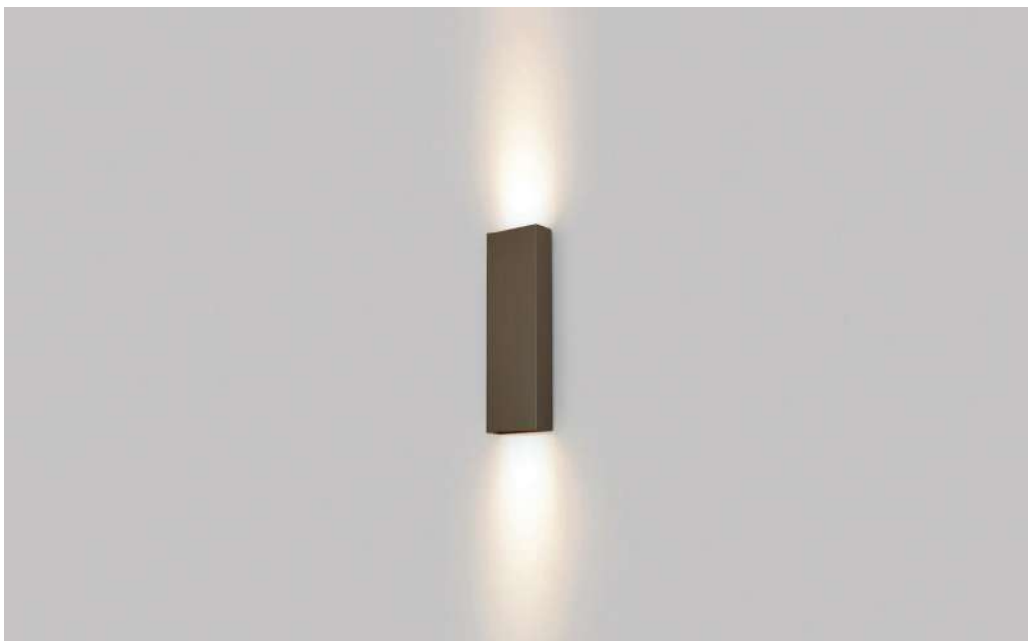

Sketch



Clea 300

Flat wall light;
Up & down spots;
IP65;

TL-WL-3107

Light Source

2x5W 450lm, 350mA 24V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with built-in
power supply.

Finishes

AW White
AB Black

Beam Angle

20x40°
CE IP65


Linear

With time goes by, the linear series will uniform a great family from surface washing to in-ground grazing, and walk/driver-over marking.

LINEAR



Sketch

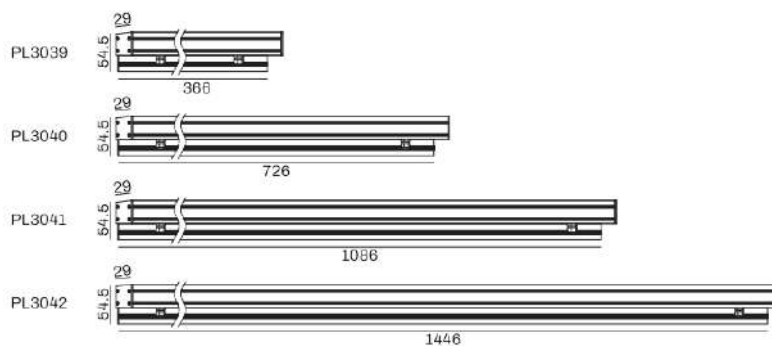

NEW Mirage Linear 1000

Linear washer in 3 sizes;
Very low UGR design;
IP65;

TL-PL-3042

Light Source

10W/15W/20W, 429mm 883lm, 1129mm
2109lm, 250/350/500mA 36V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

20° 40°
III CE IP65

Light Distribution For 3000K

Medium 28.5°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 7009 | ø0.51 |
| 2 | 1752 | ø1.02 |
| 3 | 778.8 | ø1.53 |
| 4 | 438.1 | ø2.04 |
| 5 | 280.4 | ø2.54 |


In-Ground

Up lights for garden;
Low glare;
Constant current or voltage

IN-GROUND



Sketch

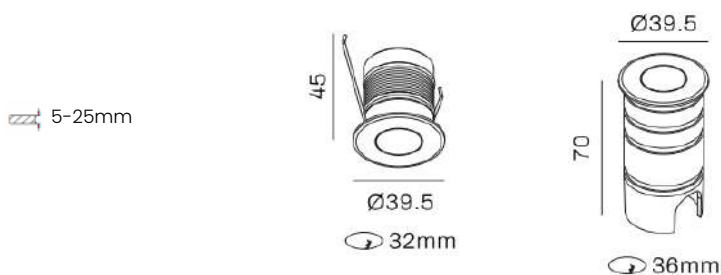

Solli 30

Low glare up light;
Compact size;
IK10;
IP67;

TL-BS-3037

Light Source

3W 150lm, 700mA 3V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with LED driver.

Accessories

Premount sleeve;
Recess mount spring

Finishes

AB Black

NSS Nature Stainless Steel

Beam Angle


10° 24°

III CE IP67



Light Distribution For 2700K


Spot 10.7°
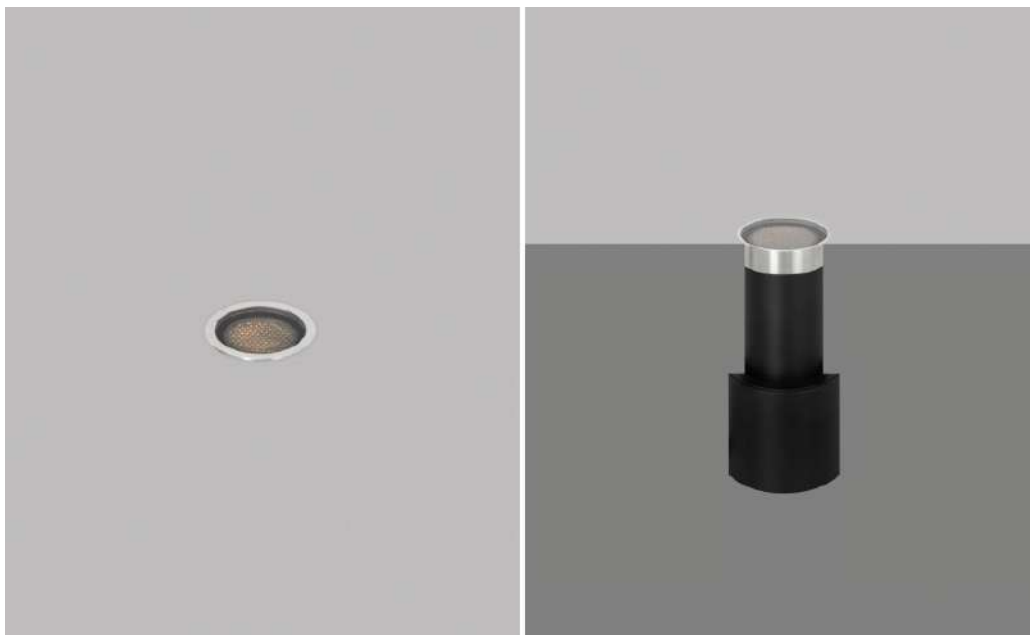
| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1040 | Ø0.19 |
| 2 | 260.0 | Ø0.37 |
| 3 | 115.6 | Ø0.56 |
| 4 | 65.00 | Ø0.75 |
| 5 | 41.60 | Ø0.94 |



Sketch

 Cutout: 52mm
 5-25mm



Nano Trimless 30

SUS316 slim trim or trimless bezel;
 24V constant voltage dimming;
 Asymmetric beam available;
 IK20;
 IP67;

TL-BS-3070

Light Source

3W 230lm, 24V, CRI>90, SDCM<3
SMD5050

Gear

This product is supplied with LED driver.

Accessories

Premount sleeve;
Honeycomb louvre

Finishes

AB Black
NSS Nature Stainless Steel



Beam Angle


15° 24° 20°






Sketch

 Cutout: 82mm
 5-25mm

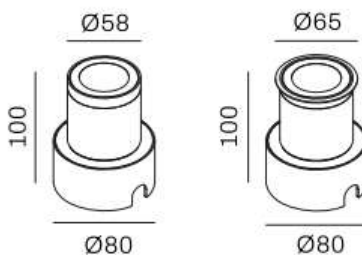

Nano Trimless 60

SUS316 bezel with slim trim or trimless;
24V constant voltage dimming;
IK20;
IP67;

TL-BS-3071

Light Source

6W 330lm, 24V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Premount sleeve;
Honeycomb louvre

Finishes

AB

Black

NSS

Nature Stainless
Steel

Beam Angle


15° 24° 20°







Sketch

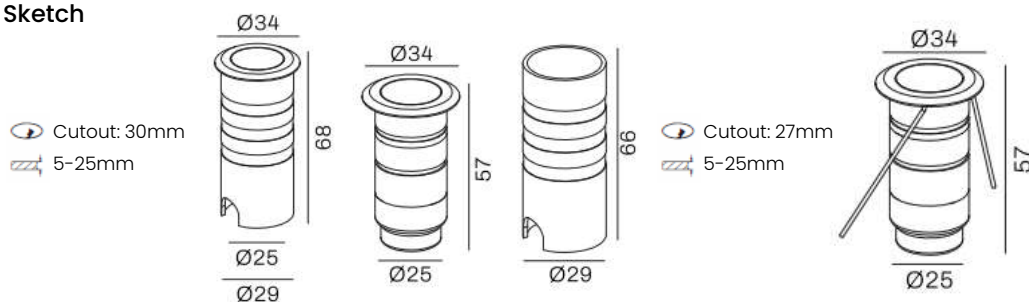

NEW Nano Spot 25

Low UGR design;
DC24V design;

TL-BS-3088A

Light Source

2W 44lm, 24V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with LED driver.

Accessories

Premount sleeve;
Honeycomb louvre

Finishes

AB Black

NSS Nature Stainless Steel

Beam Angle

15° 20° 30°



III CE IP67


Light Distribution For 2700K Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 90.62 | Ø5.37 |
| 2 | 22.65 | Ø1.07 |
| 3 | 10.07 | Ø1.61 |
| 4 | 5.660 | Ø2.15 |
| 5 | 3.630 | Ø2.68 |



Sketch

 Cutout: 30mm
 5-25mm

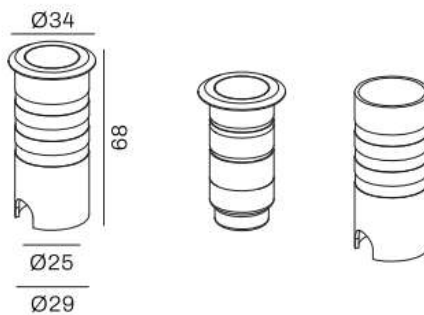

NEW Nano Eyelid 25

Low UGR design;
DC24V design;

TL-BS-3088B

Light Source

2W 44lm, 24V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with LED driver.

Accessories

Premount sleeve;
Honeycomb louvre

Finishes

AB Black

NSS Nature Stainless Steel

Beam Angle

15° 20° 30°


  

Light Distribution For 2700K Medium 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 90.62 | ø5.37 |
| 2 | 22.65 | ø1.07 |
| 3 | 10.07 | ø1.61 |
| 4 | 5.660 | ø2.15 |
| 5 | 3.630 | ø2.68 |



Sketch

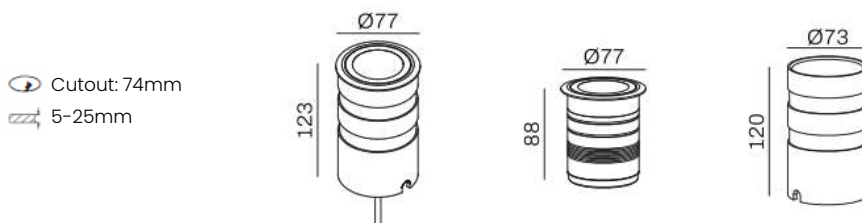

NEW Nano Spot 74

Low UGR design;
DC24V design;

TL-BS-3066

Light Source

8W 416lm, 24V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Accessories

Premount sleeve;
Honeycomb louvre

Finishes

AB Black

NSS Nature Stainless Steel

Beam Angle

15° 20° 30°

III CE IP67



Light Distribution For 2700K

Medium 15°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 3185 | ø0.25 |
| 2 | 796.2 | ø0.50 |
| 3 | 353.9 | ø0.75 |
| 4 | 199.0 | ø0.99 |
| 5 | 127.4 | ø1.25 |



Sketch

 Cutout: 30mm
 5-25mm



NEW Nano Marker 30

24V constant voltage dimming;
Stainless steel bezel;
Low UGR design;
Shallow depth suitable for marble
interface;

TL-BS-3108

Light Source

1.2W 15lm, 24V, CRI>90, SDCM<3
SMD5050

Gear

This product is supplied with LED driver.

Accessories

Premount sleeve;
Honeycomb louvre

Finishes

AB Black
NSS Nature Stainless
Steel

Beam Angle



 Flood
  


Light Distribution For 3000K Medium Flood

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 9.440 | Ø1.03 |
| 2 | 2.360 | Ø2.05 |
| 3 | 1.050 | Ø3.08 |
| 4 | 0.590 | Ø4.10 |
| 5 | 0.380 | Ø5.13 |



Sketch

 Cutout: 55mm
 5-25mm



NEW Nano Washer 30

Stainless steep top;
Light from side;
Washer further and flood on floor;
DC24V dimming;
Walk/driver over;
IP67;

TL-BS-3094



Light Source
2W 75lm, 24V, CRI>90, SDCM<3
High power LED

Gear
This product is supplied with LED driver.

Finishes

AB Black
NSS Nature Stainless Steel

Beam Angle

15° 30° 60°
  IP67

Recessed Wall Luminaires



Exterior markers and step lights,
suitable for gardens and exterior walls.




RECESSED WALL



Sketch

 Cutout: 33~35mm
 5-25mm



Madison 30

Ultra compact body;
Low glare design;
IP65;

TL-WL-3077

Light Source

3W 30lm, 700mA 3V, CRI>90, SDCM<3
High power LED

Gear


This product is supplied with LED driver.

Finishes



AW White
AB Black


Beam Angle

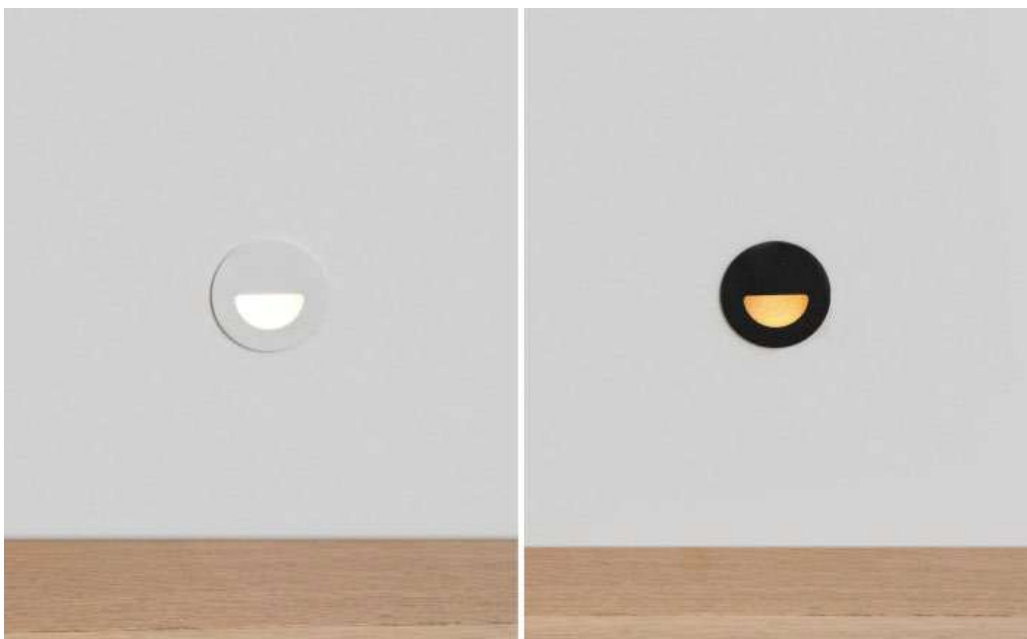



Sketch

 Cutout: 33~35mm
 5-25mm



Faro 30

Ultra compact body;
Low glare design;
IP65;

TL-WL-3078

Light Source

3W 30lm, 700mA 3V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with LED driver.

Finishes



☐ AW White
☒ AB Black


Beam Angle





Sketch

 Cutout: 30mm
 5-25mm



Rialto 30

1watt LED marker;
24V constant voltage dimming;
Compact body for marble or stone;
IP67;

TL-BS-3073

Light Source

1W 90lm, 24V, CRI>90, SDCM<3
SMD5050

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

Flood
 **CE** **IP67**


Light Distribution For 3000K

Wide 108.2°

| h(m) | E(lx) | ø(m) |
|------|-------|--------|
| 1 | 17.50 | Ø2.76 |
| 2 | 4.376 | Ø5.52 |
| 3 | 1.945 | Ø8.29 |
| 4 | 1.094 | Ø11.05 |
| 5 | 0.700 | Ø13.82 |



Sketch

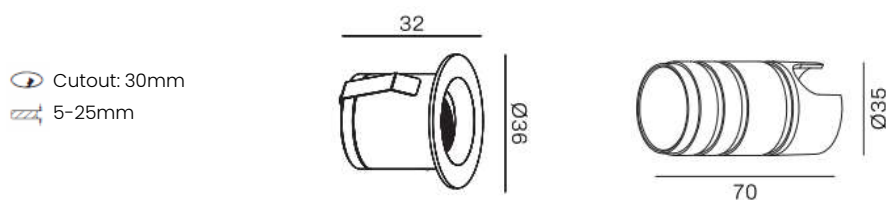

Cutout: 30mm
 5-25mm

NEW Penta 30

Asymmetric lens;
Downshine washer;
Wall recessed only;
IP65;

TL-DL-3627

Light Source

3W 90lm, DC24V, CRI>90, SDCM<3
SMD5050

Gear

This product is supplied with LED driver.

Accessories

Stainless steel clip;
Premount sleeve

Finishes

☐ AW White
☒ AB Black
☐ BA Brush Anodizing

Beam Angle



Light Distribution For 3000K


Medium 23.7°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 618.5 | ø0.42 |
| 2 | 154.6 | ø0.84 |
| 3 | 68.72 | ø1.26 |
| 4 | 38.66 | ø1.68 |
| 5 | 24.74 | ø2.10 |



Steps


Exterior markers and step lights,
suitable for garden and exterior walls.

STEPS

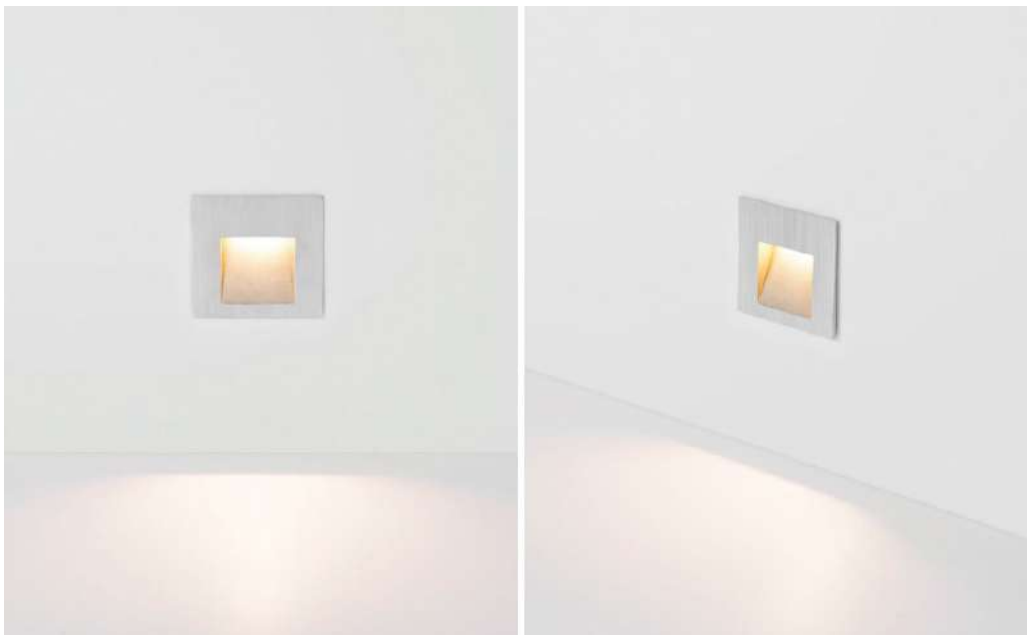

Sketch

 Cutout: 65x65mm
 5-25mm

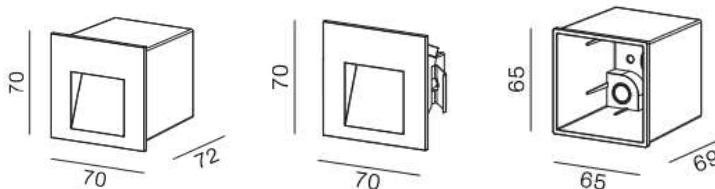

NEW Getto 70

Stainless steel (SUS316) bezel;
 Stylish design;
 Recessed installation;
 IP65;

TL-WL-3146

Light Source

3W 40lm, 700mA 3V, CRI>90, SDCM<3

Gear

This product is supplied with built-in driver.

Accessories

Premount box

Finishes

AB Black

NSS Nature Stainless Steel

Beam Angle



Flood




IP65



Light Distribution For 2700K

Medium 20°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 77.05 | ø0.41 |
| 2 | 19.26 | ø0.81 |
| 3 | 8.561 | ø1.22 |
| 4 | 4.816 | ø1.63 |
| 5 | 3.082 | ø2.03 |

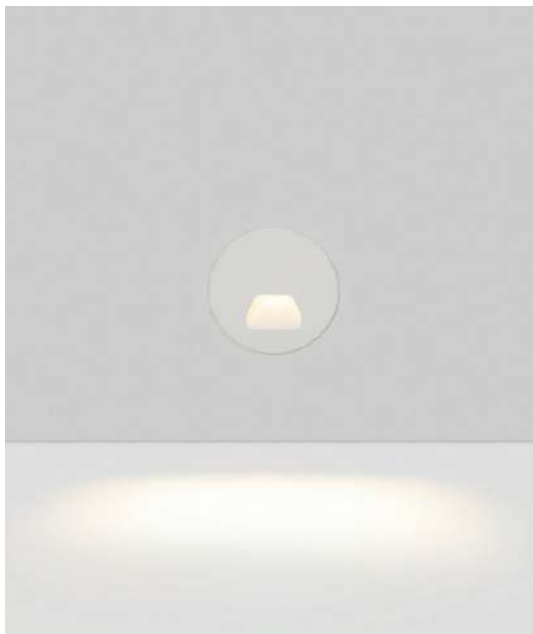

Sketch

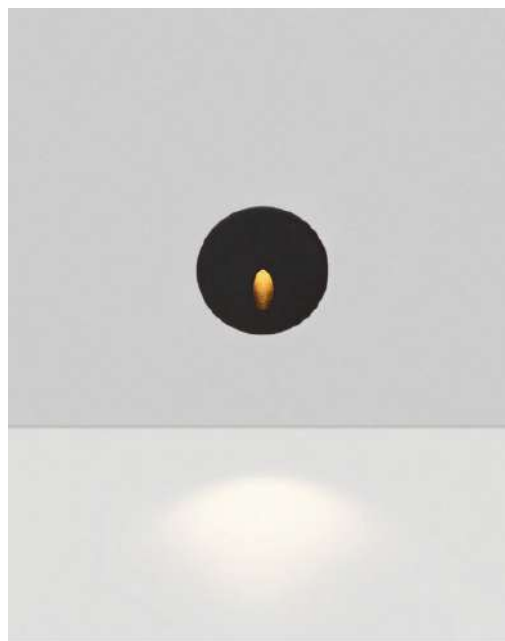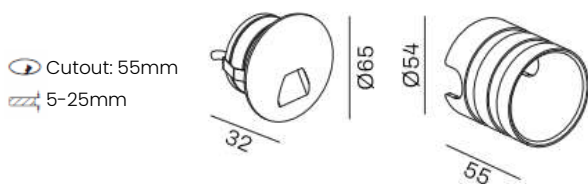

Sketch

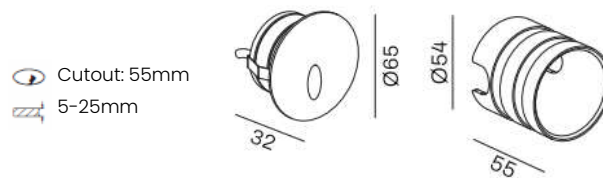

Lavori Round Spray 24V 55

24V constant voltage dimming;
Integrate aluminum body;
IP65;

TL-WL-3108

Light Source

3W 63lm, 24V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with LED driver.

Accessories

Stainless steel clip;
Premount sleeve

Finishes

AW White
AB Black

Beam Angle



Lavori Round Pinhole 24V 55

24V constant voltage dimming;
Integrate aluminum body;
IP65;

TL-WL-3109

Light Source

3W 63lm, 24V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with LED driver.

Accessories

Stainless steel clip;
Premount sleeve

Finishes



AW White
AB Black

Beam Angle






Sketch

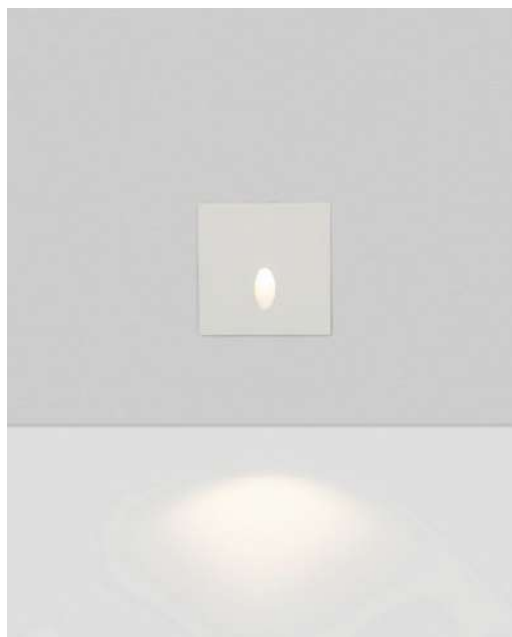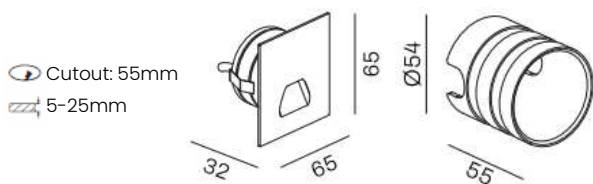

Sketch

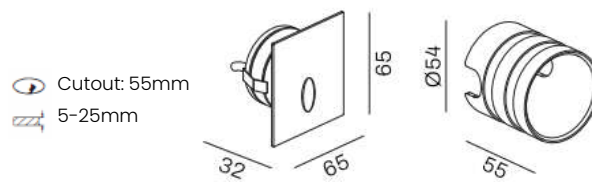

Lavori Square Spray 24V 55

24V constant voltage dimming;
Integrate aluminum body;
IP65;

TL-WL-3110

Light Source

3W 63lm, 24V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with LED driver.

Accessories

Stainless steel clip;
Premarkt sleeve

Finishes

AW White
AB Black

Beam Angle



Lavori Square Pinhole 24V 55

24V constant voltage dimming;
Integrate aluminum body;
IP65;

TL-WL-3111

Light Source

3W 63lm, 24V, CRI>90, SDCM<3
LES03

Gear

This product is supplied with LED driver.

Accessories

Stainless steel clip;
Premarkt sleeve

Finishes



AW White
AB Black


Beam Angle





Sketch

 Cutout: 90x90mm
 5-25mm



Chia 100

Unique niche design;
Integrate aluminum body;
IP65;

TL-WL-3099

Light Source

5W 121lm, 350mA 12V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with built-in gear.

Finishes


☐ AW White
☒ AB Black

Beam Angle





Sketch

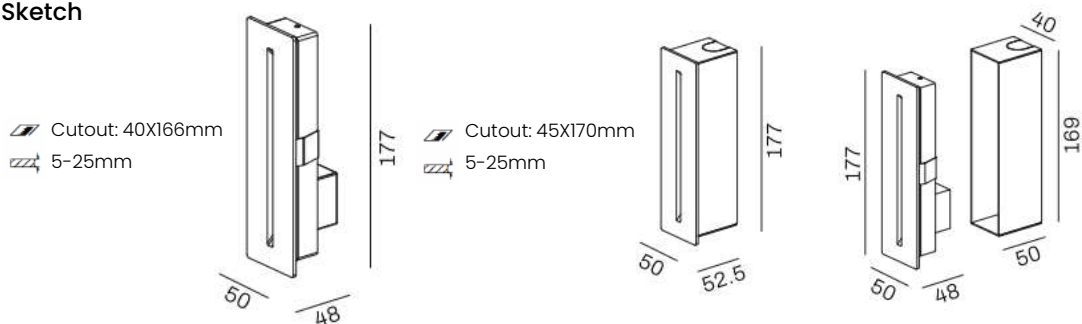

Wanda Exterior 200

Ultra slim body;
Low glare design;
IP65;

TL-WL-3089

Light Source

3W 80lm, 700mA 3V, CRI>90, SDCM<3
High power LED

Gear

This product is supplied with built-in gear.

Finishes

AW White
AB Black

Beam Angle



Light Distribution For 3000K

Medium 41.7°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 8.825 | Ø0.76 |
| 2 | 2.206 | Ø1.52 |
| 3 | 0.980 | Ø2.29 |
| 4 | 0.551 | Ø3.05 |
| 5 | 0.353 | Ø3.81 |


STHGI D FLOODLIGHTS

Flood Lights


Spots for garden;
Reliable & durable;



Sketch



Surface plate



Tree Strap

Pont Asymmetric 70

230V mains input;
Available with washer and snoot shield;
IP65;

TL-BS-3010

Light Source

10W 288lm, 250mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with built-in gear.

Accessories

Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle


24° 36° 60°


Light Distribution For 3000K

Medium 38.5°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1369 | Ø0.70 |
| 2 | 342.3 | Ø1.39 |
| 3 | 152.1 | Ø2.09 |
| 4 | 85.57 | Ø2.79 |
| 5 | 54.76 | Ø3.49 |

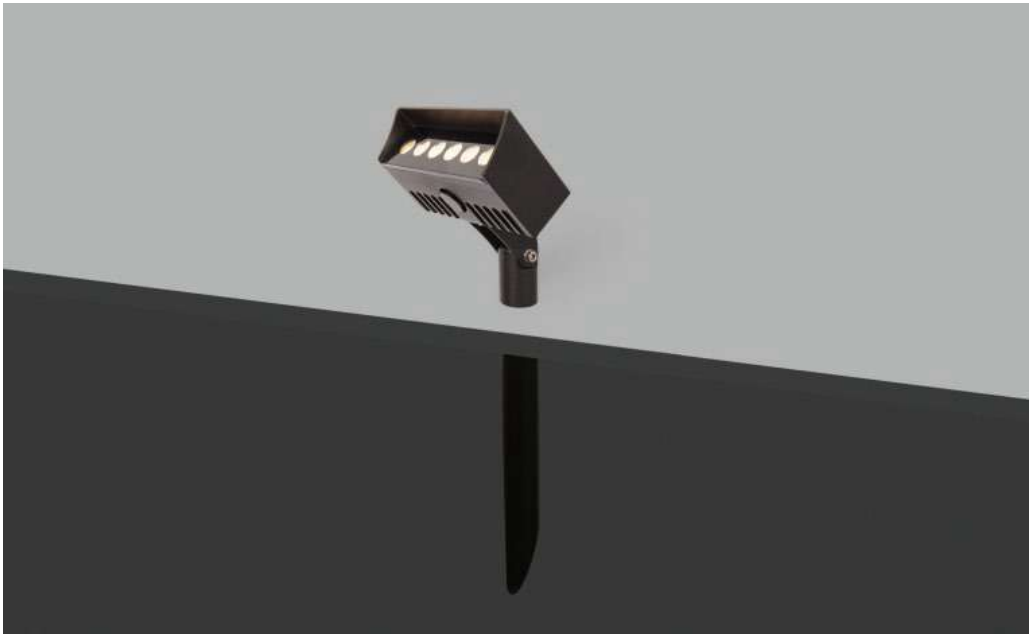

Sketch



Pont Washer 120

Integrate aluminium body;
Washer shield;
IP65;

TL-BS-3064

Light Source
9W 500lm, 500mA 18V, CRI>90, SDCM<3
High power LEDs

Gear
This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

20x40°



Light Distribution For 3000K Medium 26.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 919.8 | Ø0.47 |
| 2 | 230.0 | Ø0.94 |
| 3 | 102.2 | Ø1.40 |
| 4 | 57.49 | Ø1.87 |
| 5 | 36.79 | Ø2.34 |



Sketch



NEW Pont Jumbo 100

Powerful spike spot;
Low glare design;
IP65;

TL-BS-3006

Light Source

18W 1220lm, 500mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with built-in
power supply.

Accessories

Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle

15° 24° 36°


Light Distribution For 3000K

Spot 16.8°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 9271 | Ø0.28 |
| 2 | 2318 | Ø0.55 |
| 3 | 1030 | Ø0.83 |
| 4 | 579.4 | Ø1.11 |
| 5 | 370.8 | Ø1.38 |



Sketch

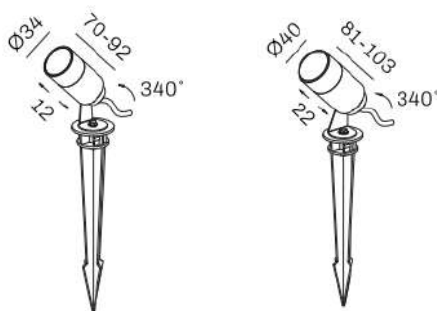

Boleto Spot 40

24V constant voltage dimming;
Zoom lens;
IP65;

TL-BS-3069

Light Source
6W 230lm, 24V, CRI>90, SDCM<3
LES06

Gear
This product is supplied with LED driver.

Accessories
Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle

13-80°
III
CE
IP65

Light Distribution For 3000K

Spot 13.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1375 | Ø0.23 |
| 2 | 343.8 | Ø0.47 |
| 3 | 152.8 | Ø0.70 |
| 4 | 85.96 | Ø0.93 |
| 5 | 55.01 | Ø1.17 |

Medium 34.4°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 478.2 | Ø0.62 |
| 2 | 119.6 | Ø1.24 |
| 3 | 53.14 | Ø1.86 |
| 4 | 29.89 | Ø2.48 |
| 5 | 19.13 | Ø3.10 |

Wide 81.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 238.7 | Ø1.72 |
| 2 | 59.68 | Ø3.43 |
| 3 | 26.53 | Ø5.15 |
| 4 | 14.92 | Ø6.86 |
| 5 | 9.549 | Ø8.58 |



Sketch



NEW Satori LV 60

24V constant voltage dimming;
0-90D adjustable, 0-25mm module
depth adjustable module design;
Easy maintenance;
Honeycomb louvre as accessory;

TL-BS-3090

Light Source
366lm, DC24V, CRI>90, SDCM<3
LES06

Gear
This product is supplied with LED driver.

Accessories
Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle


15° 24° 36° 28x37°
CE IP65

Light Distribution For 3000K
Medium 36.1°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 978 | Ø0.65 |
| 2 | 244 | Ø1.30 |
| 3 | 108 | Ø1.95 |
| 4 | 61.0 | Ø2.60 |
| 5 | 39.0 | Ø3.25 |



Sketch

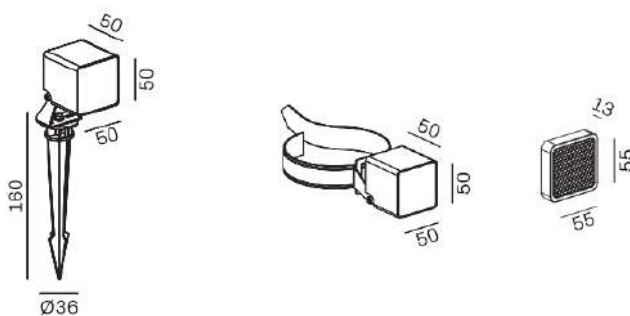

NEW Regolo 50

Cubic design;
Built-in power supply;
IP65;

TL-BS-3089

Light Source

6W 366lm, 150mA 31V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with built-in
power supply.

Accessories

Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle

15° 24° 36° 50°

CE IP65


Light Distribution For 3000K

Medium 21.5°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1692 | Ø0.65 |
| 2 | 423.0 | Ø1.30 |
| 3 | 188.0 | Ø1.95 |
| 4 | 105.7 | Ø2.60 |
| 5 | 67.68 | Ø3.25 |



Sketch

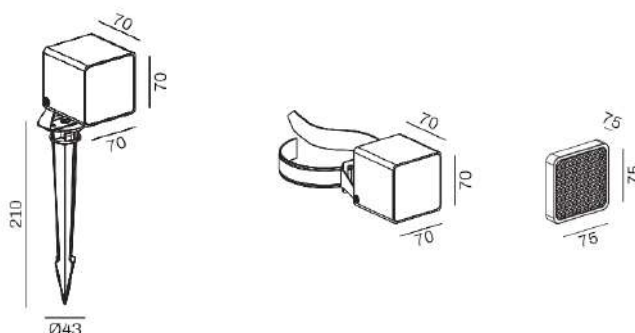

NEW Regolo 70

Cubic design;
Powerful spot;
Built-in driver;
Multiple beam angles;
IP65;

TL-BS-3087

Light Source

6W 488lm, 200mA 36V, CRI>90, SDCM<3
LES09

Gear

This product is supplied with built-in
power supply.

Accessories

Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle


15° 24° 36° 50°

Light Distribution For 3000K
Wide 36°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1539 | Ø0.65 |
| 2 | 384.8 | Ø1.30 |
| 3 | 171.0 | Ø1.95 |
| 4 | 96.20 | Ø2.61 |
| 5 | 61.57 | Ø3.26 |



Sketch



NEW **Tano**
Asymmetric 45

Cubic design;
Built-in power supply;
IP65;

TL-BS-3101

Light Source
8W 272lm, DC24V, CRI>90, SDCM<3
LES06

Gear
This product is supplied with LED driver.

Accessories
Honeycomb louvre

Finishes

AW White
AB Black

Beam Angle


15° 24° 36°
III CE IP65

Light Distribution For 2700K
Medium 24°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1355 | Ø0.44 |
| 2 | 338.7 | Ø0.89 |
| 3 | 150.5 | Ø1.33 |
| 4 | 84.68 | Ø1.78 |
| 5 | 54.19 | Ø2.22 |



Sketch



NEW Perla 20

L shape spike for garden;
Diffused light;
IP65;

TL-BS-3075

Light Source

4W 200lm, DC24V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle

80°
III
CE
IP65



Sketch



NEW Squash 20

Constant voltage 12V input;
Spike light for outdoor use;
PMMA illuminating top;
IP65 suitable for outdoor lawn and
garden area;

Light Source
4.5W 148lm, 12V, CRI>90, SDCM<3
SMD LEDs

Gear
This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle





TL-BS-3078 / TL-BS-3079

Light Distribution For 3000K Wide 134°

| h(m) | E(lx) | ø(m) |
|------|-------|--------|
| 1 | 10.94 | Ø4.72 |
| 2 | 2.736 | Ø9.44 |
| 3 | 1.216 | Ø14.16 |
| 4 | 0.684 | Ø18.89 |
| 5 | 0.438 | Ø23.61 |



Sketch



NEW Squash 25

Brass base and spike;
PMMA top;
IP65;

TL-BS-3095

Light Source

4.5W 148lm, 12V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle





Sketch



NEW Lira 12

24V constant voltage dimming;
Dotless;
IP65;

TL-BS-3076 / TL-BS-3077

Light Source

6W 61.5lm, 24V, CRI>90, SDCM<3
SMD LEDs

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle



Light Distribution For 3000K

Spot 13.3°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1375 | Ø0.23 |
| 2 | 343.8 | Ø0.47 |
| 3 | 152.8 | Ø0.70 |
| 4 | 85.96 | Ø0.93 |
| 5 | 55.01 | Ø1.17 |

Medium 34.4°


| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 478.2 | Ø0.62 |
| 2 | 119.6 | Ø1.24 |
| 3 | 53.14 | Ø1.86 |
| 4 | 28.89 | Ø2.48 |
| 5 | 19.13 | Ø3.10 |

Wide 81.2°

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 2078 | Ø1.72 |
| 2 | 519.5 | Ø3.43 |
| 3 | 230.9 | Ø5.15 |
| 4 | 129.9 | Ø6.86 |
| 5 | 83.12 | Ø8.58 |



Sketch



NEW **Minion 15**

IP65 outdoor use;
Ultra slim tube with cylinder crystal top;
Decorative garden lighting;

TL-BS-3084

Light Source
0.5W 20lm, DC24V, CRI>90, SDCM<3
SMD LEDs

Gear
This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle





Sketch



NEW Reiki 120

Stylish spike light with dome top;
Frosted glass diffuser;
Solder free LED chip holder and thread-off
interchangeable front lid;
IP65;

Light Source

5W 350lm, 500mA 9V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with LED driver.

Finishes

AW White
AB Black

Beam Angle



TL-BS-3074

Bollards


A collection of classic bollards, suitable for paths and lawns.



BOLLARDS



Sketch



Benny 600

Adjustable twin spots;
Customized length;

TL-BS-3048

Light Source

2x7W 385lm, 24V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with built-in
power supply.

Accessories

Honeycomb louvre

Finishes


AW White
AB Black

Beam Angle





Sketch



NEW Regolo 100

Asymmetric silicon lens;
Light pours way out;
Dual color back sheet available;

TL-BS-3103

Light Source

2x7W 1600lm, 24V, CRI>90, SDCM<3
LES06

Gear

This product is supplied with built-in
power supply.

Accessories

Honeycomb louvre

Finishes


| | |
|----|-------------|
| AW | White |
| AB | Black |
| SG | Silver Grey |

Beam Angle






Sketch



Sketch

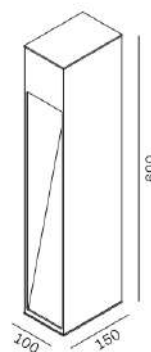

NEW Susy 300

Stylish design;
Light pours way out;
Dual color back sheet available;

TL-BS-3007A

Light Source

4W 220lm, 350mA 9V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with built-in gear.

Finishes

- AW** White
- AB** Black
- SG** Silver Grey

Beam Angle



NEW Susy 600

Stylish design;
Light pours way out;
Dual color back sheet available;

TL-BS-3007B

Light Source

4W 220lm, 350mA 9V, CRI>90, SDCM<3
LES06, LES09

Gear

This product is supplied with built-in gear.

Finishes

- AW** White
- AB** Black
- SG** Silver Grey

Beam Angle





A luminaire in which protection against electric shock does not rely on basic insulation only, but which includes an additional safety precaution in such a way that means are provided for the connection of accessible conductive parts to the protective (earthling) conductor in the fixed wiring of the installation in such a way that accessible conductive parts cannot become live in the event of a failure of the basic insulation.



A luminaire in which protection against electric shock does not rely on basic insulation only, but in which additional safety precautions such as double insulation or reinforced insulation are provided, there being no provision for protective earthing or reliance upon installation conditions.



A luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.



All products subject to the EMC guideline 89/336 (electromagnetic compatibility) and the guideline 73/23 (low-voltage) meet the requirements therein and bear the CE symbol on their packaging.

IP20

All luminaires meet the requirements of protection mode IP20 and are not marked. Other protection modes are specified for each product.



Protection mode IP44
Splash proof protection against splashes from all directions.



Protection mode IP65
Protection against dust and strong jets of water from all directions.



Protection mode IP67
Protection against dust and against the results of temporary immersion.



Protection mode IP68xm
Protection against dust and against the results of continuous submersion up to a depth of xm.

| | Type | Brand | Chip Series | CRI | SDCM | Forward Current | Voltage Type | LES |
|---|------------|-----------------|------------------|-----|------|-----------------|--------------|-------|
|  | SMD2835 | Osram | OSCONIQ E 2835 | 90 | 3 | 150mA | 3V | / |
|  | SMD5050 | Lumileds | LUXEON 5050 | 90 | 3 | 240mA | 24V | 5mm |
|  | High Power | Osram | Oslon Square | 90 | 3 | 1.5A | 3V | 3mm |
|  | | Lumileds | LUXEON Z ES | 90 | 3 | 1.5A | 3V | 2mm |
|  | COB | Citizen | CLU7A3-1201 | 90 | 2 | 200mA | 36V | 4mm |
|  | | Citizen | CLU703-1202 | 90 | 2 | 350mA | 36V | 6mm |
|  | | Citizen | CLU02Q-1202 | 90 | 2 | 460mA | 36V | 9.8mm |
|  | | Citizen | CLU031-1206 | 90 | 2 | 1.38A | 36V | 13mm |
|  | Dim2warm | vossloh-schwabe | WU-M-640-920/930 | 90 | 3 | 350mA | 18V | 6mm |
|  | Dim2warm | vossloh-schwabe | WU-M-618-920/930 | 90 | 3 | 350mA | 36V | 9.8mm |

Power Supply

| Type | Brand | Code | I out DC | V out DC | Dimensions (L x W x Hmm) |
|-----------|----------|-------------------------------|-------------|----------|--------------------------|
| ECG | Tridonic | LC 7/180/42 fixC SR ADV2 | 180mA | 30-42V | 100 x 43 x 22.5 mm |
| | | LC 8/200/42 fixC SR ADV2 | 200mA | 30-42V | 100 x 43 x 22.5 mm |
| | | LC 10/250/42 fixC SR ADV2 | 250mA | 30-42V | 100 x 43 x 22.5 mm |
| | | LC 14/350/42 fixC SR ADV2 | 350mA | 30-42V | 100 x 43 x 22.5 mm |
| | | LC 30/700/42 fixC SR ADV2 | 700mA | 33-42V | 127 x 43 x 30 mm |
| Phase-cut | Actec | D18009UF | 180mA | 25-50V | 115*39*22 mm |
| | | D20009UF | 200mA | 23-45V | 115*39*22 mm |
| | | D35009UF | 350mA | 11-26V | 115*39*22 mm |
| | | D23009UF | 230mA | 20-40V | 115*39*22 mm |
| | | D26012UF | 260mA | 24-46V | 115*39*22 mm |
| | | D35020UF | 350mA | 28-56V | 127*44*28 mm |
| | | D50020UF | 500mA | 20-44V | 127*44*28 mm |
| 0/1-10V | TCI | 123401 | 100mA-380mA | 20-53V | 110.4 x 52 x 22 |
| | | 125421 | 250mA-900mA | 15-53V | 103 x 67 x 21 |
| DALI | TCI | 123403 | 250-700mA | 15-43V | 110.4 x 52 x 22 |
| | | 127490 | 300-1050mA | 10-54V | 146.5 x 44 x 30 |
| | OSRAM | OTI DALI 15/220...240/1A0 LT2 | 150-1050mA | 7.5-54V | 95 x 53 x 30 |
| | | OTI DALI 35/220...240/1A0 LT2 | 350-1050mA | 15-54V | 103 x 67 x 29.5 |

